# Product description

Incandescent LED lamp GLS INNOLITE A19 provides the look and feel of traditional standard bulbs with the advantages of long-life, low-energy LED technology.

This light emits a cold light, suitable for places where good visibility is needed, such as offices, work areas in the kitchen and garages.

Being LEDs, our bulbs are 90% more efficient than incandescent bulbs and offer a much longer life than 25,000 hours +, making these bulbs a smart and beautiful investment.

With our intelligent technology, all our bulbs are suitable for dimmable or non-dimmable applications.



# Product Specifications

Model number:	37425	
Power	6W	
Light bulb finish	Clear Frosted	
Luminous flux	630lm ± 10%	580lm ± 10%
Equivalent to incandescent	50W	
LED Filament Spec	6 x 38mm	
Input voltage	220-240 VAC or 100-130 VAC.	
Material	Glass	
Color Temp (CCT)	2700 K - 6500 K	
Energy efficiency class	A ++	
Beam angle	360 °	
Color rendering index	[] 80 Ra	
Power factor	> 0.5	
Departure time	< 0.5S	
Switching cycle	≥12,500	
Lifetime	Up to 25,000 hours	
Lamp base	E27 / E26 / B22	
dimensions	Dia. = 60 mm	
	L = 106 mm	













### related products

Model number:	Power (W)	LED Filament Spec	Luminous flux (lm)	Equivalent incandescent bulb
37422	4W	4 x38	470lm ± 10%	40W
37424	6.5W	4 x52	806lm ± 10%	60W
37426	7.5W	6 x52	1055lm ± 10%	75W
37428	8W	8 x38	1055lm ± 10%	75W



## Product test report


Product Mark

Product Type :350311 6W 3000K Manufacturer :Innotech

Temperature :26'C Humidity :65%

Operator :01 Test Date :2018-02-01

Remark:

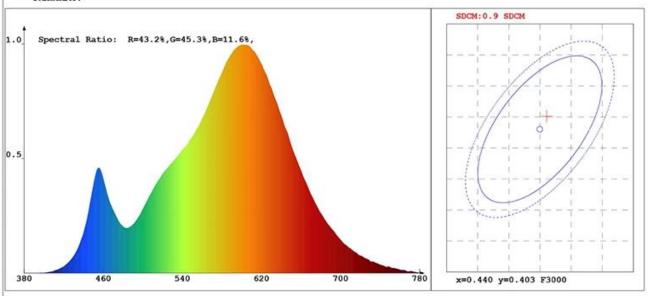

#### Chroma Parameters

Chro.Coor.:x=0.4411 y=0.4051 u=0.2529 v=0.3483 duv=-0.0002

CCT: 2938K Dominant Wave.:583.1nm Purity:54.0%

Flux RGB Ratio:R=23.0%,G=75.4%,B=1.6% Peak Wave:601.8nm Half Width:122.1nm

Rendering Index: Ra= 80.7

R1 =77 R2 =89 R3 =97 R4 =79 R5 =81 R6 =91 R7 =79 R8 =53

R9 =-2 R10=76 R11=77 R12=71 R13=79 R14=99 R15=69

Photo Parameters

Efficiency:0.096 Effi Level:A++ (EU 874-2012)

Ele. Parameters

Voltage:U=230.000V Current:I=0.0490A Power:P=6.33W Power Factor:PF=0.553



# Constant current IC driver inside for flicker free E27/B22/E26 etc. Exact retrofit for incandescent bulb Exact retrofit for incandescent bulb Exact retrofit for incandescent bulb Full glass housing with high-purity Helium filled for good heat release

#### Features & Advantages























- <sup>2</sup> The 360 ° beam angle offers uniform light distribution without creating shadows
- <sup>2</sup> Up to 90% energy savings with the new LED filament technology: 7 W LED equivalent to a 60 W incandescent bulb
- <sup>2</sup> Retrofit dimensions and classic vintage design for a traditional incandescent appearance
- <sup>2</sup> No flickering to protect human eyes
- <sup>2</sup> High CRI & gt; 80 guarantees a more vivid and natural light
- <sup>2</sup> Environmentally friendly: no lead or mercury and no UV or IR radiation
- <sup>2</sup> The long duration lasts up to 10 years (4 hours of use per day)
- <sup>2</sup> dimmable
- <sup>2</sup> Two-year limited warranty based on an average daily use of 4 hours
- <sup>2</sup> With CE / LVD / EMC / RoHS / ErP / SAA / ETL certification



**INNOLITE 6W A19 LED filament light bulb** It is suitable for home, kitchen, garden, dining room, living room, restaurant, cafe, bar, shop etc., inside and outside.

#### **Operation and maintenance**

- <sup>2</sup> Ambient temperature range from -20 ° C to 40 ° C.
- <sup>2</sup> Store and use the bulb / lamp in the same way as the traditional bulb / lamp.
- <sup>2</sup> Check that your appliances are correctly connected and do not provide voltage spikes to the bulb / lamp causing overheating / failure.
- <sup>2</sup> The bulb / lamp must be kept free from contamination.
- <sup>2</sup> A good condition of the lamp holder contacts is important to ensure the correct operation of the bulb / lamp.
- <sup>2</sup> Disconnect the mains supply before installing or removing the bulb / lamp.
- <sup>2</sup> Make sure the bulb / lamp is cold before removing it.

Warning: Discontinue use if damaged.

# **Application**











## Package

1 LED bulb per color box, then 50 pieces packed in a standard export carton. (1pc / color box, 50 pieces / carton)



## **Return policy**

We provide a FREE TWO YEAR LIMITED WARRANTY based on an average 4 hour daily use for this item. Returns must be requested:

- Step 1) Contact us with this e-mail website.
- Step 2) Provide as many details as possible about the problem encountered.
- Step 3) The authorization to return the item will be issued.

Step 4) Return the item for the agreed replacement or refund.



#### Q1.Are you a manufacturer?

A1: Yes, we are an experienced manufacturer with our molds and production lines.

#### Q2. What is the quality of the products?

A2: Our technicians and our quality control team test the products one by one using the aging line, devices and professional tools to ensure the quality of all products.

#### Q3. How much on the price?

A3: We are a manufacturer and always offer our customers the most competitive prices.

#### Q4. How to place an order?

A4: contact the online service or send us an e-mail directly, we will reply soon with the price of the product, the specifications, the packaging, etc. Thank you.

#### Q5. Can I buy samples from you?

A5: Yes! You are welcome to place the sample order to test our superior quality and service, mixed samples are acceptable.

#### Q6. Can I visit your factory?

A6: Yes, welcome to visit our factory at the appropriate time.

#### O7. How can I make OEM or ODM orders?

A7: We have a different print processing for different OEM / ODM orders. Please contact us with the online service or send us an e-mail directly.

#### Q8. How should I pay my orders?

A8: You can pay by T / T, L / C at sight would be available for qualified bank and MOQ required for each order.



Sample order ship by DHL, UPS, FedEx, TNT, EMS etc. For mass order delivery, can be optional with terms of Exwork, FOB, CNF, CIF by air or by sea based on the buyer's forwarder or ours



#### \* Certifications



#### Exhibition & Fair



#### Factory Show

