



## product Description

With a classic shape design, [Innolite LED 5.5W G45 clear Golf ball filament bulb](#) combines the familiar shape of classic incandescent G45 / P45 bulbs with the benefits of the long lasting LED technology. It can deliver a beautiful decorative warm white light and also is available in cool white for a bright light.

Unlike the traditional incandescent bulb, Our Innolite LED G45 clear golf ball filament bulb perfect replaces the 50W incandescent bulb, save over 90% on electricity bill of lighting.

[This golf ball LED filament bulb](#) also gives you the option to control the mood and set the tone with dimmable versions to choose from.



## Specification

model no.	37316
Power	5.5W
Cover type	Clear
Luminous flux	220lm $\pm$ 10%
Equivalent to bulb	50W
LED Filament Spec.	6 x 38 mm
Input voltage	220-240VAC or 110-130VAC
Material	Glass
Color Temp (CCT)	2700K - 6500K
Energy efficiency class	A ++
Beam Angle	360 °
Color Rendering Index	$\geq$ 80 Ra
Power factor	$\geq$ 0.5
start time	<0.5S
switching Cycle	$\geq$ 12,500
Lifetime	Up to 25,000 hours
lamp base	E12 E14 E26 E27 B22
Measure	Dia. = 45mm
	E14: L=77mm, E27: L=72mm



## product Certifications



## Related Products



model no.	Bulb Type	Wattal (W)	LED Filament Spec.	Luminous Flux (lm)	Equivalent bulb
-----------	-----------	------------	--------------------	--------------------	-----------------

37312	Golf ball G45 P45	2W	2 x38	220lm $\pm$ 10%	25W
37315		4W	4 x38	450lm $\pm$ 10%	40W



## Product Test Report

### Light Source Test Report

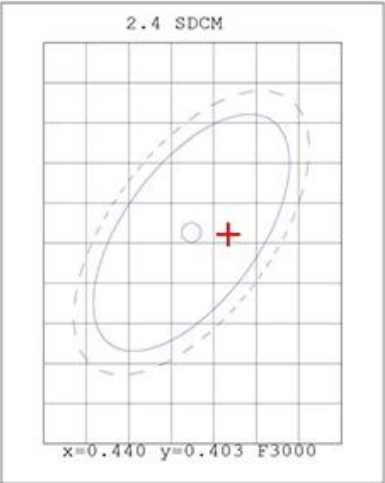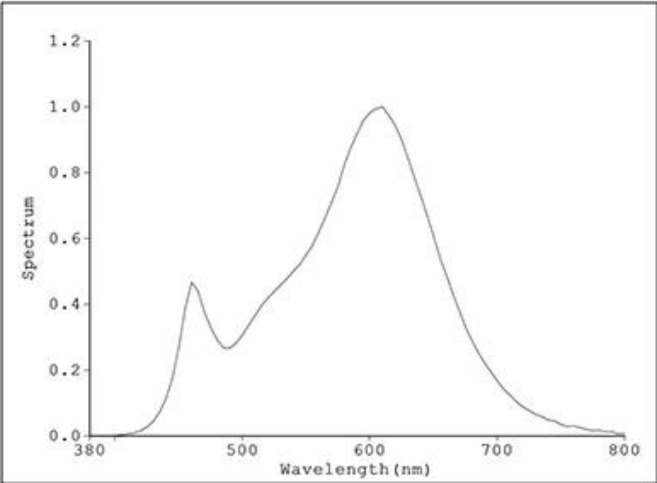

#### Color Parameters:

Chromaticity Coordinate: x=0.4437 (dx=-0.0019) y=0.4028 (dy=-0.0038)  
Chromaticity Coordinate: u'=0.2555 v'=0.5219 (duv=-1.36e-03)  
Tc=2879K Dominant WL:Ld=583.8nm Purity=54.1% Centroid WL:593.0nm  
Ratio:R=26.2% G=71.0% B=2.8% Peak WL:Lp=610.0nm HWL:119.1nm  
Render Index:Ra=84.5  
R1 =85 R2 =96 R3 =91 R4 =81 R5 =86 R6 =95 R7 =80  
R8 =60 R9 =16 R10=91 R11=82 R12=79 R13=88 R14=96 R15=77

#### Photo Parameters:

Flux: 603.40 lm Fe: 2.3639 W Efficacy:100.1 lm/W  
WHITE:ANSI\_3000K

#### Electrical Parameters:

Luminaire: U=231.3V I=0.05363A P=6.028W PF=0.5183  
Lamp : U=0V I=0A P=0W PF=1.000

#### Instrument Status:


Scan Range:380.0nm-800.0nm Interval:5.0nm[0]  
REF=26085 (R=3) %=-0.150%

Ip=19562 (G=5,D=56)  
PMT: 21.9 centigrade [21.4]




## product Exhibition

## LED Filament Bulb

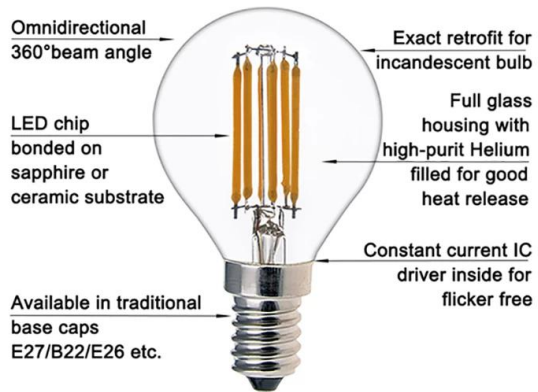

## Features & Advantages

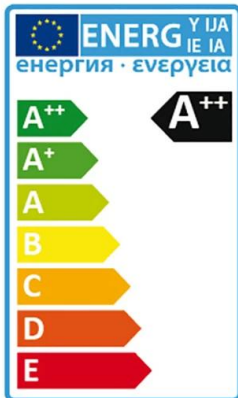



## advantages

- <sup>2</sup> 360 ° beam angle gives even distribution of light without creating shadows
- <sup>2</sup> Up to 90% energy saving with new LED([golf ball LED bulbs manufacturer](#)) filament technology: 7W LED equivalent to 60W incandescent bulb
- <sup>2</sup> Retrofit size and classic vintage design for traditional glowing looks
- <sup>2</sup> No flicker to protect human eyes
- <sup>2</sup> High CRI & gt; 80 guarantees more vibrant and natural light
- <sup>2</sup> Environmentally friendly: No lead or mercury and no UV or IR radiation
- <sup>2</sup> Long life lasts up to 10 years (4 hours usage per day)
- <sup>2</sup> dimmable
- <sup>2</sup> Two-year limited warranty based on average daily use of 4 hours
- <sup>2</sup> With CE / LVD / EMC / RoHS / ErP / SAA / ETL certification



## Application

[Innolite LED G45 clear golf ball filament bulb](#) is perfect for bathroom, dressing room, living room, dining room, porches, and patios; Perfect for hotels ,restaurants, coffee shops, and cafes, etc.

## Operation and maintenance

- <sup>2</sup> Ambient temperature range -20 ° C to 40 ° C.
- <sup>2</sup> Store and use the lamp / lamp in the same way as a traditional lamp / lamp.
- <sup>2</sup> Make sure your luminaires are properly connected and do not deliver voltage tip to the lamp / lamp that causes overheating / malfunction.
- <sup>2</sup> Lamp / lamp should be kept free from contamination.
- <sup>2</sup> Good contact with the lamp holder contacts is important to ensure that the lamp / lamp is working properly.
- <sup>2</sup> Switch off the mains voltage before installing or removing the lamp / lamp.
- <sup>2</sup> Make sure the lamp / lamp is cold before removing it.

**Warning:** Cancel use if it is damaged.

## Application



## Package

1 pc LED bulb per color box, then 100pcs packed in one standard export carton.(1pc/color box,100pcs/carton)



## return Policy

We provide a free two-year LIMITED WARRANTY based on the average daily use of 4 hours for this product. Should return be required

Step 1) Contact us with this site's email.

Step 2) Give as much detail as possible about the problem you have.

Step 3) Permission to return the item will be issued.



Step 4) Return the item for the agreed replacement or refund.



## **FAQ**

Q1. Are you a manufacturer?

A1: Yes, we are an experienced manufacturer with custom molds and production lines.

Q2.How about product quality?

A2: Our technicians and QC teams test the products one by one using aging line, professional devices and instruments to ensure the quality of all products.Q3.How about the price?

A3: We are a manufacturer and always offer our customers the most competitive prices.

Q4. Do you order?

A4: Contact with online service or send us an e-mail immediately, we will reply soon to product price, specifications, packaging, etc. Tack.Q5. Can I buy samples from you?

A5: Yes! You are welcome to place test orders to test our superior quality and service, mixed samples are acceptable.

Q6. Can I visit your factory?

A6: Yes, welcome to visit our factory at your appropriate time.

Q7. How can I make OEM or ODM orders?

A7: We have different print jobs for different OEM / ODM orders. Please contact us with online service or email us directly.

Q8. How do I pay for my orders?

A8: You can pay with T / T, L / C at the point of view would be available to qualified bank and MOQ required for each order.

## Logistics

Sample order ship by DHL, UPS, FedEx, TNT, EMS etc

For mass order delivery, can be optional with terms of Exwork, FOB, CNF, CIF by air or by sea based on the buyer's forwarder or ours



## Certifications



## Exhibition & Fair



## Factory Show

