



Product Description

[INNOLITE LED Classic GLS Filament Bulb A60](#) has the similar appearance as common A60 globe bulb, but it not only can save more energy than A60 tungsten filament bulb but also be more decorative than common LED A60 light bulb.

The case of the filament bulb is made of clear glass so the filaments could be seen directly. This LED filament bulb will evoke memories of the old incandescent bulbs, a practical advantage of the filament bulb is that the LEDs can be elevated for omnidirectional light, the same as an incandescent bulb.

[This A60 LED filaments bulb](#) is perfect for general lighting service used in chandelier, crystal lights, ceiling lights, restaurant pendant lights, ornamental lights, decorative light strands, or for any lighting application that accepts A60 globe bulb types with E26/E27 bases. This LED filament bulb could create a mixture of classic and modern styles for your home lighting so it is getting much more popular in the market.

ular in the market.



Product Specification

Model No.	37422	
Power	4W	
Bulb Finishing	Clear	Frosted
Luminous Flux	470lm ± 10%	400lm ± 10%
Equivalent to Incandescent	40W	
LED Filament Spec.	4 x 38mm	
Input Voltage	220-240VAC or 100-130VAC	
Material	Glass	
Color Temp (CCT)	2700K - 6500K	
Energy Efficiency Class	A++	
Beam Angle	360°	
Color Rendering Index	≥80 Ra	
Power factor	≥0.5	
Start Time	<0.5S	
Switching Cycle	≥12,500	
Life time	Up to 25,000 hours	
Lamp Base	E27/E26/B22	
Dimensions	Dia.=60mm	
	L=106mm	



Product Certificates

CE RoHS ErP



FC



Related Products

Model No.	Wattage(W)	LED Filament Spec.	Luminous Flux(lm)	Equivalent Incandescent Bulb
37425	6W	6 x38 / 4 x52	630lm \pm 10%	50W
37424	6.5W	4 x52	806lm \pm 10%	60W
37426	7.5W	6 x52	1055lm \pm 10%	75W
37428	8W	8 x38	1055lm \pm 10%	75W




Product Test Report

Product Mark

Product Type :350302 4W 4500K
Temperature :26'C
Operator :01
Remark:

Manufacturer :Innotech
Humidity :65%
Test Date :2018-02-01

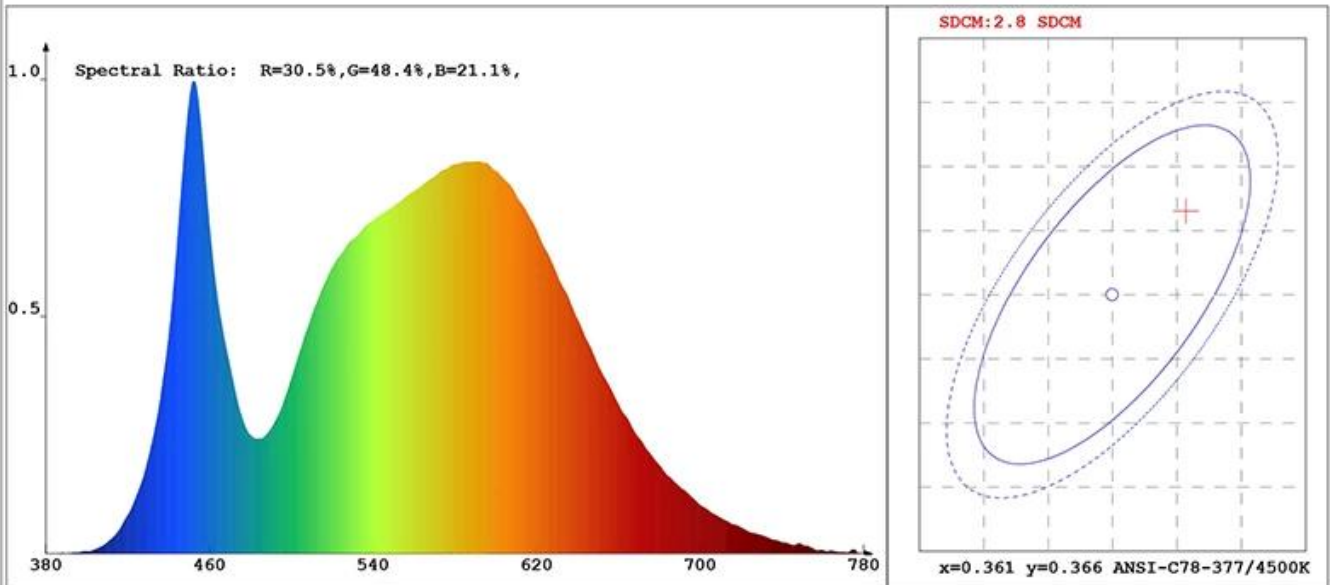

Chroma Parameters

Chro.Coor.:x=0.3668 y=0.3723 u=0.2179 v=0.3317 duv=0.0022
CCT: 4364K Dominant Wave.:576.2nm Purity:21.8%
Flux RGB Ratio:R=16.8%,G=80.7%,B=2.5% Peak Wave:452.3nm Half Width:24.5nm

Rendering Index:Ra= 80.6

R1 =79	R2 =86	R3 =91	R4 =80	R5 =78	R6 =80	R7 =87	R8 =64
R9 =2	R10=66	R11=77	R12=55	R13=80	R14=95	R15=73	

Photo Parameters

Flux:580.65lm Effi.:147.4lm/W Radiant:1690.9mW Iv:0.0mcd
Efficiency:0.079 Effi Level:A++ (EU 874-2012)


Ele. Parameters

Voltage:U=230.000V Current:I=0.0300A
Power:P=3.94W Power Factor:PF=0.558





Product show

LED Filament Bulb

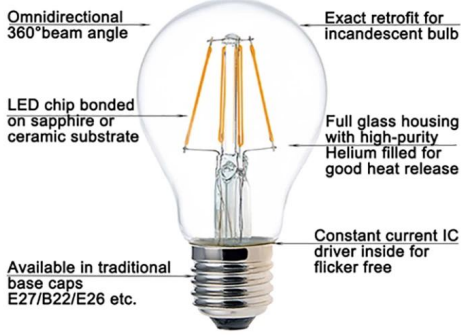

Features & Advantages

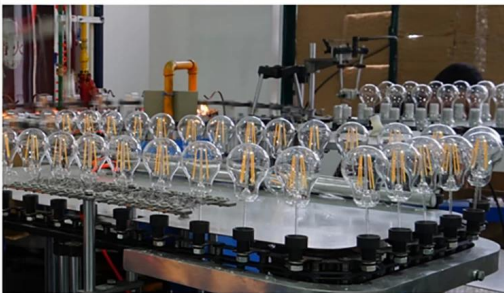



Advantages

- ² 360° beam angle delivers a even distribution of light without creating shadows
- ² Up to 90% energy saving with new LED filament technology: 7W LED equivalent to 60W incandescent bulb
- ² Retrofit size and classic vintage design for traditional incandescent look and feel
- ² No flicker to protect human eyes
- ² High CRI > 80 ensures more vivid and natural light
- ² Environment friendly: No lead or mercury and No UV or IR Radiation
- ² Long life time lasts up to 10 years (4 hours use per day)
- ² Dimmable
- ² Two years limited warranty based on average daily use of 4 hours
- ² With certification of CE/LVD/EMC/RoHS/ErP/SAA/ETL



Application

[INNOLITE GLS A60 4W LED Filament Bulb](#) provides perfect ambient light for dining-room, meeting room, living room, show room, hotel, shop, bistro, corridor, telephone booth, studio and exhibition etc. It is ideal for indoor use in bistro lights, large tents, decorative light strands, commercial light strings, chandeliers, crystal lights, ornamental fixtures, etc.

Operation and maintenance

- ² Ambient temperature range -20° C to 40°C.
- ² Store and use the bulb/lamp the same way as traditional bulb/lamp.
- ² Check your fixtures are properly wired and don't deliver voltage spike to bulb/lamp causing overheating/failure.
- ² Bulb/lamp should be kept free from contamination.
- ² Good condition of the lamp-holder contacts is important to ensure proper operation of bulb/lamp.
- ² Switch off mains supply before installing or removing bulb/lamp.
- ² Ensure bulb/lamp is cool before removing.

Warning: Discontinue use if damaged.

Application



Package

1 pc led bulb per color box, then 50pcs packed in one standard export carton.(1pc/color box,50pcs/carton)

Return Policy

We provide a free TWO YEARS LIMITED WARRANTY based on average daily use of 4 hours for this item.

Should returns be required:

Step 1) Contact us with this website email.

Step 2) Provide as much detail as possible about the problem you are having.

Step 3) Authorization to return the item will be issued.

Step 4) Return the item for the agreed replacement or refund.



Q1.Are you a manufacturer?

A1: Yes, we are an experienced manufacturer with our own molds and production lines.

Q2.How about quality of products?

A2: Our technicians and QC teams test the products one by one using aging line, professional devices and instruments to ensure the quality for all products.

Q3.How about price?

A3: We are a manufacturer and always offer our customers the most competitive prices.

Q4.How to place an order?

A4: Contact with online service, or sent email to us directly, we will reply to you with product price, specifications, packing etc. soon. Thank you.

Q5.May I buy samples from you?

A5: Yes! You are welcome to place sample order to test our superior quality and service, mixed samples are acceptable.

Q6.Can I visit your factory?

A6: Yes, welcome to visit our factory at your convenient time.

Q7.How can I make OEM or ODM orders?

A7: We have different print processing for different OEM/ODM orders. Please contact us with online service or send email to us directly.

Q8. How should I pay for my orders?

A8: You can pay by T/T, L/C at sight would be available for qualified bank and MOQ required for each order.

Logistics

Sample order ship by DHL, UPS, FedEx, TNT, EMS etc
 For mass order delivery, can be optional with terms of Exwork, FOB, CNF, CIF by air or by sea based on the buyer's forwarder or ours



Certifications



Exhibition & Fair



Factory Show

