



Web Site



Google Play

Innotech Industrial Co., Ltd.
+86-755-8276 9313, 8276 9316
+86-755-8276 9319
info@innolitech.com
www.ledlightingsupplierchina.com
#1201, 12/F., Anhui Building, No.6007
Shennan Road, Shenzhen, China.
f in t g+



*Caring for Nature
Caring for Life*

2017-2018

CATALOGUE

INNOLITE®
GREEN LIGHTING SOLUTION

ABOUT INNOTECH INDUSTRIAL COMPANY LIMITED



With brand name "INNOLITE™", Innotech Industrial Co., Ltd. was founded in Shenzhen, the first Special Economic Zone in China, in 2001.

In 17 years of successful company history, our company has established itself as one of the professional manufacturer and exporter in light source, residential and commercial lighting, who offers various energy-efficient and environmental friendly lighting products to customers in different countries and regions. Innovation spirit, quality-oriented and always show consideration for customers are the key to success for our business.



As the LED technology developed and popularized in the lighting industry, since 2008 Innotech Industrial Co., Ltd. concentrates its business on the research and development of LED drivers, heat management, optics and lamp design to manufacture the finished LED integral lamps with automatic production line. Especially with 360° beam angle, retro style and exact same size, most of our LED lamps are the perfect upgrade replacement for the traditional incandescent, halogen and fluorescent lamps with great energy saving and environmental friendly due to mercury free and no UV & IR radiation. Our mission is to be innovative through new design and to produce the high quality products at incredible value.



With a professional R&D team, complete testing facilities and sophisticated equipments, we always keep thorough tests on our products including directional and non-directional LED lamps, LED tube lights, panels, downlights, floodlights and string lights, etc. to ensure the excellence of our products and ever-growing improvements. With rich experience and sales efficiency, our customers can expect an answer to any queries at the soonest time.

In addition to quality management and environmental concerns, Innotech Industrial Co., Ltd. is also committed to the well-being of its employees, participating with the Business Social Compliance Initiative (BSCI) to ensure this. The BSCI commits to provide with fair living and working environments for its factory employees, continuously improving the standards of working conditions, workers' rights, fair pay and fair working hours, amongst many more.



As a modern and future-oriented company, we offer excellent products, outstanding service and extensive know-how that serve only one purpose, namely to completely satisfy our customers all over the world.

Welcome to Innotech Industrial Co., Ltd. for Green Lighting Solution and we are happy to work closely with our customers to ensure they always get what they want.



FACTORY BUILDING



OFFICE



SHOW ROOM



PRODUCTION WORKSHOP I



PRODUCTION WORKSHOP II



PRODUCTION WORKSHOP III



PRODUCT AGING WORKSHOP



R & D DEPARTMENT



OVERSEAS EXHIBITION



Certificates

DEKRA CE
ROHS
TUV

BSCI
ETL
SAA



TABLE OF CONTENTS

A 1–26

Giant LED Filament Bulbs

When big is not big enough, INNOLITE® Giant LED Filament Bulbs make a remarkable statement with their XXL size. These huge eye-catching items are used in the wide open space such as lofts, restaurants and bars to create trendy and retro atmosphere.

C 37–42

Flexible LED Filament Bulbs

With the new technology innovation, INNOLITE® Flexible LED Filament Bulbs are the newest line in the decorative LED filament items and bring back the familiar "tungsten" feeling in LED.

E 53–58

Full Glass LED Bulbs

INNOLITE® full glass LED bulbs are the complete solution to replace incandescent bulbs in frosted and opal for different shapes and base caps.

B 27–36

Vintage LED Filament Bulbs

With same soft lighting, identical warm feeling and completely dimmable, INNOLITE® Vintage LED Filament Bulbs are the perfect substitute for the beloved Edison antique bulbs in various shapes and finishes.

D 43–52

LED Filament Bulbs

With 360° beam angle, highest energy efficiency class A++, up to 90% energy saving and environmental friendly (Mercury free & No UV radiation), INNOLITE® LED Filament Bulbs are the direct replacement for incandescent bulbs in different shapes and finishes.

F 59–68

Conventional PCA LED Bulbs

With Plastic Clad Aluminum (PCA) housing, INNOLITE® conventional PCA LED Bulbs are the economical replacement for CFL and incandescent bulbs in various shapes, and offer a wide range of retrofit lamps.

G 69–74

G9 / G4 / R7S LED Light Bulbs

Expand your LED experience by applying INNOLITE® G9, G4 and R7S LED bulbs to decorative luminaires, chandeliers, floor lights and floodlights, you will experience a crystalline, cozy and diffused luminous effect with great energy saving.

I 85–90

LED Tube Lights

With more than 50% energy saving, five times longer life span, full glass or PCA housing, INNOLITE® LED tubes are the perfect replacement for all traditional T8 / T5 fluorescent tubes in various length, that offer a wide range of retrofit luminaires.

K 101–106

LED Floodlights

Discover LED technology by applying INNOLITE® LED Floodlights (Projectors) in outdoor areas such as gardens, building facades, bridges and tunnels, you will experience a diffuse and versatile light effect with different colors of light.

M 111–112

Pendant Lamp Cords

H 75–84

GU10 / MR16 LED Spotlights

With more than 80% energy saving, 15 times longer life span and our complete LED solution for full range of halogen GU10 / MR16 reflector lamps, especially our INNOLITE® "Crystal" items with glass housing bring back the familiar "halogen" feeling in LED.

J 91–100

LED Panel Lights / Panel Downlights

With diffused, uniform and comfortable illumination effects, INNOLITE® LED panel lights and panel downlights are the new upgrade replacement for all traditional recessed & surface louvre luminaires, troffer and downlights in office, conference hall, school, hospital, gym, kitchen, Sanitary and balneal room, etc.

L 107–110

LED String Lights

Bring a little sparkle in your home garden! INNOLITE® LED String Lights will glitter like gemstones in the night on your balcony, windowsill, terrace, and in your yard of living room during wedding, anniversaries or holiday celebration. It is best suited for the romantic and celebrative moods no matter indoor or outdoor.

N 113–116

Energy Saving Halogen Bulbs



INNOLITE®
GREEN LIGHTING SOLUTION



Giant LED Filament Bulbs

When big is not big enough, INNOLITE® Giant LED Filament Bulbs make a remarkable statement with their XXL size. These huge eye-catching items are used in the wide open space such as lofts, restaurants and bars to create trendy and retro atmosphere.

I N N O L I T E®



Model No.	39011	39012	39013	39021	39022	39023
Bulb Type	P160	P160	P160	P180	P180	P180
Wattage	4W	8W	12W	4W	8W	12W
LED Filament Spec.	4x67	8x67	12x67	4x67	8x67	12x67
Luminous Flux	320lm±10%	560lm±10%	800lm±10%	320lm±10%	560lm±10%	800lm±10%
Glass Color	Clear/Amber/Smoke		Clear/Amber/Smoke		Clear/Amber/Smoke	
Voltage	220~240VAC or 110~130VAC		220~240VAC or 110~130VAC		220~240VAC or 110~130VAC	
Power Factor	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50
Energy Efficiency Class	A+	A+	A+	A+	A+	A+
Life Time	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h
Beam Angle	360°	360°	360°	360°	360°	360°
Lamp Base	E26, E27, B22, E39, E40		E26, E27, B22, E39, E40		E26, E27, B22, E39, E40	
Temp. of Operation	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C
Dimensions	Ø160x285mm		Ø160x285mm		Ø180x320mm	
Color Temperature	1800K 3000K		1800K 3000K		1800K 3000K	

CE RoHS ErP



INNOLITE
GREEN LIGHTING SOLUTION

A

Giant LED
Filament Bulbs

P160



P180



INNOLITE®
GREEN LIGHTING SOLUTION



Giant LED
Filament Bulbs



Model No.	39031	39032	39033	39041	39042	39043
Bulb Type	G160	G160	G160	G180	G180	G180
Wattage	4W	6W	8W	4W	6W	8W
LED Filament Spec.	4x57	6x57	8x57	4x57	6x57	8x57
Luminous Flux	320lm±10%	450lm±10%	560lm±10%	320lm±10%	450lm±10%	560lm±10%
Glass Color	Clear/Amber/Smoke		Clear/Amber/Smoke		Clear/Amber/Smoke	
Voltage	220-240VAC or 110-130VAC		220-240VAC or 110-130VAC		220-240VAC or 110-130VAC	
Power Factor	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50
Energy Efficiency Class	A+	A+	A+	A+	A+	A+
Life Time	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h
Beam Angle	360°	360°	360°	360°	360°	360°
Lamp Base	E26, E27, B22, E39, E40		E26, E27, B22, E39, E40		E26, E27, B22, E39, E40	
Temp. of Operation	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C
Dimensions	Ø160x218mm	Ø160x218mm	Ø160x218mm	Ø180x240mm	Ø180x240mm	Ø180x240mm
Color Temperature	1800K 3000K		1800K 3000K		1800K 3000K	

CE RoHS ErP



INNOLITE
GREEN LIGHTING SOLUTION



Giant LED
Filament Bulbs



G200/G260/G300



Model No.	39051	39052	39061	39062	39063	39071	39072	39073
Bulb Type	G200	G200	G260	G260	G260	G300	G300	G300
Wattage	8W	12W	8W	12W	18W	8W	12W	18W
LED Filament Spec.	8x67	12x67	8x67	12x67	16x67	8x67	12x67	16x67
Luminous Flux	560lm±10%	800lm±10%	560lm±10%	800lm±10%	1000lm±10%	560lm±10%	800lm±10%	1000lm±10%
Glass Color	Clear/Amber/Smoke	Clear/Amber/Smoke	Clear/Amber/Smoke	Clear/Amber/Smoke	Clear/Amber/Smoke	Clear/Amber/Smoke	Clear/Amber/Smoke	Clear/Amber/Smoke
Voltage	220-240VAC or 110-130VAC	220-240VAC or 110-130VAC	220-240VAC or 110-130VAC	220-240VAC or 110-130VAC	220-240VAC or 110-130VAC	220-240VAC or 110-130VAC	220-240VAC or 110-130VAC	220-240VAC or 110-130VAC
Power Factor	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50
Energy Efficiency Class	A+	A+	A+	A+	A+	A+	A+	A+
Life Time	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h
Beam Angle	360°	360°	360°	360°	360°	360°	360°	360°
Lamp Base	E26, E27, B22, E39, E40	E26, E27, B22, E39, E40	E26, E27, B22, E39, E40	E26, E27, B22, E39, E40	E26, E27, B22, E39, E40	E26, E27, B22, E39, E40	E26, E27, B22, E39, E40	E26, E27, B22, E39, E40
Temp. of Operation	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C
Dimensions	Ø200x275mm	Ø200x275mm	Ø260x375mm	Ø260x375mm	Ø260x375mm	Ø300x395mm	Ø300x395mm	Ø300x395mm
Color Temperature	1800K 3000K		1800K 3000K		1800K 3000K		1800K 3000K	

CE RoHS ErP



INNOLITE
GREEN LIGHTING SOLUTION

A

Giant LED
Filament Bulbs

BT120



Model No.	39081	39082
Wattage	12W	18W
LED Filament Spec.	12x57	18x57
Luminous Flux	800lm±10%	1100lm±10%
Glass Color	Clear/Amber/Smoke	Clear/Amber/Smoke
Voltage	220~240VAC or 110~130VAC	
Power Factor	> 0.50	> 0.50
Energy Efficiency Class	A+	A+
Life Time	25,000h	25,000h
Beam Angle	360°	360°
Lamp Base	E26, E27, B22, E39, E40	E26, E27, B22, E39, E40
Temp. of Operation	-20°C ~ +40°C	-20°C ~ +40°C
Dimensions	Ø120x455mm	Ø120x455mm
Color Temperature		

CE RoHS ErP



Model No.	39091	39092
Wattage	8W	12W
LED Filament Spec.	8x67	12x67
Luminous Flux	560lm±10%	800lm±10%
Glass Color	Clear/Amber/Smoke	
Voltage	220~240VAC or 110~130VAC	
Power Factor	> 0.50	> 0.50
Energy Efficiency Class	A+	A+
Life Time	25,000h	25,000h
Beam Angle	360°	360°
Lamp Base	E26, E27, B22, E39, E40	E26, E27, B22, E39, E40
Temp. of Operation	-20°C ~ +40°C	-20°C ~ +40°C
Dimensions	Ø180x315mm	Ø180x315mm
Color Temperature	1800K 3000K	

CE RoHS ErP



CARING FOR LIFE

INNOLITE
GREEN LIGHTING SOLUTION



Giant LED
Filament Bulbs



BT180





INNOLITE
GREEN LIGHTING SOLUTION



Giant LED
Filament Bulbs



Model No.	39101	39102	39103	39111	39112	39121	39122	39123
Bulb Type	R160	R160	R160	R180	R180	R280	R280	R280
Wattage	4W	6W	8W	8W	12W	8W	12W	16W
LED Filament Spec.	4x67	6x67	8x67	8x67	12x67	8x67	12x67	16x67
Luminous Flux	320lm±10%	450lm±10%	560lm±10%	560lm±10%	800lm±10%	560lm±10%	800lm±10%	1000lm±10%
Glass Color	Clear/Amber/Smoke	Clear/Amber/Smoke	Clear/Amber/Smoke	Clear/Amber/Smoke	Clear/Amber/Smoke	Clear/Amber/Smoke	Clear/Amber/Smoke	Clear/Amber/Smoke
Voltage	220-240VAC or 110-130VAC	220-240VAC or 110-130VAC	220-240VAC or 110-130VAC	220-240VAC or 110-130VAC	220-240VAC or 110-130VAC	220-240VAC or 110-130VAC	220-240VAC or 110-130VAC	220-240VAC or 110-130VAC
Power Factor	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50
Energy Efficiency Class	A+	A+	A+	A+	A+	A+	A+	A+
Life Time	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h
Beam Angle	360°	360°	360°	360°	360°	360°	360°	360°
Lamp Base	E26, E27, B22, E39, E40	E26, E27, B22, E39, E40	E26, E27, B22, E39, E40	E26, E27, B22, E39, E40	E26, E27, B22, E39, E40	E26, E27, B22, E39, E40	E26, E27, B22, E39, E40	E26, E27, B22, E39, E40
Temp. of Operation	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C
Dimensions	Ø160x230mm	Ø160x230mm	Ø160x230mm	Ø180x297mm	Ø180x297mm	Ø280x405mm	Ø280x405mm	Ø280x405mm
Color Temperature								

CE RoHS ErP



Model No.	39131	39132	39133	39134	39135
Bulb Type	LF	ZF	DLF	DLF	DLF
Wattage	5W	7W	4W	8W	12W
LED Filament Spec.	6x38	8x38	4x67	8x67	12x67
Luminous Flux	380lm±10%	500lm±10%	320lm±10%	560lm±10%	800lm±10%
Glass Color	Clear/Amber/Smoke		Clear/Amber/Smoke		
Voltage	220-240VAC or 110-130VAC		220-240VAC or 110-130VAC		
Power Factor	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50
Energy Efficiency Class	A+	A+	A+	A+	A+
Life Time	25,000h	25,000h	25,000h	25,000h	25,000h
Beam Angle	360°	360°	360°	360°	360°
Lamp Base	E26, E27, B22, E39, E40		E26, E27, B22, E39, E40		
Temp. of Operation	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C
Dimensions	Ø75x330mm	Ø75x330mm	Ø75x330mm	Ø75x330mm	Ø75x330mm
Color Temperature	 1900K 3000K				

CE RoHS ErP



INNOLITE
GREEN LIGHTING SOLUTION



Giant LED
Filament Bulbs





Model No.	39601	39602
Bulb Type	P160	P180
Wattage	4W	4W
LED Filament Spec.	Spiral x1	Spiral x1
Luminous Flux	200lm±10%	200lm±10%
Glass Color	Clear/Amber/Smoke	Clear/Amber/Smoke
Voltage	220~240VAC or 110~130VAC	
Power Factor	> 0.50	> 0.50
Energy Efficiency Class	A+	A+
Life Time	25,000h	25,000h
Beam Angle	360°	360°
Lamp Base	E26, E27, B22, E39, E40	E26, E27, B22, E39, E40
Temp. of Operation	-20°C~+40°C	-20°C~+40°C
Dimensions	Ø160x285mm	Ø180x320mm
Color Temperature	1800K 3000K	

CE RoHS ErP



INNOLITE®
GREEN LIGHTING SOLUTION



Giant Flexible LED
Filament Bulbs





Model No.	39611
Bulb Type	BT180
Wattage	4W
LED Filament Spec.	Spiral x1
Luminous Flux	200lm±10%
Glass Color	Clear/Amben/Smoke
Voltage	220~240VAC or 110~130VAC
Power Factor	> 0.50
Energy Efficiency Class	A+
Life Time	25,000h
Beam Angle	360°
Lamp Base	E26, E27, B22, E39, E40
Temp. of Operation	-20°C ~ +40°C
Dimensions	Ø180x330mm
Color Temperature	 1800K 3000K

CE RoHS ErP



CARING FOR LIFE

INNOLITE®
GREEN LIGHTING SOLUTION



Giant Flexible LED
Filament Bulbs



BT180 FLEX



INNOLITE®
GREEN LIGHTING SOLUTION



Giant Flexible LED
Filament Bulbs



**G160/G180
FLEX**



Model No.	39621	39622
Bulb Type	G160	G180
Wattage	4W	4W
LED Filament Spec.	Spiral x1	Spiral x1
Luminous Flux	200lm±10%	200lm±10%
Glass Color	Clear/Amber/Smoke	Clear/Amber/Smoke
Voltage	220-240VAC or 110-130VAC	
Power Factor	> 0.50	> 0.50
Energy Efficiency Class	A+	A+
Life Time	25,000h	25,000h
Beam Angle	360°	360°
Lamp Base	E26, E27, B22, E39, E40	E26, E27, B22, E39, E40
Temp. of Operation	-20°C~+40°C	-20°C~+40°C
Dimensions	Ø160x218mm	Ø180x240mm
Color Temperature		

CE RoHS ErP



INNOLITE®
GREEN LIGHTING SOLUTION



Giant Flexible LED
Filament Bulbs



**G200/G260/
G300 FLEX**



Model No.	39631	39632	39633
Bulb Type	G200	G260	G300
Wattage	4W	4W	4W
LED Filament Spec.	Spiral x1	Spiral x1	Spiral x1
Luminous Flux	200lm±10%	200lm±10%	200lm±10%
Glass Color	Clear/Amber/Smoke	Clear/Amber/Smoke	Clear/Amber/Smoke
Voltage	220~240VAC or 110~130VAC		
Power Factor	> 0.50	> 0.50	> 0.50
Energy Efficiency Class	A+	A+	A+
Life Time	25,000h	25,000h	25,000h
Beam Angle	360°	360°	360°
Lamp Base	E26, E27, B22, E39, E40	E26, E27, B22, E39, E40	E26, E27, B22, E39, E40
Temp. of Operation	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C
Dimensions	Ø200x275mm	Ø260x375mm	Ø300x395mm
Color Temperature	 1800K 3000K		



CE RoHS ErP



INNOLITE®
GREEN LIGHTING SOLUTION



Giant Flexible LED
Filament Bulbs

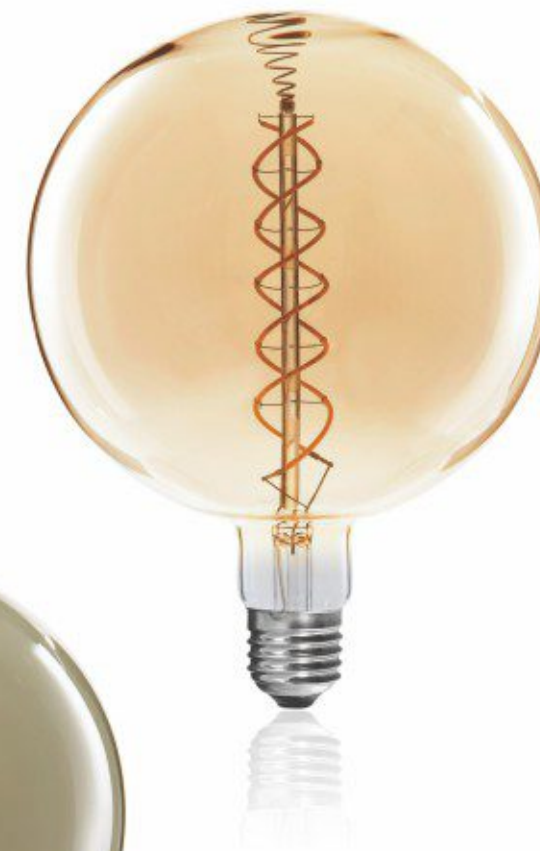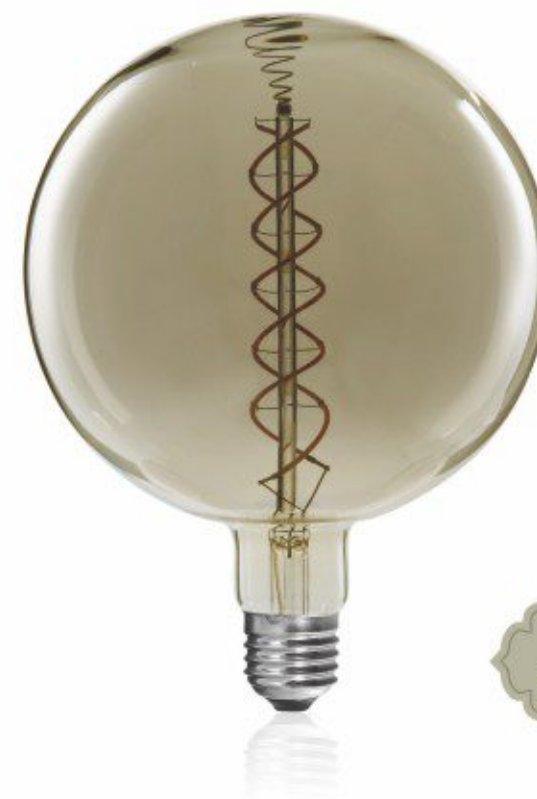

**G200/G260/
G300 FLEX DS**



Model No.	39641	39642	39643
Bulb Type	G200	G260	G300
Wattage	6W	6W	6W
LED Filament Spec.	Spiral x2	Spiral x2	Spiral x2
Luminous Flux	300lm±10%	300lm±10%	300lm±10%
Glass Color	Clear/Amber/Smoke	Clear/Amber/Smoke	Clear/Amber/Smoke
Voltage	220~240VAC or 110~130VAC		
Power Factor	> 0.50	> 0.50	> 0.50
Energy Efficiency Class	A+	A+	A+
Life Time	25,000h	25,000h	25,000h
Beam Angle	360°	360°	360°
Lamp Base	E26, E27, B22, E39, E40	E26, E27, B22, E39, E40	E26, E27, B22, E39, E40
Temp. of Operation	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C
Dimensions	Ø200x275mm	Ø260x375mm	Ø300x395mm
Color Temperature	 1800K 3000K		

CE RoHS ErP

B

Vintage LED
Filament Bulbs

With same soft lighting,
identical warm feeling and
completely dimmable,
INNOLITE® Vintage LED
Filament Bulbs are the perfect
substitute for the beloved
Edison antique bulbs in various
shapes and finishes.

I N N O L I T E®



Classic
ST58/ST64



Model No.	37721	37722	37723	37831	37832	37833	37731	37732	37733	37821	37822	37823
Bulb Type	ST58	ST58	ST58	ST58	ST58	ST58	ST64	ST64	ST64	ST64	ST64	ST64
Wattage	2W	4W	6W	2W	4W	6W	2W	4W	6W	2W	4W	6W
LED Filament Spec.	2x38	4x38	6x38	2x67	4x67	6x67	2x38	4x38	6x38	2x67	4x67	6x67
Luminous Flux	160lm±10%	320lm±10%	450lm±10%	160lm±10%	320lm±10%	450lm±10%	160lm±10%	320lm±10%	450lm±10%	160lm±10%	320lm±10%	450lm±10%
Glass Color	Amber/Smoke			Amber/Smoke			Amber/Smoke			Amber/Smoke		
Voltage	220-240VAC or 110-130VAC			220-240VAC or 110-130VAC			220-240VAC or 110-130VAC			220-240VAC or 110-130VAC		
Power Factor	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50
Energy Efficiency Class	A+	A+	A+	A+	A+	A+	A+	A+	A+	A+	A+	A+
Life Time	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h
Beam Angle	360°	360°	360°	360°	360°	360°	360°	360°	360°	360°	360°	360°
Lamp Base	E26, E27, B22			E26, E27, B22			E26, E27, B22			E26, E27, B22		
Temp. of Operation	-20°C ~ +40°C			-20°C ~ +40°C			-20°C ~ +40°C			-20°C ~ +40°C		
Dimensions	Ø58x130mm			Ø58x130mm			Ø64x140mm			Ø64x140mm		
Color Temperature	1800K 3000K			1800K 3000K			1800K 3000K			1800K 3000K		

B
Vintage LED
Filament Bulbs



**Globe
G80/G95/G125**



Model No.	37540	37541	37542	37530	37531	37532	37550	37551	37552
Bulb Type	G80	G80	G80	G95	G95	G95	G125	G125	G125
Wattage	2W	4W	6W	2W	4W	6W	2W	4W	6W
LED Filament Spec.	2x38	4x38	6x38	2x38	4x38	6x38	2x38	4x38	6x38
Luminous Flux	160lm±10%	320lm±10%	450lm±10%	160lm±10%	320lm±10%	450lm±10%	160lm±10%	320lm±10%	450lm±10%
Glass Color	Amber/Smoke	Amber/Smoke	Amber/Smoke	Amber/Smoke	Amber/Smoke	Amber/Smoke	Amber/Smoke	Amber/Smoke	Amber/Smoke
Voltage	220~240VAC or 110~130VAC			220~240VAC or 110~130VAC			220~240VAC or 110~130VAC		
Power Factor	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50
Energy Efficiency Class	A+	A+	A+	A+	A+	A+	A+	A+	A+
Life Time	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h
Beam Angle	360°	360°	360°	360°	360°	360°	360°	360°	360°
Lamp Base	E26, E27, B22	E26, E27, B22	E26, E27, B22	E26, E27, B22	E26, E27, B22	E26, E27, B22	E26, E27, B22	E26, E27, B22	E26, E27, B22
Temp. of Operation	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C
Dimensions	Ø80x120mm	Ø80x120mm	Ø80x120mm	Ø95x140mm	Ø95x140mm	Ø95x140mm	Ø125x175mm	Ø125x175mm	Ø125x175mm
Color Temperature	1800K 3000K			1800K 3000K			1800K 3000K		

CE RoHS ErP SAA FC


**Globe
G95/G125**



Model No.	37801	37802	37803	37811	37812	37813	37810
Bulb Type	G95	G95	G95	G125	G125	G125	G125
Wattage	2W	4W	6W	2W	4W	6W	6W
LED Filament Spec.	2x67	4x67	6x67	2x87	4x87	6x87	6x87
Luminous Flux	160lm±10%	320lm±10%	450lm±10%	160lm±10%	320lm±10%	450lm±10%	450lm±10%
Glass Color	Amber/Smoke	Amber/Smoke	Amber/Smoke	Amber/Smoke	Amber/Smoke	Amber/Smoke	Amber/Smoke
Voltage	220~240VAC or 110~130VAC			220~240VAC or 110~130VAC			220~240VAC or 110~130VAC
Power Factor	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50
Energy Efficiency Class	A+	A+	A+	A+	A+	A+	A+
Life Time	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h
Beam Angle	360°	360°	360°	360°	360°	360°	360°
Lamp Base	E26, E27, B22	E26, E27, B22	E26, E27, B22	E26, E27, B22	E26, E27, B22	E26, E27, B22	E26, E27, B22
Temp. of Operation	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C
Dimensions	Ø95x140mm	Ø95x140mm	Ø95x140mm	Ø125x175mm	Ø125x175mm	Ø125x175mm	Ø125x175mm
Color Temperature	1800K 3000K			1800K 3000K			1800K 3000K

CE RoHS ErP SAA FC

B
Vintage LED
Filament Bulbs

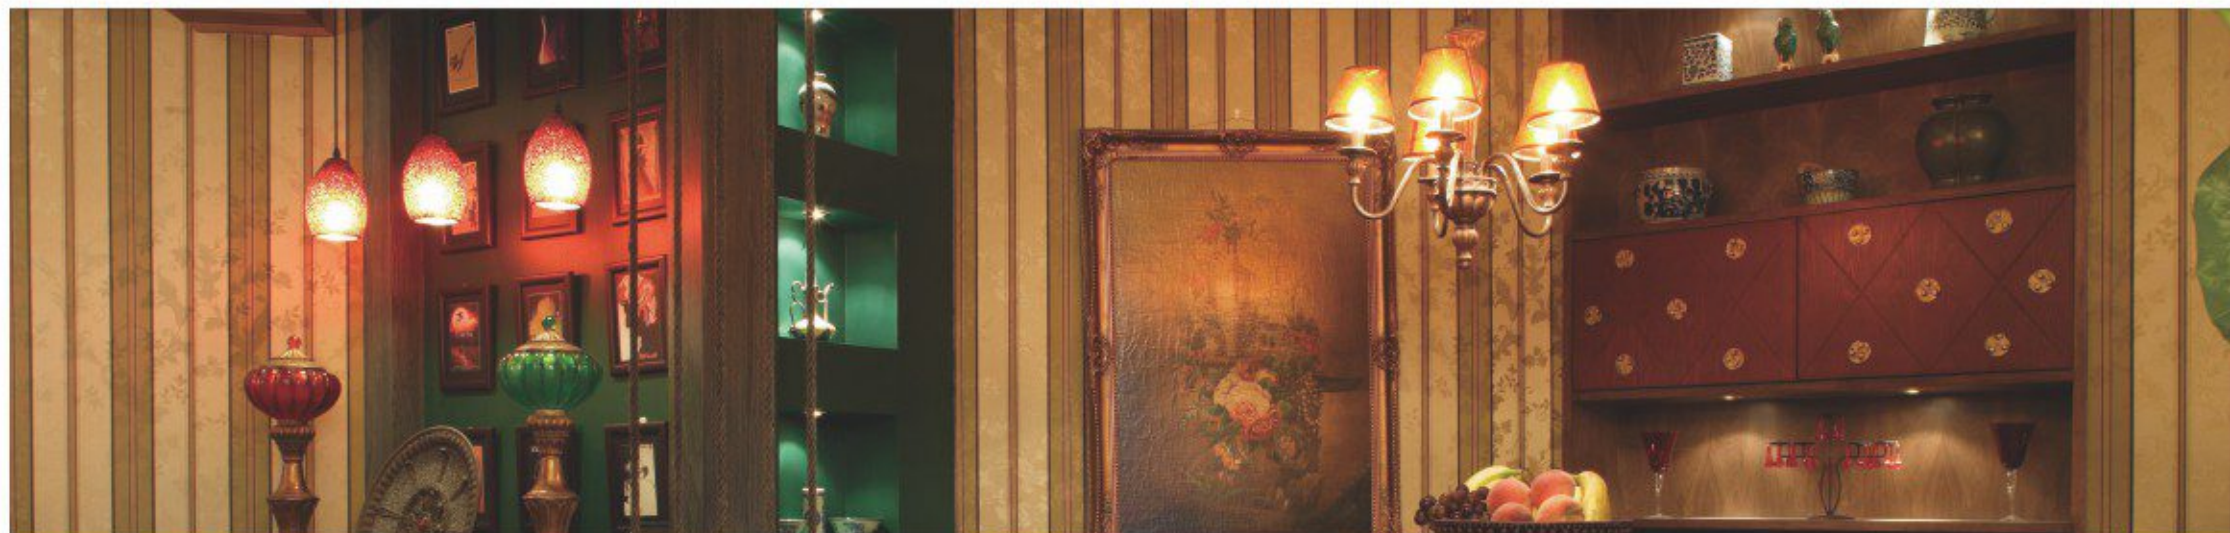

**L-Diamond
LD-115**



**T-Diamond
TD-115**



Model No.	37841	37842	37843	37851	37852	37853
Bulb Type	LD-115	LD-115	LD-115	TD-115	TD-115	TD-115
Wattage	2W	4W	6W	2W	4W	6W
LED Filament Spec.	2x38	4x38	6x38	2x38	4x38	6x38
Luminous Flux	160lm±10%	320lm±10%	450lm±10%	160lm±10%	320lm±10%	450lm±10%
Glass Color	Amber/Smoke	Amber/Smoke	Amber/Smoke	Amber/Smoke	Amber/Smoke	Amber/Smoke
Voltage	220-240VAC or 110-130VAC		220-240VAC or 110-130VAC		220-240VAC or 110-130VAC	
Power Factor	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50
Energy Efficiency Class	A+	A+	A+	A+	A+	A+
Life Time	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h
Beam Angle	360°	360°	360°	360°	360°	360°
Lamp Base	E26, E27, B22	E26, E27, B22	E26, E27, B22	E26, E27, B22	E26, E27, B22	E26, E27, B22
Temp. of Operation	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C
Dimensions	Ø115x138mm	Ø115x138mm	Ø115x138mm	Ø115x168mm	Ø115x168mm	Ø115x168mm
Color Temperature	1800K 3000K		1800K 3000K		1800K 3000K	

CE RoHS ErP

**Pineapple-D
PD-G95**



**Football
FB-G100**



Model No.	38071	38072	38073	38091	38092	38093
Bulb Type	PD-G95	PD-G95	PD-G95	FB-G100	FB-G100	FB-G100
Wattage	2W	4W	6W	2W	4W	6W
LED Filament Spec.	2x38	4x38	6x38	2x38	4x38	6x38
Luminous Flux	160lm±10%	320lm±10%	450lm±10%	160lm±10%	320lm±10%	450lm±10%
Glass Color	Amber/Smoke	Amber/Smoke	Amber/Smoke	Amber/Smoke	Amber/Smoke	Amber/Smoke
Voltage	220-240VAC or 110-130VAC		220-240VAC or 110-130VAC		220-240VAC or 110-130VAC	
Power Factor	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50
Energy Efficiency Class	A+	A+	A+	A+	A+	A+
Life Time	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h
Beam Angle	360°	360°	360°	360°	360°	360°
Lamp Base	E26, E27, B22	E26, E27, B22	E26, E27, B22	E26, E27, B22	E26, E27, B22	E26, E27, B22
Temp. of Operation	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C
Dimensions	Ø95x135mm	Ø95x135mm	Ø95x135mm	Ø100x130mm	Ø100x130mm	Ø100x130mm
Color Temperature	1800K 3000K		1800K 3000K		1800K 3000K	

CE RoHS ErP

B
Vintage LED
Filament Bulbs



**Grenade
G-G80**



**Pine Cone
PC-D72**



Model No.	37871	37872	37873	38081	38082	38083
Bulb Type	G-G80	G-G80	G-G80	PC-D72	PC-D72	PC-D72
Wattage	2W	4W	6W	2W	4W	6W
LED Filament Spec.	2x38	4x38	6x38	2x67	4x67	6x67
Luminous Flux	160lm±10%	320lm±10%	450lm±10%	160lm±10%	320lm±10%	450lm±10%
Glass Color	Amber/Smoke	Amber/Smoke	Amber/Smoke	Amber/Smoke	Amber/Smoke	Amber/Smoke
Voltage	220~240VAC or 110~130VAC	220~240VAC or 110~130VAC	220~240VAC or 110~130VAC	220~240VAC or 110~130VAC	220~240VAC or 110~130VAC	220~240VAC or 110~130VAC
Power Factor	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50
Energy Efficiency Class	A+	A+	A+	A+	A+	A+
Life Time	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h
Beam Angle	360°	360°	360°	360°	360°	360°
Lamp Base	E26, E27, B22	E26, E27, B22	E26, E27, B22	E26, E27, B22	E26, E27, B22	E26, E27, B22
Temp. of Operation	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C
Dimensions	Ø80x120mm	Ø80x120mm	Ø80x120mm	Ø72x180mm	Ø72x180mm	Ø72x180mm
Color Temperature	1800K 3000K		1800K 3000K		1800K 3000K	

CE RoHS ErP

**Lantern
L-D85**



Model No.	37865	37866	37867	37861	37862	37863
Wattage	2W	4W	6W	2W	4W	6W
LED Filament Spec.	2x38	4x38	6x38	2x67	4x67	6x67
Luminous Flux	160lm±10%	320lm±10%	450lm±10%	160lm±10%	320lm±10%	450lm±10%
Glass Color	Amber/Smoke	Amber/Smoke	Amber/Smoke	Amber/Smoke	Amber/Smoke	Amber/Smoke
Voltage	220~240VAC or 110~130VAC	220~240VAC or 110~130VAC	220~240VAC or 110~130VAC	220~240VAC or 110~130VAC	220~240VAC or 110~130VAC	220~240VAC or 110~130VAC
Power Factor	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50
Energy Efficiency Class	A+	A+	A+	A+	A+	A+
Life Time	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h
Beam Angle	360°	360°	360°	360°	360°	360°
Lamp Base	E26, E27, B22	E26, E27, B22	E26, E27, B22	E26, E27, B22	E26, E27, B22	E26, E27, B22
Temp. of Operation	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C
Dimensions	Ø85x110mm	Ø85x110mm	Ø85x110mm	Ø85x118mm	Ø85x118mm	Ø85x118mm
Color Temperature	1800K 3000K		1800K 3000K		1800K 3000K	

CE RoHS ErP

INNOLITE
GREEN LIGHTING SOLUTION

B

Vintage LED
Filament Bulbs




Classic S60



Model No.	37891	37892	37893
Wattage	2W	4W	6W
LED Filament Spec.	2x38	4x38	6x38
Luminous Flux	160lm±10%	320lm±10%	450lm±10%
Glass Color	Amber/Smoke	Amber/Smoke	Amber/Smoke
Voltage	220~240VAC or 110~130VAC		
Power Factor	> 0.50	> 0.50	> 0.50
Energy Efficiency Class	A+	A+	A+
Life Time	25,000h	25,000h	25,000h
Beam Angle	360°	360°	360°
Lamp Base	E26, E27, B22	E26, E27, B22	E26, E27, B22
Temp. of Operation	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C
Dimensions	Ø50x158mm	Ø60x158mm	Ø60x158mm
Color Temperature	1800K 3000K		

CE RoHS ErP

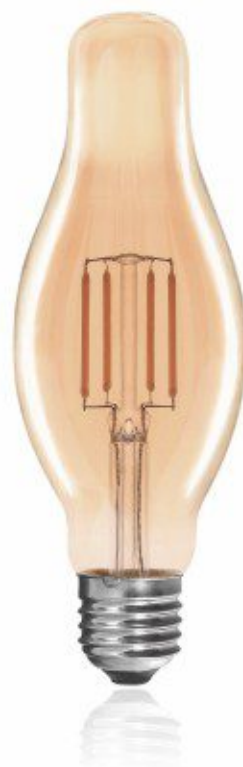


Tube T30-L300



Model No.	37881	37882	37883	37884
Wattage	4W	5W	6W	7W
LED Filament Spec.	5x38	6x38	7x38	8x38
Luminous Flux	320lm±10%	360lm±10%	450lm±10%	500lm±10%
Glass Color	Amber/Smoke	Amber/Smoke	Amber/Smoke	Amber/Smoke
Voltage	220~240VAC or 110~130VAC			
Power Factor	> 0.50	> 0.50	> 0.50	> 0.50
Energy Efficiency Class	A+	A+	A+	A+
Life Time	25,000h	25,000h	25,000h	25,000h
Beam Angle	360°	360°	360°	360°
Lamp Base	E26, E27, B22	E26, E27, B22	E26, E27, B22	E26, E27, B22
Temp. of Operation	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C
Dimensions	Ø30x300mm	Ø30x300mm	Ø30x300mm	Ø30x300mm
Color Temperature	1800K 3000K			

CE RoHS ErP EFC

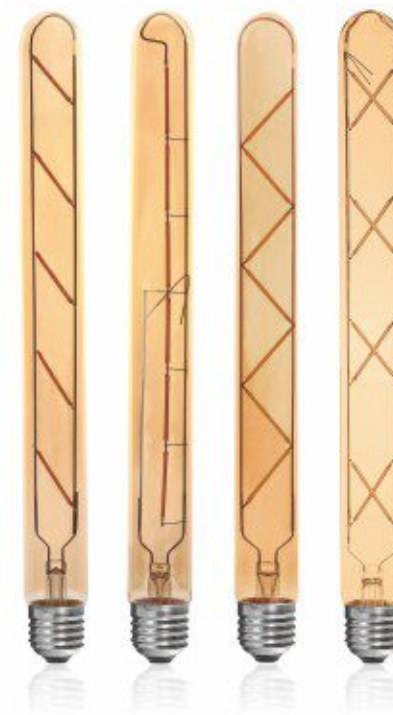

INNOLITE®
GREEN LIGHTING SOLUTION



Flexible LED Filament Bulbs

With the new technology innovation, INNOLITE® Flexible LED Filament Bulbs are the newest line in the decorative LED filament items and bring back the familiar "tungsten" feeling in LED.

I N N O L I T E®

CARING FOR LIFE



**GLS A19/
A60 FLEX**



Model No.	38602
Wattage	4W
LED Filament Spec.	Coil x1
Luminous Flux	200lm±10%
Glass Color	Clear/Amber/Smoke
Voltage	220~240VAC or 110~130VAC
Power Factor	> 0.50
Energy Efficiency Class	A+
Life Time	25,000h
Beam Angle	360°
Lamp Base	E26, E27, B22
Temp. of Operation	-20°C~+40°C
Dimensions	Ø60x107mm
Color Temperature	1800K 3000K

CE RoHS ErP



Flexible LED Filament Bulbs



Model No.	38642	38652
Bulb Type	G95	G125
Wattage	4W	4W
LED Filament Spec.	Spiral x1	Spiral x1
Luminous Flux	200lm±10%	200lm±10%
Glass Color	Clear/Amber/Smoke	
Voltage	220-240VAC or 110-130VAC	
Power Factor	> 0.50	> 0.50
Energy Efficiency Class	A+	A+
Life Time	25,000h	25,000h
Beam Angle	360°	360°
Lamp Base	E26, E27, B22	E26, E27, B22
Temp. of Operation	-20°C~+40°C	-20°C~+40°C
Dimensions	Ø95x140mm	Ø125x175mm
Color Temperature		

CE RoHS ErP

Globe G95/ G125 FLEX



Classic ST58/ ST64 FLEX




Model No.	38622	38632
Bulb Type	ST58	ST64
Wattage	4W	4W
LED Filament Spec.	Spiral x1	Spiral x1
Luminous Flux	200lm±10%	200lm±10%
Glass Color	Clear/Amber/Smoke	
Voltage	220-240VAC or 110-130VAC	
Power Factor	> 0.50	> 0.50
Energy Efficiency Class	A+	A+
Life Time	25,000h	25,000h
Beam Angle	360°	360°
Lamp Base	E26, E27, B22	E26, E27, B22
Temp. of Operation	-20°C~+40°C	-20°C~+40°C
Dimensions	Ø58x130mm	Ø64x140mm
Color Temperature		

CE RoHS ErP




Flexible LED
Filament Bulbs

Ellipse E90 FLEX

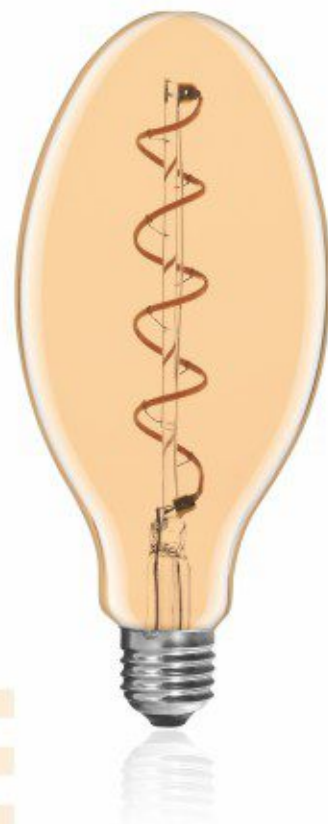

Model No.	38662
Wattage	4W
LED Filament Spec.	Spiral x1
Luminous Flux	200lm±10%
Glass Color	Clear/Amber/Smoke
Voltage	220~240VAC or 110~130VAC
Power Factor	> 0.50
Energy Efficiency Class	A+
Life Time	25,000h
Beam Angle	360°
Lamp Base	E26, E27, B22
Temp. of Operation	-20°C~+40°C
Dimensions	Ø90x220mm
Color Temperature	1800K 3000K

CE RoHS ErP

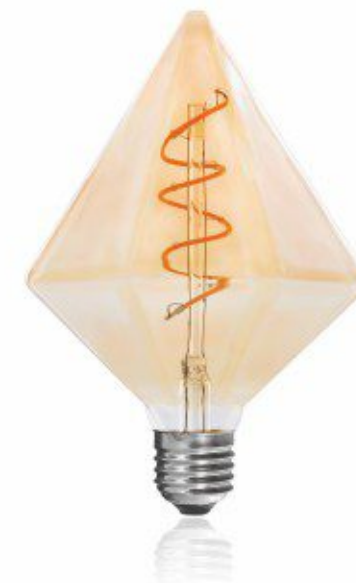

T-Diamond TD-115 FLEX




Model No.	38672
Wattage	4W
LED Filament Spec.	Spiral x1
Luminous Flux	200lm±10%
Glass Color	Clear/Amber/Smoke
Voltage	220~240VAC or 110~130VAC
Power Factor	> 0.50
Energy Efficiency Class	A+
Life Time	25,000h
Beam Angle	360°
Lamp Base	E26, E27, B22
Temp. of Operation	-20°C~+40°C
Dimensions	Ø115x168mm
Color Temperature	1800K 3000K

CE RoHS ErP

D
**LED Filament
Bulbs**

With 360° beam angle, highest energy efficiency class A++, up to 90% energy saving and environmental friendly (Mercury free & No UV radiation), INNOLITE® LED Filament Bulbs are the direct replacement for incandescent bulbs in different shapes and finishes.

I N N O L I T E®

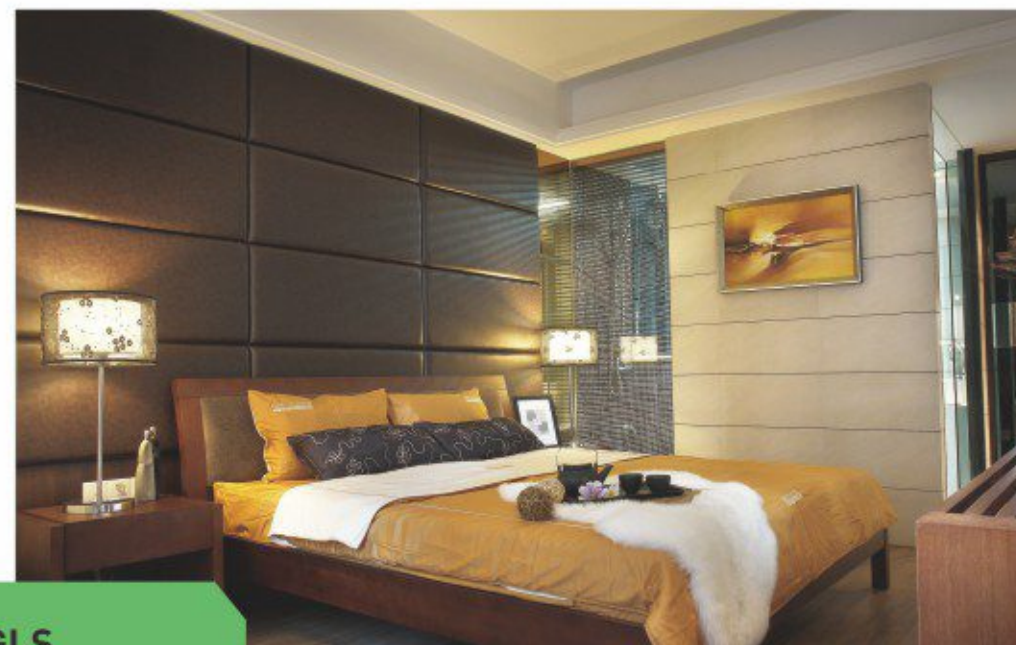

**GLS
A19/A60**



Model No.	37422	37425	37424	37426
Wattage	4W	6W	7W	8W
LED Filament Spec.	4x38	6x38	4x50	6x38
Luminous Flux	470lm±10%	630lm±10%	806lm±10%	1055lm±10%
Equivalent Incandescent	40W	50W	60W	75W
Voltage	220-240VAC or 110-130VAC	220-240VAC or 110-130VAC	220-240VAC or 110-130VAC	220-240VAC or 110-130VAC
Power Factor	> 0.50	> 0.50	> 0.50	> 0.50
Energy Efficiency Class	A++	A++	A++	A++
Life Time	25,000h	25,000h	25,000h	25,000h
Beam Angle	360°	360°	360°	360°
Lamp Base	E26, E27, B22	E26, E27, B22	E26, E27, B22	E26, E27, B22
Temp. of Operation	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C
Dimensions	Ø60x106mm	Ø60x106mm	Ø60x106mm	Ø60x106mm
Color Temperature				

CE RoHS ErP SAA ENEC FC





LED Filament
Bulbs



Candle C32/C35



Model No.	37242	37245	37246	37212	37215	37216
Bulb Type	C32	C32	C32	C35	C35	C35
Wattage	2W	4W	5.5W	2W	4W	5.5W
LED Filament Spec.	2x38	4x38	6x38	2x38	4x38	6x38
Luminous Flux	220lm±10%	450lm±10%	550lm±10%	220lm±10%	450lm±10%	550lm±10%
Equivalent Incandescent	25W	40W	50W	25W	40W	50W
Voltage	220-240VAC or 110-130VAC		220-240VAC or 110-130VAC		220-240VAC or 110-130VAC	
Power Factor	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50
Energy Efficiency Class	A++	A++	A++	A++	A++	A++
Life Time	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h
Beam Angle	360°	360°	360°	360°	360°	360°
Lamp Base	E12, E14	E12, E14	E12, E14	E12, E14, E26, E27, B22		
Temp. of Operation	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C
Dimensions	E12: Ø32x98mm E14: Ø32x99mm		E14: Ø35x99mm E27: Ø35x94mm			
Color Temperature	2700K 6500K		2700K 6500K			

CE RoHS ErP



Tailed Candle CA32/CA35



Model No.	37252	37255	37256	37232	37235	37236
Bulb Type	CA32	CA32	CA32	CA35	CA35	CA35
Wattage	2W	4W	5.5W	2W	4W	5.5W
LED Filament Spec.	2x38	4x38	6x38	2x38	4x38	6x38
Luminous Flux	220lm±10%	450lm±10%	550lm±10%	220lm±10%	450lm±10%	550lm±10%
Equivalent Incandescent	25W	40W	50W	25W	40W	50W
Voltage	220-240VAC or 110-130VAC		220-240VAC or 110-130VAC		220-240VAC or 110-130VAC	
Power Factor	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50
Energy Efficiency Class	A++	A++	A++	A++	A++	A++
Life Time	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h
Beam Angle	360°	360°	360°	360°	360°	360°
Lamp Base	E12, E14	E12, E14	E12, E14	E12, E14, E26, E27, B22		
Temp. of Operation	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C
Dimensions	E12: Ø32x121mm E14: Ø32x122mm		E14: Ø35x122mm E27: Ø35x117mm			
Color Temperature	2700K 6500K		2700K 6500K			

CE RoHS ErP

D
LED Filament
Bulbs



**Golf Ball
G45/P45**



Model No.	37312	37315	37316
Wattage	2W	4W	5.5W
LED Filament Spec.	2x38	4x38	6x38
Luminous Flux	220lm±10%	450lm±10%	550lm±10%
Equivalent Incandescent	25W	40W	50W
Voltage	220~240VAC or 110~130VAC		
Power Factor	> 0.50	> 0.50	> 0.50
Energy Efficiency Class	A++	A++	A++
Life Time	25,000h	25,000h	25,000h
Beam Angle	360°	360°	360°
Lamp Base	E12, E14, E26, E27, B22		
Temp. of Operation	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C
Dimensions	E14: Ø45x77mm E27: Ø45x72mm		
Color Temperature			

CE RoHS ErP



**Classic
ST58/ST64**



Model No.	37701	37703	37705	37711	37713	37715
Bulb Type	ST58	ST58	ST58	ST64	ST64	ST64
Wattage	4W	7W	8W	4W	7W	8W
LED Filament Spec.	4x38	4x50	6x38	4x38	4x50	6x38
Luminous Flux	470lm±10%	806lm±10%	1055lm±10%	470lm±10%	806lm±10%	1055lm±10%
Equivalent Incandescent	40W	60W	75W	40W	60W	75W
Voltage	220~240VAC or 110~130VAC			220~240VAC or 110~130VAC		
Power Factor	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50
Energy Efficiency Class	A++	A++	A++	A++	A++	A++
Life Time	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h
Beam Angle	360°	360°	360°	360°	360°	360°
Lamp Base	E26, E27, B22	E26, E27, B22	E26, E27, B22	E26, E27, B22	E26, E27, B22	E26, E27, B22
Temp. of Operation	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C
Dimensions	Ø58x130mm	Ø58x130mm	Ø58x130mm	Ø64x140mm	Ø64x140mm	Ø64x140mm
Color Temperature						

CE RoHS ErP



LED Filament
Bulbs



**Classic
S14/ST45**



Model No.	37781	37782	37785	37786
Bulb Type	Glass	PC	Glass	PC
Wattage	0.7W	0.7W	1.5W	1.5W
LED Filament Spec.	1x38	1x38	2x38	2x38
Luminous Flux	40lm±10%	40lm±10%	70lm±10%	70lm±10%
Equivalent Incandescent	5W	5W	10W	10W
Voltage	220-240VAC or 110-130VAC			
Power Factor	> 0.50	> 0.50	> 0.50	> 0.50
Energy Efficiency Class	A+	A+	A+	A+
Life Time	25,000h	25,000h	25,000h	25,000h
Beam Angle	360°	360°	360°	360°
Lamp Base	E26, E27, B22	E26, E27, B22	E26, E27, B22	E26, E27, B22
Temp. of Operation	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C
Dimensions	Ø45x85mm	Ø45x85mm	Ø45x85mm	Ø45x85mm
Color Temperature				

CE RoHS ErP



**Globe
G80/G95/G125**



Model No.	37501	37503	37505	37511	37513	37515	37521	37523	37525
Bulb Type	G80	G80	G80	G95	G95	G95	G125	G125	G125
Wattage	4W	7W	8W	4W	7W	8W	4W	7W	8W
LED Filament Spec.	4x38	4x50	6x38	4x38	4x50	6x38	4x38	4x50	6x38
Luminous Flux	470lm±10%	806lm±10%	1055lm±10%	470lm±10%	806lm±10%	1055lm±10%	470lm±10%	806lm±10%	1055lm±10%
Equivalent Incandescent	40W	60W	75W	40W	60W	75W	40W	60W	75W
Voltage	220-240VAC or 110-130VAC			220-240VAC or 110-130VAC			220-240VAC or 110-130VAC		
Power Factor	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50
Energy Efficiency Class	A++	A++	A++	A++	A++	A++	A++	A++	A++
Life Time	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h
Beam Angle	360°	360°	360°	360°	360°	360°	360°	360°	360°
Lamp Base	E26, E27, B22	E26, E27, B22	E26, E27, B22	E26, E27, B22	E26, E27, B22	E26, E27, B22	E26, E27, B22	E26, E27, B22	E26, E27, B22
Temp. of Operation	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C
Dimensions	Ø80x120mm	Ø90x120mm	Ø80x120mm	Ø95x140mm	Ø95x140mm	Ø95x140mm	Ø125x175mm	Ø125x175mm	Ø125x175mm
Color Temperature									

CE RoHS ErP

D
LED Filament
Bulbs



**Indicator
C7/ST26/T25**



Model No.	37291	37751	37011
Bulb Type	C7	ST26	T25
Wattage	0.5W	1.2W	2W
LED Filament Spec.	1x26	2x26	2x38
Luminous Flux	50lm±10%	110lm±10%	220lm±10%
Equivalent Incandescent	5W	10W	25W
Voltage	220~240VAC or 110~130VAC		
Power Factor	> 0.50	> 0.50	> 0.50
Energy Efficiency Class	A++	A++	A++
Life Time	25,000h	25,000h	25,000h
Beam Angle	360°	360°	360°
Lamp Base	E12, E14	E14	E14
Temp. of Operation	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C
Dimensions	Ø23x54mm	Ø26x58mm	Ø25x63mm
Color Temperature			

CE RoHS ErP



**Reflector
R50/R63/R80**



Model No.	37601	37602	37604	37605	37607	37608	37611
Bulb Type	R50	R50	R63	R63	R80	R80	R80
Wattage	2W	4W	4W	7W	4W	7W	8W
LED Filament Spec.	2x38	4x38	4x38	4x50	4x38	4x50	6x38
Luminous Flux	160lm±10%	320lm±10%	320lm±10%	560lm±10%	320lm±10%	560lm±10%	640lm±10%
Equivalent Incandescent	25W	40W	40W	60W	40W	60W	75W
Voltage	220~240VAC or 110~130VAC			220~240VAC or 110~130VAC	220~240VAC or 110~130VAC		
Power Factor	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50
Energy Efficiency Class	A++	A++	A++	A++	A++	A++	A++
Life Time	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h
Beam Angle	360°	360°	360°	360°	360°	360°	360°
Lamp Base	E12, E14	E12, E14	E26, E27, B22	E26, E27, B22	E26, E27, B22	E26, E27, B22	E26, E27, B22
Temp. of Operation	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C
Dimensions	Ø50x84mm	Ø50x84mm	Ø53x102mm	Ø53x102mm	Ø80x113mm	Ø80x113mm	Ø80x113mm
Color Temperature							

CE RoHS ErP



Full Glass LED Bulbs

INNOLITE® full glass LED bulbs are the complete solution to replace incandescent bulbs in frosted and opal for different shapes and base caps.



I N N O L I T E®



Full Glass
LED Bulbs



**GLS A19/
A60/A55**



Model No.	37392	37393	37405	37406	37408	37409	37414	37415
Bulb Type	A55	A55	A19/A60	A19/A60	A19/A60	A19/A60	A19/A60	A19/A60
Wattage	4W	4W	5W	5W	7W	7W	8W	8W
Lamp Cover	Frosted	Opal	Frosted	Opal	Frosted	Opal	Frosted	Opal
Luminous Flux	400lm±10%	370lm±10%	500lm±10%	470lm±10%	600lm±10%	570lm±10%	830lm±10%	806lm±10%
Equivalent Incandescent	35W	35W	40W	40W	50W	50W	60W	60W
Voltage	220~240VAC or 110~130VAC		220~240VAC or 110~130VAC		220~240VAC or 110~130VAC		220~240VAC or 110~130VAC	
Power Factor	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50
Energy Efficiency Class	A+	A+	A+	A+	A+	A+	A+	A+
Life Time	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h
Beam Angle	360°	360°	360°	360°	360°	360°	360°	360°
Lamp Base	E26, E27, B22	E26, E27, B22	E26, E27, B22	E26, E27, B22	E26, E27, B22	E26, E27, B22	E26, E27, B22	E26, E27, B22
Temp. of Operation	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C
Dimensions	Ø55x94mm	Ø55x94mm	Ø60x106mm	Ø60x106mm	Ø60x106mm	Ø60x106mm	Ø60x106mm	Ø60x106mm
Color Temperature	2700K 6500K		2700K 6500K		2700K 6500K		2700K 6500K	


CE RoHS ErP

**Golf Ball
G45/P45**



Model No.	37302	37303	37304	37305
Wattage	3W	3W	4W	4W
Lamp Cover	Frosted	Opal	Frosted	Opal
Luminous Flux	270lm±10%	250lm±10%	400lm±10%	380lm±10%
Equivalent Incandescent	25W	25W	35W	35W
Voltage	220~240VAC or 110~130VAC		220~240VAC or 110~130VAC	
Power Factor	> 0.50	> 0.50	> 0.50	> 0.50
Energy Efficiency Class	A+	A+	A+	A+
Life Time	25,000h	25,000h	25,000h	25,000h
Beam Angle	360°	360°	360°	360°
Lamp Base	E12, E14, E26, E27, B22	E12, E14, E26, E27, B22	E12, E14, E26, E27, B22	E12, E14, E26, E27, B22
Temp. of Operation	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C
Dimensions	E14: Ø45x73mm E27: Ø45x67mm	E14: Ø45x73mm E27: Ø45x67mm	E14: Ø45x73mm E27: Ø45x67mm	E14: Ø45x73mm E27: Ø45x67mm
Color Temperature	2700K 6500K		2700K 6500K	

CE RoHS ErP

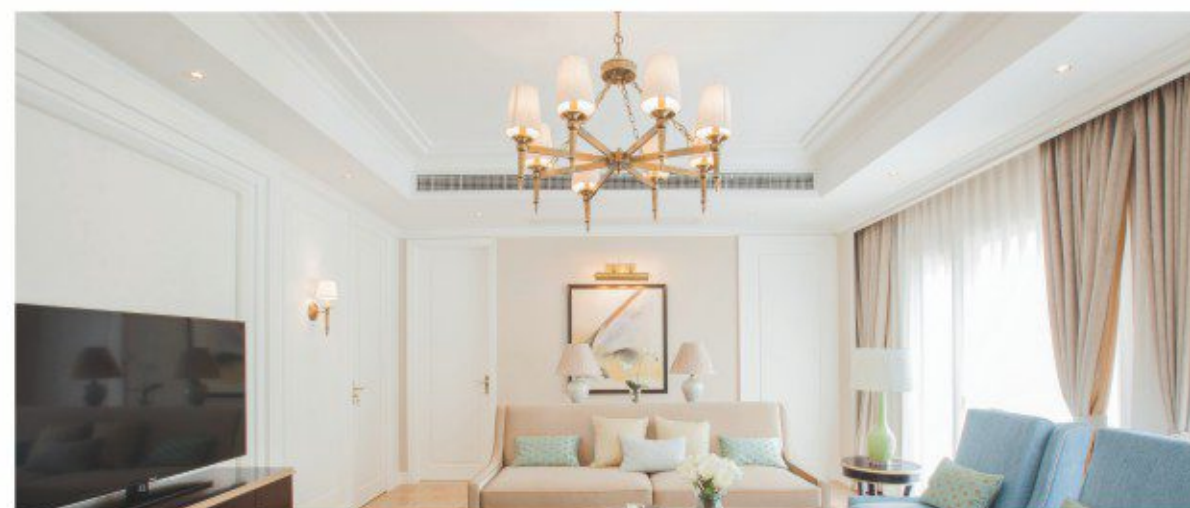



Full Glass
LED Bulbs



Model No.	37202	37203	37204	37205
Wattage	3W	3W	4W	4W
Lamp Cover	Frosted	Opal	Frosted	Opal
Luminous Flux	270lm±10%	250lm±10%	400lm±10%	380lm±10%
Equivalent Incandescent	25W	25W	35W	35W
Voltage	220~240VAC or 110~130VAC		220~240VAC or 110~130VAC	
Power Factor	> 0.50	> 0.50	> 0.50	> 0.50
Energy Efficiency Class	A+	A+	A+	A+
Life Time	25,000h	25,000h	25,000h	25,000h
Beam Angle	360°	360°	360°	360°
Lamp Base	E12, E14, E26, E27, B22		E12, E14, E26, E27, B22	
Temp. of Operation	-20°C~+40°C		-20°C~+40°C	
Dimensions	E14: Ø35x99mm E27: Ø35x96mm		E14: Ø35x99mm E27: Ø35x96mm	
Color Temperature	2700K 6500K			

CE RoHS ErP

**Candle
C35**

**Tailed
Candle
CA35**



Model No.	37222	37223	37224	37225
Wattage	3W	3W	4W	4W
Lamp Cover	Frosted	Opal	Frosted	Opal
Luminous Flux	270lm±10%	250lm±10%	400lm±10%	380lm±10%
Equivalent Incandescent	25W	25W	35W	35W
Voltage	220~240VAC or 110~130VAC		220~240VAC or 110~130VAC	
Power Factor	> 0.50	> 0.50	> 0.50	> 0.50
Energy Efficiency Class	A+	A+	A+	A+
Life Time	25,000h	25,000h	25,000h	25,000h
Beam Angle	360°	360°	360°	360°
Lamp Base	E12, E14, E26, E27, B22		E12, E14, E26, E27, B22	
Temp. of Operation	-20°C~+40°C		-20°C~+40°C	
Dimensions	E14: Ø35x122mm E27: Ø35x119mm		E14: Ø35x122mm E27: Ø35x119mm	
Color Temperature				

CE RoHS ErP



F

Conventional PCA LED Bulbs

With Plastic Clad Aluminum (PCA) housing, INNOLITE® conventional PCA LED Bulbs are the economical replacement for CFL and incandescent bulbs in various shapes, and offer a wide range of retrofit lamps.



I N N O L I T E



Conventional PCA LED Bulbs

**GLS
A19/A60/
A70/A80**



Model No.	37442	37446	37450	37452	37454	37456
Bulb Type	A60	A60	A60	A70	A80	A80
Wattage	6W	9W	12W	15W	18W	20W
Lamp Cover	Opal	Opal	Opal	Opal	Opal	Opal
Luminous Flux	470lm±10%	806lm±10%	1055lm±10%	1200lm±10%	1521lm±10%	1700lm±10%
Equivalent Incandescent	40W	60W	75W	85W	100W	130W
Voltage	220-240VAC or 110-130VAC	220-240VAC or 110-130VAC	220-240VAC or 110-130VAC	220-240VAC or 110-130VAC	220-240VAC or 110-130VAC	220-240VAC or 110-130VAC
Power Factor	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50
Energy Efficiency Class	A+	A+	A+	A+	A+	A+
Life Time	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h
Beam Angle	220°	220°	200°	200°	200°	200°
Lamp Base	E26, E27, B22	E26, E27, B22	E26, E27, B22	E26, E27, B22	E26, E27, B22	E26, E27, B22
Temp. of Operation	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C
Dimensions	Ø60x110mm	Ø60x110mm	Ø60x120mm	Ø70x130mm	Ø80x152mm	Ø80x152mm
Color Temperature	2700K 6500K		2700K 6500K		2700K 6500K	

CE RoHS ErP SAA FC



**Golf Ball
G45/P45**



Model No.	37331	37333	37334	37335
Wattage	3W	5W	6W	7W
Lamp Cover	Opal	Opal	Opal	Opal
Luminous Flux	250lm±10%	400lm±10%	480lm±10%	560lm±10%
Equivalent Incandescent	25W	35W	40W	45W
Voltage	220-240VAC or 110-130VAC	220-240VAC or 110-130VAC	220-240VAC or 110-130VAC	220-240VAC or 110-130VAC
Power Factor	> 0.50	> 0.50	> 0.50	> 0.50
Energy Efficiency Class	A+	A+	A+	A+
Life Time	25,000h	25,000h	25,000h	25,000h
Beam Angle	200°	200°	200°	200°
Lamp Base	E12, E14, E26, E27, B22	E12, E14, E26, E27, B22	E12, E14, E26, E27, B22	E12, E14, E26, E27, B22
Temp. of Operation	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C
Dimensions	E14: Ø45x90mm E27: Ø45x85mm	E14: Ø45x90mm E27: Ø45x85mm	E14: Ø45x90mm E27: Ø45x85mm	E14: Ø45x90mm E27: Ø45x85mm
Color Temperature	2700K 6500K		2700K 6500K	

CE RoHS ErP SAA FC



F

Conventional PCA
LED Bulbs



**Candle
C37**



Model No.	37151	37153	37154	37155
Wattage	3W	5W	6W	7W
Lamp Cover	Opal	Opal	Opal	Opal
Luminous Flux	250lm±10%	400lm±10%	480lm±10%	560lm±10%
Equivalent Incandescent	25W	35W	40W	45W
Voltage	220-240VAC or 110-130VAC		220-240VAC or 110-130VAC	
Power Factor	> 0.50	> 0.50	> 0.50	> 0.50
Energy Efficiency Class	A+	A+	A+	A+
Life Time	25,000h	25,000h	25,000h	25,000h
Beam Angle	200°	200°	200°	200°
Lamp Base	E12, E14, E26, E27, B22		E12, E14, E26, E27, B22	
Temp. of Operation	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C
Dimensions	E14: Ø37x103mm E27: Ø37x105mm		E14: Ø37x103mm E27: Ø37x105mm	
Color Temperature	2700K 6500K		2700K 6500K	

CE RoHS ErP



**Tailed
Candle
CA37**



Model No.	37171	37173	37174	37175
Wattage	3W	5W	6W	7W
Lamp Cover	Opal	Opal	Opal	Opal
Luminous Flux	250lm±10%	400lm±10%	480lm±10%	560lm±10%
Equivalent Incandescent	25W	35W	40W	45W
Voltage	220-240VAC or 110-130VAC		220-240VAC or 110-130VAC	
Power Factor	> 0.50	> 0.50	> 0.50	> 0.50
Energy Efficiency Class	A+	A+	A+	A+
Life Time	25,000h	25,000h	25,000h	25,000h
Beam Angle	200°	200°	200°	200°
Lamp Base	E12, E14, E26, E27, B22		E12, E14, E26, E27, B22	
Temp. of Operation	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C
Dimensions	E14: Ø37x128mm E27: Ø37x130mm		E14: Ø37x128mm E27: Ø37x130mm	
Color Temperature	2700K 6500K		2700K 6500K	

CE RoHS ErP



Conventional PCA
LED Bulbs

**Reflector
R39/R50/
R63/R80**



**Globe G80/
G95/G120**



Model No.	37621	37622	37631	37632	37633	37641	37642	37643	37651	37652
Bulb Type	R39	R39	R50	R50	R50	R63	R63	R63	R80	R80
Wattage	3W	4W	5W	6W	7W	7W	8W	9W	10W	12W
Lamp Cover	Opal	Opal	Opal	Opal	Opal	Opal	Opal	Opal	Opal	Opal
Luminous Flux	210lm±10%	280lm±10%	350lm±10%	430lm±10%	500lm±10%	520lm±10%	600lm±10%	680lm±10%	750lm±10%	900lm±10%
Equivalent Incandescent	30W	35W	40W	50W	60W	60W	75W	85W	90W	100W
Voltage	220-240VAC or 110-130VAC	220-240VAC or 110-130VAC	220-240VAC or 110-130VAC	220-240VAC or 110-130VAC	220-240VAC or 110-130VAC	220-240VAC or 110-130VAC	220-240VAC or 110-130VAC	220-240VAC or 110-130VAC	220-240VAC or 110-130VAC	220-240VAC or 110-130VAC
Power Factor	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50
Energy Efficiency Class	A+	A+	A+	A+	A+	A+	A+	A+	A+	A+
Life Time	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h
Beam Angle	120°	120°	120°	120°	120°	120°	120°	120°	120°	120°
Lamp Base	E12, E14	E12, E14	E12, E14	E12, E14	E12, E14	E26, E27, B22	E26, E27, B22	E26, E27, B22	E26, E27, B22	E26, E27, B22
Temp. of Operation	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C
Dimensions	Ø39x67mm	Ø39x67mm	Ø50x89mm	Ø50x89mm	Ø50x89mm	Ø63x103mm	Ø63x103mm	Ø63x103mm	Ø80x115mm	Ø80x115mm
Color Temperature	2700K 6500K		2700K 6500K		2700K 6500K		2700K 6500K		2700K 6500K	

CE RoHS ErP



Model No.	37561	37562	37563
Bulb Type	G80	G95	G120
Wattage	12W	15W	18W
Lamp Cover	Opal	Opal	Opal
Luminous Flux	1055lm±10%	1200lm±10%	1521lm±10%
Equivalent Incandescent	75W	85W	100W
Voltage	220-240VAC or 110-130VAC	220-240VAC or 110-130VAC	220-240VAC or 110-130VAC
Power Factor	> 0.50	> 0.50	> 0.50
Energy Efficiency Class	A+	A+	A+
Life Time	25,000h	25,000h	25,000h
Beam Angle	270°	270°	270°
Lamp Base	E26, E27, B22	E26, E27, B22	E26, E27, B22
Temp. of Operation	-20~+40°C	-20~+40°C	-20~+40°C
Dimensions	Ø80x121mm	Ø95x138mm	Ø120x157mm
Color Temperature	2700K 6500K		2700K 6500K

CE RoHS ErP

F

Conventional PCA
LED Bulbs

T Bulb



Model No.	37061	37062	37063	37064	37065	37066
Bulb Type	T60	T70	T80	T100	T120	T140
Wattage	12W	15W	20W	25W	35W	45W
Lamp Cover	Opal	Opal	Opal	Opal	Opal	Opal
Luminous Flux	900lm±10%	1100lm±10%	1500lm±10%	1800lm±10%	2600lm±10%	3400lm±10%
Equivalent Incandescent	60W	75W	100W	120W	150W	200W
Voltage	220-240VAC or 110-130VAC		220-240VAC or 110-130VAC		220-240VAC or 110-130VAC	
Power Factor	> 0.50		> 0.50		> 0.50	
Energy Efficiency Class	A+		A+		A+	
Life Time	25,000h		25,000h		25,000h	
Beam Angle	200°		200°		200°	
Lamp Base	E26, E27, B22		E26, E27, B22		E26, E27, B22	
Temp. of Operation	-20°C~+40°C		-20°C~+40°C		-20°C~+40°C	
Dimensions	Ø60x118mm	Ø70x129mm	Ø80x149mm	Ø100x179mm	Ø120x209mm	Ø140x232mm
Color Temperature	2700K 6500K		2700K 6500K		2700K 6500K	

CE RoHS



UFO Bulb



Model No.	36102	36103	36104	36105	36106	36108
Wattage	12W	15W	18W	20W	24W	36W
Lamp Cover	Opal	Opal	Opal	Opal	Opal	Opal
Luminous Flux	850lm±10%	1100lm±10%	1250lm±10%	1500lm±10%	1700lm±10%	2500lm±10%
Equivalent Incandescent	60W	75W	85W	100W	120W	150W
Voltage	220-240VAC or 110-130VAC			220-240VAC or 110-130VAC		
Power Factor	> 0.50			> 0.50		
Energy Efficiency Class	A+			A+		
Life Time	25,000h			25,000h		
Beam Angle	180°			180°		
Lamp Base	E26, E27, B22			E26, E27, B22		
Temp. of Operation	-20°C~+40°C			-20°C~+40°C		
Dimensions	Ø105x75mm	Ø150x75mm	Ø150x75mm	Ø230x75mm	Ø230x75mm	Ø300x75mm
Color Temperature	2700K 6500K			2700K 6500K		


CE RoHS

G

G9 / G4 / R7S LED Light Bulbs

Expand your LED experience by applying INNOLITE® G9, G4 and R7S LED bulbs to decorative luminaires, chandeliers, floor lights and floodlights, you will experience a crystalline, cozy and diffused luminous effect with great energy saving.

I N N O L I T E®

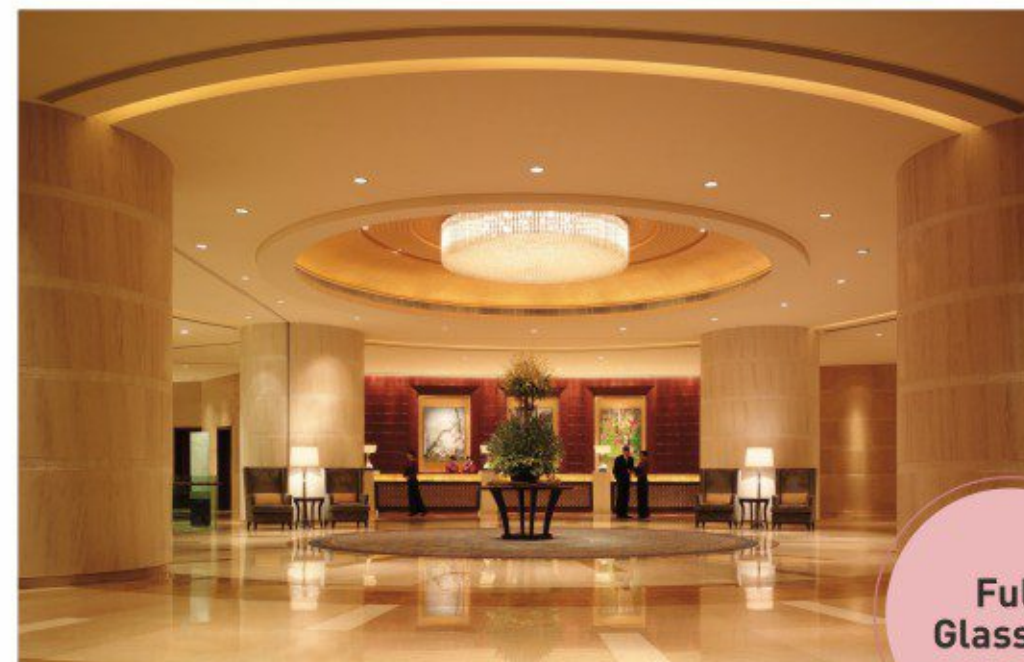

Full
Glass G9



Model No.	37932
Wattage	2W
Lamp Cover	Clear
Luminous Flux	200lm±10%
Equivalent Incandescent	20W
Voltage	220~240VAC or 110~130VAC
Power Factor	>0.50
Energy Efficiency Class	A++
Life Time	25,000h
Beam Angle	360°
Lamp Base	G9
Temp. of Operation	-20°C~+40°C
Dimensions	Ø14x50mm
Color Temperature	2700K 6500K

CE RoHS ErP FC

INNOLITE®
 GREEN LIGHTING SOLUTION

G
 G9 / G4 / R7S
 LED Light Bulbs

PCA G9



Model No.	37913	37914	37915	37916
Wattage	3W	3W	4W	4W
Lamp Cover	Clear	Frosted	Clear	Frosted
Luminous Flux	300lm±10%	280lm±10%	400lm±10%	380lm±10%
Equivalent Incandescent	30W	30W	40W	40W
Voltage	220~240VAC or 110~130VAC		220~240VAC or 110~130VAC	
Power Factor	> 0.50	> 0.50	> 0.50	> 0.50
Energy Efficiency Class	A+	A+	A+	A+
Life Time	25,000h	25,000h	25,000h	25,000h
Beam Angle	270°	270°	270°	270°
Lamp Base	G9	G9	G9	G9
Temp. of Operation	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C
Dimensions	Ø17x52mm	Ø17x52mm	Ø17x52mm	Ø17x52mm
Color Temperature				

CE RoHS ErP



PCA G9



Model No.	37921	37922	37925	37926
Wattage	2.5W	2.5W	3.5W	3.5W
Lamp Cover	Clear	Frosted	Clear	Frosted
Luminous Flux	220lm±10%	200lm±10%	320lm±10%	300lm±10%
Equivalent Incandescent	25W	25W	30W	30W
Voltage	220~240VAC or 110~130VAC		220~240VAC or 110~130VAC	
Power Factor	> 0.50	> 0.50	> 0.50	> 0.50
Energy Efficiency Class	A+	A+	A+	A+
Life Time	25,000h	25,000h	25,000h	25,000h
Beam Angle	270°	270°	270°	270°
Lamp Base	G9	G9	G9	G9
Temp. of Operation	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C
Dimensions	Ø12x16x48mm	Ø12x16x48mm	Ø12x16x80mm	Ø12x16x80mm
Color Temperature				

CE RoHS ErP

G
 G9 / G4 / R7S
 LED Light Bulbs



Model No.	37981	37982	37986	37987
Wattage	1.5W	1.5W	2W	2W
Lamp Cover	Clear	Frosted	Clear	Frosted
Luminous Flux	140lm±10%	120lm±10%	180lm±10%	160lm±10%
Equivalent Incandescent	10W	10W	15W	15W
Voltage	12V AC/DC	12V AC/DC	220-240VAC or 110-130VAC	220-240VAC or 110-130VAC
Power Factor	> 0.50	> 0.50	> 0.50	> 0.50
Energy Efficiency Class	A+	A+	A+	A+
Life Time	25,000h	25,000h	25,000h	25,000h
Beam Angle	270°	270°	270°	270°
Lamp Base	G4	G4	G4	G4
Temp. of Operation	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C
Dimensions	Ø12x14x43mm	Ø12x14x43mm	Ø12x14x43mm	Ø12x14x43mm
Color Temperature				

CE RoHS ErP

PCA G4



PCA R7S



Model No.	36911	36912	36913	36914
Wattage	6W	10W	12W	15W
Lamp Cover	Clear	Clear	Clear	Clear
Luminous Flux	500lm±10%	800lm±10%	1100lm±10%	1400lm±10%
Equivalent Incandescent	45W	60W	75W	100W
Voltage	220-240VAC or 110-130VAC	220-240VAC or 110-130VAC	220-240VAC or 110-130VAC	220-240VAC or 110-130VAC
Power Factor	> 0.50	> 0.50	> 0.50	> 0.50
Energy Efficiency Class	A+	A+	A+	A+
Life Time	25,000h	25,000h	25,000h	25,000h
Beam Angle	270°	270°	270°	270°
Lamp Base	R7S	R7S	R7S	R7S
Temp. of Operation	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C
Dimensions	Ø23x78mm	Ø23x118mm	Ø23x135mm	Ø23x189mm
Color Temperature				

CE RoHS ErP

INNOLITE®
GREEN LIGHTING SOLUTION

[H] GU10 / MR16 LED Spotlights

With more than 80% energy saving, 15 times longer life span and our complete LED solution for full range of halogen GU10 / MR16 reflector lamps, especially our INNOLITE® "Crystal" items with glass housing bring back the familiar "halogen" feeling in LED.



I N

N O

INNOLITE
GREEN LIGHTING SOLUTION

H
GU10 / MR16
LED Spotlights

**Full Glass
GU10 COB**



**Glass
GU10 COB**



Model No.	36287	36288
Wattage	5W	7W
LED Type	COB	COB
Luminous Flux	520lm±10%	600lm±10%
Equivalent Incandescent	60W	75W
Voltage	220-240VAC or 110-130VAC	220-240VAC or 110-130VAC
Power Factor	> 0.50	> 0.50
Energy Efficiency Class	A+	A+
Life Time	25,000h	25,000h
Beam Angle	38°/60°	38°/60°
Lamp Base	GU10	GU10
Temp. of Operation	-20°C~+40°C	-20°C~+40°C
Dimensions	Ø50x53mm	Ø50x53mm
Color Temperature	2700K	6500K



CE RoHS ErP



Model No.	36281	36282	36283	36284	36285	36286
Bulb Type	DR (Dichroic)	DR (Dichroic)	AE (Aluminizing Eco)	AE (Aluminizing Eco)	AL (Aluminizing)	AL (Aluminizing)
Wattage	3W	5W	3W	5W	3W	5W
LED Type	COB	COB	COB	COB	COB	COB
Luminous Flux	220lm±10%	380lm±10%	240lm±10%	400lm±10%	260lm±10%	450lm±10%
Equivalent Incandescent	25W	40W	30W	45W	30W	50W
Voltage	220-240VAC or 110-130VAC	220-240VAC or 110-130VAC	220-240VAC or 110-130VAC	220-240VAC or 110-130VAC	220-240VAC or 110-130VAC	220-240VAC or 110-130VAC
Power Factor	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50
Energy Efficiency Class	A+	A+	A+	A+	A+	A+
Life Time	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h
Beam Angle	38°/60°	38°/60°	38°	38°	38°/60°	38°/60°
Lamp Base	GU10	GU10	GU10	GU10	GU10	GU10
Temp. of Operation	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C
Dimensions	Ø50x53mm	Ø50x53mm	Ø50x53mm	Ø50x53mm	Ø50x53mm	Ø50x53mm
Color Temperature	2700K	6500K	2700K	6500K	2700K	6500K

CE RoHS ErP

INNOLITE
GREEN LIGHTING SOLUTION



GU10 / MR16
LED Spotlights

Full Glass
MR16 COB



Glass GU10
SMD



Model No.	36289	36290	36291	36292	36293	36294	36295
Wattage	3W	5W	6W	3W	5W	6W	7W
LED Type	COB	COB	COB	COB	COB	COB	COB
Luminous Flux	230lm±10%	380lm±10%	450lm±10%	260lm±10%	450lm±10%	520lm±10%	600lm±10%
Equivalent Incandescent	20W	35W	40W	30W	50W	60W	75W
Voltage	12V AC/DC	12V AC/DC	12V AC/DC	220~240VAC	220~240VAC	220~240VAC	220~240VAC
Power Factor	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50
Energy Efficiency Class	A+	A+	A+	A+	A+	A+	A+
Life Time	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h
Beam Angle	38°/60°	38°/60°	38°/60°	38°/60°	38°/60°	38°/60°	38°/60°
Lamp Base	GU5.3	GU5.3	GU5.3	GU5.3	GU5.3	GU5.3	GU5.3
Temp. of Operation	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C
Dimensions	Ø50x45mm	Ø50x45mm	Ø50x45mm	Ø50x53mm	Ø50x53mm	Ø50x53mm	Ø50x53mm
Color Temperature	2700K 6500K		2700K 6500K		2700K 6500K		2700K 6500K

CE RoHS ErP



Model No.	36201	36202	36203	36204	36205	36206
Bulb Type	Clear	Prismatic	Opal	Clear	Prismatic	Opal
Wattage	3W	3W	3W	5W	5W	5W
LED Type	SMD	SMD	SMD	SMD	SMD	SMD
Luminous Flux	240lm±10%	240lm±10%	230lm±10%	400lm±10%	400lm±10%	380lm±10%
Equivalent Incandescent	30W	30W	30W	45W	45W	45W
Voltage	220~240VAC or 110~130VAC	220~240VAC or 110~130VAC	220~240VAC or 110~130VAC	220~240VAC or 110~130VAC	220~240VAC or 110~130VAC	220~240VAC or 110~130VAC
Power Factor	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50
Energy Efficiency Class	A+	A+	A+	A+	A+	A+
Life Time	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h
Beam Angle	110°	110°	110°	110°	110°	110°
Lamp Base	GU10	GU10	GU10	GU10	GU10	GU10
Temp. of Operation	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C
Dimensions	Ø50x56mm	Ø50x56mm	Ø50x56mm	Ø50x56mm	Ø50x56mm	Ø50x56mm
Color Temperature	2700K 6500K		2700K 6500K		2700K 6500K	

CE RoHS ErP

INNOLITE®
GREEN LIGHTING SOLUTION

H
GU10 / MR16
LED Spotlights

**PCA GU10
COB**



**PCA MR16
COB**



Model No.	36351	36352	36353	36354
Wattage	3W	5W	6W	7W
LED Type	COB	COB	COB	COB
Luminous Flux	250lm±10%	420lm±10%	480lm±10%	550lm±10%
Equivalent Incandescent	30W	45W	50W	60W
Voltage	220~240VAC or 110~130VAC	220~240VAC or 110~130VAC	220~240VAC or 110~130VAC	220~240VAC or 110~130VAC
Power Factor	> 0.50	> 0.50	> 0.50	> 0.50
Energy Efficiency Class	A+	A+	A+	A+
Life Time	25,000h	25,000h	25,000h	25,000h
Beam Angle	38°	38°	38°	38°
Lamp Base	GU10	GU10	GU10	GU10
Temp. of Operation	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C
Dimensions	Ø50x54mm	Ø50x54mm	Ø50x54mm	Ø50x54mm
Color Temperature	2700K	6500K		

CE RoHS ErP



Model No.	36355	36356	36357	36358	36359	36360	36361
Wattage	3W	5W	6W	3W	5W	6W	7W
LED Type	COB	COB	COB	COB	COB	COB	COB
Luminous Flux	230lm±10%	380lm±10%	450lm±10%	250lm±10%	420lm±10%	480lm±10%	550lm±10%
Equivalent Incandescent	20W	35W	40W	30W	45W	50W	60W
Voltage	12V AC/DC	12V AC/DC	12V AC/DC	220~240VAC or 110~130VAC	220~240VAC or 110~130VAC	220~240VAC or 110~130VAC	220~240VAC or 110~130VAC
Power Factor	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50
Energy Efficiency Class	A+	A+	A+	A+	A+	A+	A+
Life Time	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h
Beam Angle	38°	38°	38°	38°	38°	38°	38°
Lamp Base	GU5.3	GU5.3	GU5.3	GU5.3	GU5.3	GU5.3	GU5.3
Temp. of Operation	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C
Dimensions	Ø50x49mm	Ø50x49mm	Ø50x49mm	Ø50x54mm	Ø50x54mm	Ø50x54mm	Ø50x54mm
Color Temperature	2700K	6500K		2700K	6500K		

CE RoHS ErP

PCA GU10
SMDPCA MR16
SMD

Model No.	36321	36322	36323	36324	36325
Wattage	3W	5W	6W	7W	8W
LED Type	SMD	SMD	SMD	SMD	SMD
Luminous Flux	240lm±10%	400lm±10%	480lm±10%	550lm±10%	600lm±10%
Equivalent Incandescent	30W	45W	50W	60W	75W
Voltage	220~240VAC or 110~130VAC		220~240VAC or 110~130VAC		
Power Factor	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50
Energy Efficiency Class	A+	A+	A+	A+	A+
Life Time	25,000h	25,000h	25,000h	25,000h	25,000h
Beam Angle	110°	110°	110°	110°	110°
Lamp Base	GU10	GU10	GU10	GU10	GU10
Temp. of Operation	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C
Dimensions	Ø50x56mm	Ø50x56mm	Ø50x56mm	Ø50x56mm	Ø50x56mm
Color Temperature					

CE RoHS ErP



Model No.	36326	36327	36328	36329	36330	36331	36332	36333
Wattage	3W	5W	6W	3W	5W	6W	7W	8W
LED Type	SMD	SMD	SMD	SMD	SMD	SMD	SMD	SMD
Luminous Flux	230lm±10%	380lm±10%	450lm±10%	260lm±10%	420lm±10%	480lm±10%	550lm±10%	600lm±10%
Equivalent Incandescent	20W	35W	40W	30W	45W	50W	60W	75W
Voltage	12V AC/DC	12V AC/DC	12V AC/DC	220~240VAC or 110~130VAC	220~240VAC or 110~130VAC	220~240VAC or 110~130VAC	220~240VAC or 110~130VAC	220~240VAC or 110~130VAC
Power Factor	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50
Energy Efficiency Class	A+	A+	A+	A+	A+	A+	A+	A+
Life Time	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h
Beam Angle	110°	110°	110°	110°	110°	110°	110°	110°
Lamp Base	GU5.3	GU5.3	GU5.3	GU5.3	GU5.3	GU5.3	GU5.3	GU5.3
Temp. of Operation	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C
Dimensions	Ø50x52mm	Ø50x52mm	Ø50x52mm	Ø50x56mm	Ø50x56mm	Ø50x56mm	Ø50x56mm	Ø50x56mm
Color Temperature								

CE RoHS ErP



LED Tube Lights

With more than 50% energy saving, five times longer life span, full glass or PCA housing, INNOLITE® LED tubes are the perfect replacement for all traditional T8 / T5 fluorescent tubes in various length, that offer a wide range of retrofit luminaires.



I N N O L I T E®



Model No.	31111	31112	31113	31114
Wattage	9W	15W	18W	23W
Tube Color	Opal	Opal	Opal	Opal
Luminous Flux	800lm±10%	1200lm±10%	1600lm±10%	2200lm±10%
Equivalent Fluorescent Tube	18W	30W	36W	58W
Voltage	220~240VAC or 85~265VAC			
Power Factor	> 0.50	> 0.50	> 0.50	> 0.50
Energy Efficiency Class	A+	A+	A+	A+
Life Time	25,000h	25,000h	25,000h	25,000h
Beam Angle	330°	330°	330°	330°
Lamp Base	G13	G13	G13	G13
Temp. of Operation	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C
Dimensions	Ø26x600mm	Ø26x900mm	Ø26x1200mm	Ø26x1500mm
Color Temperature	2700K 6500K			

**GLASS
Tube T8**

CE RoHS





LED Tube Lights



Model No.	31121	31122	31123	31124
Wattage	9W	15W	18W	23W
Tube Color	Opal	Opal	Opal	Opal
Luminous Flux	800lm±10%	1200lm±10%	1600lm±10%	2200lm±10%
Equivalent Fluorescent Tube	18W	30W	36W	58W
Voltage	220~240VAC or 85~265VAC			
Power Factor	> 0.50	> 0.50	> 0.50	> 0.50
Energy Efficiency Class	A+	A+	A+	A+
Life Time	25,000h	25,000h	25,000h	25,000h
Beam Angle	330°	330°	330°	330°
Lamp Base	G13	G13	G13	G13
Temp. of Operation	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C
Dimensions	Ø26x600mm	Ø26x900mm	Ø26x1200mm	Ø26x1500mm
Color Temperature				

PCA Tube T8

CE RoHS



PWA Tube T8



Model No.	31131	31132	31133	31134	31135	31136
Wattage	9W	15W	18W	22W	23W	55W
Tube Color	Opal	Opal	Opal	Opal	Opal	Opal
Luminous Flux	800lm±10%	1200lm±10%	1600lm±10%	2000lm±10%	2200lm±10%	4800lm±10%
Equivalent Fluorescent Tube	18W	30W	36W	48W	58W	100W
Voltage	220~240VAC or 85~265VAC			220~240VAC or 85~265VAC		
Power Factor	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50
Energy Efficiency Class	A+	A+	A+	A+	A+	A+
Life Time	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h
Beam Angle	270°	270°	270°	270°	270°	270°
Lamp Base	G13	G13	G13	G13	G13	G13
Temp. of Operation	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C
Dimensions	Ø26x600mm	Ø26x900mm	Ø26x1200mm	Ø26x1200mm	Ø26x1500mm	Ø26x2400mm
Color Temperature						

CE RoHS





LED Tube Lights



Model No.	31171	31172	31173	31174
Wattage	8W	12W	16W	20W
Tube Color	Opal	Opal	Opal	Opal
Luminous Flux	800lm±10%	1200lm±10%	1600lm±10%	2000lm±10%
Equivalent Fluorescent Tube	14W	21W	28W	35W
Voltage	220~240VAC or 85~265VAC			
Power Factor	> 0.50	> 0.50	> 0.50	> 0.50
Energy Efficiency Class	A+	A+	A+	A+
Life Time	25,000h	25,000h	25,000h	25,000h
Beam Angle	330°	330°	330°	330°
Lamp Base	G5	G5	G5	G5
Temp. of Operation	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C
Dimensions	Ø20x550mm	Ø20x850mm	Ø20x1150mm	Ø20x1450mm
Color Temperature				

PCA Tube T6

CE RoHS



GLASS Tube T6



Model No.	31161	31162	31163	31164	31165	31166	31167	31168
Wattage	8W	8W	12W	12W	16W	16W	20W	20W
Tube Color	Clear	Opal	Clear	Opal	Clear	Opal	Clear	Opal
Luminous Flux	800lm±10%	750lm±10%	1200lm±10%	1120lm±10%	1600lm±10%	1500lm±10%	2000lm±10%	1850lm±10%
Equivalent Fluorescent Tube	14W	14W	21W	21W	28W	28W	35W	35W
Voltage	220~240VAC or 85~265VAC				220~240VAC or 85~265VAC			
Power Factor	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50
Energy Efficiency Class	A+	A+	A+	A+	A+	A+	A+	A+
Life Time	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h
Beam Angle	330°	330°	330°	330°	330°	330°	330°	330°
Lamp Base	G5	G5	G5	G5	G5	G5	G5	G5
Temp. of Operation	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C
Dimensions	Ø20x550mm	Ø20x550mm	Ø20x850mm	Ø20x850mm	Ø20x1150mm	Ø20x1150mm	Ø20x1450mm	Ø20x1450mm
Color Temperature								

CE RoHS





LED Panel Lights




J

LED Panel Lights Panel Downlights

With diffused, uniform and comfortable illumination effects, INNOLITE® LED panel lights and panel downlights are the new upgrade replacement for all traditional recessed & surface louvre luminaires, troffer and downlights in office, conference hall, school, hospital, gym, kitchen, Sanitary and balneal room, etc.

INSTALLATION: ☒ Ceiling ☒ Suspend
☒ Surface ☒ Recess

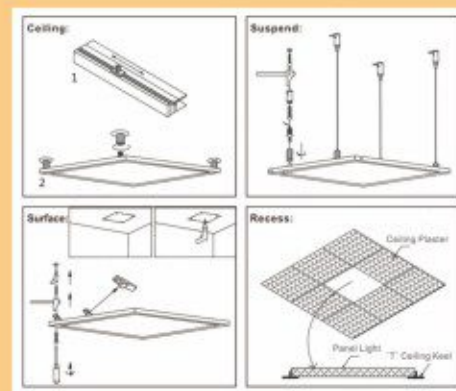

Model No.	31001	31002	31004	31005	31007	31008	31009	31010	31011	31012	31013	31015	31016	31017
Wattage	8W	12W	16W	24W	32W	36W	40W	48W	36W	40W	48W	56W	60W	72W
Luminous Efficiency	80lm/w or 100lm/w		80lm/w or 100lm/w		80lm/w or 100lm/w		80lm/w or 100lm/w		80lm/w or 100lm/w		80lm/w or 100lm/w		80lm/w or 100lm/w	
Finishing	White/Silver		White/Silver		White/Silver		White/Silver		White/Silver		White/Silver		White/Silver	
Pattern of Frame	1.Flat	2.Step	3.Step with Strips		1.Flat	2.Step	3.Step with Strips		1.Flat	2.Step	3.Step with Strips			
Mounting Option	Recessed, Surface, Ceiling, Suspend				Recessed, Surface, Ceiling, Suspend				Recessed, Surface, Ceiling, Suspend					
Voltage	175-265VAC or 85-265VAC				175-265VAC or 85-265VAC				175-265VAC or 85-265VAC					
Power Factor	> 0.50 or > 0.90		> 0.50 or > 0.90		> 0.50 or > 0.90		> 0.50 or > 0.90		> 0.50 or > 0.90		> 0.50 or > 0.90		> 0.50 or > 0.90	
Energy Efficiency Class	A+	A+	A+	A+	A+	A+	A+	A+	A+	A+	A+	A+	A+	A+
LifeTime	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h
Beam Angle	85°or120°	85°or120°	85°or120°	85°or120°	85°or120°	85°or120°	85°or120°	85°or120°	85°or120°	85°or120°	85°or120°	85°or120°	85°or120°	85°or120°
UGR	UGR<19	UGR<19	UGR<19	UGR<19	UGR<19	UGR<19	UGR<19	UGR<19	UGR<19	UGR<19	UGR<19	UGR<19	UGR<19	UGR<19
Temp. of Operation	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C
Dimensions	295x295mm		295x595mm		595x595mm		600x600mm		295x1195mm		300x1200mm		595x1195mm	
	300x300mm		300x600mm		605x605mm		620x620mm		305x1205mm		320x1220mm		605x1205mm	
					2' x 2' Feet				1' x 4' Feet				2' x 4' Feet	
Color Temperature														
	2700K		6500K		2700K		6500K		2700K		6500K		2700K	

INNOLITE
GREEN LIGHTING SOLUTION



LED Panel Lights
Panel Downlights



**Slim Round
Recessed**



**Slim Square
Recessed**



Model No.	31201	31202	31203	31204	31205	31206	31207	31208	31209
Wattage	3W	4W	6W	9W	12W	15W	18W	20W	24W
Finishing	White/Satin Nickel	White/Satin Nickel	White/Satin Nickel	White/Satin Nickel	White/Satin Nickel	White/Satin Nickel	White/Satin Nickel	White/Satin Nickel	White/Satin Nickel
Luminous Flux	200lm±10%	280lm±10%	400lm±10%	600lm±10%	800lm±10%	1000lm±10%	1200lm±10%	1300lm±10%	1600lm±10%
Mounting Option	Recessed	Recessed	Recessed	Recessed	Recessed	Recessed	Recessed	Recessed	Recessed
Voltage	175~265VAC or 85~265VAC	175~265VAC or 85~265VAC	175~265VAC or 85~265VAC	175~265VAC or 85~265VAC	175~265VAC or 85~265VAC	175~265VAC or 85~265VAC	175~265VAC or 85~265VAC	175~265VAC or 85~265VAC	175~265VAC or 85~265VAC
Power Factor	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50
Energy Efficiency Class	A+	A+	A+	A+	A+	A+	A+	A+	A+
Life Time	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h
Beam Angle	120°	120°	120°	120°	120°	120°	120°	120°	120°
Dimensions	Ø85mm	Ø105mm	Ø120mm	Ø145mm	Ø170mm	Ø200mm	Ø225mm	Ø240mm	Ø300mm
Temp. of Operation	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C
Cutout Size	Ø75mm	Ø95mm	Ø105mm	Ø130mm	Ø155mm	Ø185mm	Ø210mm	Ø225mm	Ø285mm
Color Temperature	2700K 6500K		2700K 6500K		2700K 6500K		2700K 6500K		2700K 6500K

CE RoHS



Model No.	31241	31242	31243	31244	31245	31246	31247	31248	31249
Wattage	3W	4W	6W	9W	12W	15W	18W	20W	24W
Finishing	White/Satin Nickel	White/Satin Nickel	White/Satin Nickel	White/Satin Nickel	White/Satin Nickel	White/Satin Nickel	White/Satin Nickel	White/Satin Nickel	White/Satin Nickel
Luminous Flux	200lm±10%	280lm±10%	400lm±10%	600lm±10%	800lm±10%	1000lm±10%	1200lm±10%	1300lm±10%	1600lm±10%
Mounting Option	Recessed	Recessed	Recessed	Recessed	Recessed	Recessed	Recessed	Recessed	Recessed
Voltage	175~265VAC or 85~265VAC	175~265VAC or 85~265VAC	175~265VAC or 85~265VAC	175~265VAC or 85~265VAC	175~265VAC or 85~265VAC	175~265VAC or 85~265VAC	175~265VAC or 85~265VAC	175~265VAC or 85~265VAC	175~265VAC or 85~265VAC
Power Factor	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50
Energy Efficiency Class	A+	A+	A+	A+	A+	A+	A+	A+	A+
Life Time	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h	25,000h
Beam Angle	120°	120°	120°	120°	120°	120°	120°	120°	120°
Dimensions	85x85mm	105x105mm	120x120mm	145x145mm	170x170mm	200x200mm	225x225mm	240x240mm	300x300mm
Temp. of Operation	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C
Cutout Size	75x75mm	95x95mm	105x105mm	130x130mm	155x155mm	185x185mm	210x210mm	225x225mm	285x285mm
Color Temperature	2700K 6500K		2700K 6500K		2700K 6500K		2700K 6500K		2700K 6500K

CE RoHS

INNOLITE
GREEN LIGHTING SOLUTION



LED Panel Lights
Panel Downlights



**Round
Surface**

**Square
Surface**



Model No.	31223	31225	31227	31229
Wattage	6W	12W	18W	24W
Finishing	White/Satin Nickel		White/Satin Nickel	
Luminous Flux	400lm±10%	800lm±10%	1200lm±10%	1600lm±10%
Mounting Option	Surface	Surface	Surface	Surface
Voltage	175~265VAC or 85~265VAC		175~265VAC or 85~265VAC	
Power Factor	> 0.50	> 0.50	> 0.50	> 0.50
Energy Efficiency Class	A+	A+	A+	A+
Life Time	25,000h	25,000h	25,000h	25,000h
Beam Angle	120°	120°	120°	120°
Dimensions	Ø120mm	Ø170mm	Ø225mm	Ø300mm
Temp. of Operation	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C
Color Temperature	2700K		6500K	

CE RoHS



Model No.	31263	31265	31267	31269
Wattage	6W	12W	18W	24W
Finishing	White/Satin Nickel		White/Satin Nickel	
Luminous Flux	400lm±10%	800lm±10%	1200lm±10%	1600lm±10%
Mounting Option	Surface	Surface	Surface	Surface
Voltage	175~265VAC or 85~265VAC		175~265VAC or 85~265VAC	
Power Factor	> 0.50	> 0.50	> 0.50	> 0.50
Energy Efficiency Class	A+	A+	A+	A+
Life Time	25,000h	25,000h	25,000h	25,000h
Beam Angle	120°	120°	120°	120°
Dimensions	120x120mm	170x170mm	225x225mm	300x300mm
Temp. of Operation	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C
Color Temperature	2700K		6500K	

CE RoHS

J
LED Panel Lights
Panel Downlights



**Slim Round
Narrow Edge**

**Slim Square
Narrow Edge**



Model No.	31301	31302	31303	31304	31306
Wattage	6W	9W	12W	18W	24W
Finishing	White/Satin Nickel	White/Satin Nickel	White/Satin Nickel	White/Satin Nickel	White/Satin Nickel
Luminous Flux	400lm±10%	600lm±10%	800lm±10%	1200lm±10%	1600lm±10%
Mounting Option	Recessed	Recessed	Recessed	Recessed	Recessed
Voltage	175~265VAC or 85~265VAC	175~265VAC or 85~265VAC	175~265VAC or 85~265VAC	175~265VAC or 85~265VAC	175~265VAC or 85~265VAC
Power Factor	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50
Energy Efficiency Class	A+	A+	A+	A+	A+
Life Time	25,000h	25,000h	25,000h	25,000h	25,000h
Beam Angle	120°	120°	120°	120°	120°
Dimensions	Ø90mm	Ø120mm	Ø145mm	Ø170mm	Ø225mm
Temp. of Operation	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C
Cutout Size	Ø75mm	Ø105mm	Ø130mm	Ø155mm	Ø205mm
Color Temperature					

CE RoHS



Model No.	31341	31342	31343	31344	31346
Wattage	6W	9W	12W	18W	24W
Finishing	White/Satin Nickel	White/Satin Nickel	White/Satin Nickel	White/Satin Nickel	White/Satin Nickel
Luminous Flux	400lm±10%	600lm±10%	800lm±10%	1200lm±10%	1600lm±10%
Mounting Option	Recessed	Recessed	Recessed	Recessed	Recessed
Voltage	175~265VAC or 85~265VAC	175~265VAC or 85~265VAC	175~265VAC or 85~265VAC	175~265VAC or 85~265VAC	175~265VAC or 85~265VAC
Power Factor	> 0.50	> 0.50	> 0.50	> 0.50	> 0.50
Energy Efficiency Class	A+	A+	A+	A+	A+
Life Time	25,000h	25,000h	25,000h	25,000h	25,000h
Beam Angle	120°	120°	120°	120°	120°
Dimensions	90x90mm	120x120mm	145x145mm	170x170mm	225x225mm
Temp. of Operation	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C
Cutout Size	75x75mm	105x105mm	130x130mm	155x155mm	205x205mm
Color Temperature					

CE RoHS

INNOLITE®
GREEN LIGHTING SOLUTION



LED Panel Lights
Panel Downlights



**Round Surface
Narrow Edge**

**Square Surface
Narrow Edge**



Model No.	31322	31323	31324	31326
Wattage	9W	12W	18W	24W
Finishing	White/Satin Nickel	White/Satin Nickel	White/Satin Nickel	White/Satin Nickel
Luminous Flux	600lm±10%	800lm±10%	1200lm±10%	1600lm±10%
Mounting Option	Surface	Surface	Surface	Surface
Voltage	175-265VAC or 85-265VAC	175-265VAC or 85-265VAC	175-265VAC or 85-265VAC	175-265VAC or 85-265VAC
Power Factor	> 0.50	> 0.50	> 0.50	> 0.50
Energy Efficiency Class	A+	A+	A+	A+
Life Time	25,000h	25,000h	25,000h	25,000h
Beam Angle	120°	120°	120°	120°
Dimensions	Ø120mm	Ø145mm	Ø170mm	Ø225mm
Temp. of Operation	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C
Cutout Size	Ø105mm	Ø130mm	Ø155mm	Ø205mm
Color Temperature				

CE RoHS



Model No.	31362	31363	31364	31366
Wattage	9W	12W	18W	24W
Finishing	White/Satin Nickel	White/Satin Nickel	White/Satin Nickel	White/Satin Nickel
Luminous Flux	600lm±10%	800lm±10%	1200lm±10%	1600lm±10%
Mounting Option	Surface	Surface	Surface	Surface
Voltage	175-265VAC or 85-265VAC	175-265VAC or 85-265VAC	175-265VAC or 85-265VAC	175-265VAC or 85-265VAC
Power Factor	> 0.50	> 0.50	> 0.50	> 0.50
Energy Efficiency Class	A+	A+	A+	A+
Life Time	25,000h	25,000h	25,000h	25,000h
Beam Angle	120°	120°	120°	120°
Dimensions	120x120mm	145x145mm	170x170mm	225x225mm
Temp. of Operation	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C
Cutout Size	105x105mm	130x130mm	155x155mm	205x205mm
Color Temperature				

CE RoHS



INNOLITE®
GREEN LIGHTING SOLUTION



LED Floodlights

Discover LED technology by applying INNOLITE® LED Floodlights (Projectors) in outdoor areas such as gardens, building facades, bridges and tunnels, you will experience a diffuse and versatile light effect with different colors of light.

I N N O L I T E®

INNOLITE
GREEN LIGHTING SOLUTION

K

LED Floodlights

LED
Floodlights
Slim PH Style



LED
Floodlights
Slim IP Style



Model No.	33642	33643	33644	33645	33646
Wattage	20W	30W	50W	70W	100W
Material of Case	PVC or Aluminum	PVC or Aluminum	PVC or Aluminum	Aluminum	Aluminum
Finishing	Grey, White, Black	Grey, White, Black	Grey, White, Black	Grey, White, Black	Grey, White, Black
LED Type	SMD	SMD	SMD	SMD	SMD
Luminous Efficiency	110lm/w	110lm/w	110lm/w	110lm/w	110lm/w
Voltage	190~260VAC or 85~265VAC				
Power Factor	> 0.95	> 0.95	> 0.95	> 0.95	> 0.95
Energy Efficiency Class	A+	A+	A+	A+	A+
LifeTime	50,000h	50,000h	50,000h	50,000h	50,000h
Beam Angle	60°	60°	60°	60°	60°
IP Rating	IP65	IP65	IP65	IP65	IP65
Temp. of Operation	~30°C~+50°C				
Dimensions	160x120x35mm	195x140x35mm	270x200x35mm	316x232x40mm	316x232x40mm
Color Temperature					

CE RoHS



Model No.	33631	33633	33634	33635	33636
Wattage	15W	30W	50W	70W	100W
Material of Case	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Finishing	White, Black	White, Black	White, Black	White, Black	White, Black
LED Type	SMD	SMD	SMD	SMD	SMD
Luminous Efficiency	110lm/w	110lm/w	110lm/w	110lm/w	110lm/w
Voltage	190~260VAC or 85~265VAC				
Power Factor	> 0.95	> 0.95	> 0.95	> 0.95	> 0.95
Energy Efficiency Class	A+	A+	A+	A+	A+
LifeTime	50,000h	50,000h	50,000h	50,000h	50,000h
Beam Angle	120°	120°	120°	120°	120°
IP Rating	IP65	IP65	IP65	IP65	IP65
Temp. of Operation	~30°C~+50°C				
Dimensions	115x90x36mm	195x145x36mm	220x160x36mm	285x205x36mm	285x205x36mm
Color Temperature					

CE RoHS



LED Floodlights BK Style SMD

LED Floodlights BK Style COB



Model No.	33621	33622	33623	33624	33625	33626	33627	33628
Wattage	10W	20W	30W	50W	100W	150W	200W	300W
Material of Case	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Finishing	Black	Black	Black	Black	Black	Black	Black	Black
LED Type	COB	COB	COB	COB	COB	COB	COB	COB
Luminous Efficiency	90lm/w	90lm/w	90lm/w	90lm/w	90lm/w	90lm/w	90lm/w	90lm/w
Voltage	190~260VAC or 85~265VAC	190~260VAC or 85~265VAC	190~260VAC or 85~265VAC	190~260VAC or 85~265VAC	190~260VAC or 85~265VAC	190~260VAC or 85~265VAC	190~260VAC or 85~265VAC	190~260VAC or 85~265VAC
Power Factor	> 0.90	> 0.90	> 0.90	> 0.90	> 0.90	> 0.90	> 0.90	> 0.90
Energy Efficiency Class	A+	A+	A+	A+	A+	A+	A+	A+
LifeTime	50,000h	50,000h	50,000h	50,000h	50,000h	50,000h	50,000h	50,000h
Beam Angle	120°	120°	120°	120°	120°	120°	120°	120°
IP Rating	IP65	IP65	IP65	IP65	IP65	IP65	IP65	IP65
Temp. of Operation	-30°C~+50°C	-30°C~+50°C	-30°C~+50°C	-30°C~+50°C	-30°C~+50°C	-30°C~+50°C	-30°C~+50°C	-30°C~+50°C
Dimensions	130x110x41mm	181x158x50mm	196x172x52mm	240x210x80mm	285x255x75mm	345x310x80mm	380x349x97mm	430x480x140mm
Color Temperature	2700K		6500K		2700K		6500K	



Model No.	33611	33612	33613	33614	33615	33616	33617	33618
Wattage	10W	20W	30W	50W	100W	150W	200W	300W
Material of Case	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Finishing	Black	Black	Black	Black	Black	Black	Black	Black
LED Type	SMD	SMD	SMD	SMD	SMD	SMD	SMD	SMD
Luminous Efficiency	90lm/w	90lm/w	90lm/w	90lm/w	90lm/w	90lm/w	90lm/w	90lm/w
Voltage	190~260VAC or 85~265VAC	190~260VAC or 85~265VAC	190~260VAC or 85~265VAC	190~260VAC or 85~265VAC	190~260VAC or 85~265VAC	190~260VAC or 85~265VAC	190~260VAC or 85~265VAC	190~260VAC or 85~265VAC
Power Factor	> 0.90	> 0.90	> 0.90	> 0.90	> 0.90	> 0.90	> 0.90	> 0.90
Energy Efficiency Class	A+	A+	A+	A+	A+	A+	A+	A+
LifeTime	50,000h	50,000h	50,000h	50,000h	50,000h	50,000h	50,000h	50,000h
Beam Angle	120°	120°	120°	120°	120°	120°	120°	120°
IP Rating	IP65	IP65	IP65	IP65	IP65	IP65	IP65	IP65
Temp. of Operation	-30°C~+50°C	-30°C~+50°C	-30°C~+50°C	-30°C~+50°C	-30°C~+50°C	-30°C~+50°C	-30°C~+50°C	-30°C~+50°C
Dimensions	130x110x41mm	181x158x50mm	196x172x52mm	240x210x80mm	285x255x75mm	345x310x80mm	380x349x97mm	430x480x140mm
Color Temperature	2700K		6500K		2700K		6500K	



LED String Lights

Bring a little sparkle in your home garden! INNOLITE® LED String Lights will glitter like gemstones in the night on your balcony, windowsill, terrace, and in your yard or living room during wedding, anniversaries or holiday celebration. It is best suited for the romantic and celebrative moods no matter indoor or outdoor.

I N N O L I T E®



This luminaire is compatible with bulbs of the energy classes:

The luminaire is sold with a bulb of the energy class: **A+**



Size CABLE FEET ↔ Customized	Includable LED BULBS E26/E27 Sockets	Impact Resistant Durable Acrylic	Connect Multiple Strings ^(*) Maxi 1500W	Year-Round ^(*) Indoor & outdoor
---	--	---	---	---



LED String Lights



Crystal Bubble Bulb



Model No.	37791
Bulb Type	S14/ST45
Wattage	1.5W
IP Rating	IP65
Lamp Cover	Acrylic Clear (Impact Resistant)
Luminous Flux	70lm±10%
Voltage	220~240VAC or 110~130VAC or 85~265VAC
Power Factor	> 0.50
Energy Efficiency Class	A+
Life Time	25,000h
Beam Angle	360°
Lamp Base	E26, E27
Temp. of Operation	-20°C~+50°C
Dimensions	Ø45x80mm
Color Temperature	1800K 6500K

CE RoHS



Model No.	34101	34111
Product Style	EU Style	US Style
Size	21 Feet (6.40M) or Customized	36/48 Feet or Customized
IP Rating	Cable & Socket: IP65 Plug: IP44	Cable & Socket: IP65 Plug: IP44
Material	Cable: PVC or Rubber Socket: PVC Wire: 100% Copper	Cable: PVC Socket: PVC Wire: 100% Copper
Wire Gauge	2C or 3C, 0.5mm ² , 0.75mm ² , 1.0mm ² , 1.5mm ²	2C or 3C, 14AWG, 16AWG, 18AWG
Wiring Type	Parallel (All rest bulbs will stay lit in case of any bulb burns out)	
Socket Type	E27 Suspended or Fixed Socket	E26 Suspended or Fixed Socket
Max. Power	1500W	1500W
Qty of Sockets	9pcs or Customized	9pcs or Customized
Space between Sockets	71cm or Customized	Customized
Plug Type	VDE 2 Pin or 3 Pin Waterproof Connected Plug	UL 2 Pin or 3 Pin Waterproof Connected Plug
Connection	Multiple Strings Connectable	Multiple Strings Connectable
Color	Black, White, Green, Brown	Black, White, Green, Brown
Temp. of Operation	-20°C ~ +85°C (Indoor & Outdoor)	-20°C ~ +85°C (Indoor & Outdoor)

CE RoHS



LED String Lights

LED Crystal Bubble Ball String Lights




Model No.	34121	34131
Product Style	EU Style	US Style
Size	21 Feet (6.40M) or Customized	36/48 Feet or Customized
IP Rating	Cable & Socket: IP65 Plug: IP44	Cable & Socket: IP65 Plug: IP44
Material	Cable: PVC or Rubber Socket: PVC Wire: 100% Copper	Cable: PVC Socket: PVC Wire: 100% Copper
Wire Gauge	2C or 3C, 0.5mm ² , 0.75mm ² , 1.0mm ² , 1.5mm ²	2C or 3C, 14AWG, 16AWG, 18AWG
Socket Type	E27 Suspended or Fixed Socket	E26 Suspended or Fixed Socket
Qty of Sockets	9pcs or Customized	9pcs or Customized
Lamp Power	1.5W	1.5W
Voltage	220~240VAC	110~130VAC
Max. Power	1500W	1500W
Plug Type	VDE 2 Pin or 3 Pin Waterproof Connected Plug	UL 2 Pin or 3 Pin Waterproof Connected Plug
Connection	Multiple Strings Connectable	Multiple Strings Connectable
Temp. of Operation	-20°C~+50°C (Indoor&Outdoor)	-20°C~+50°C (Indoor&Outdoor)
Color Temperature	1800K 6500K	R G B Y

CE RoHS



Pendant Lamp Cords

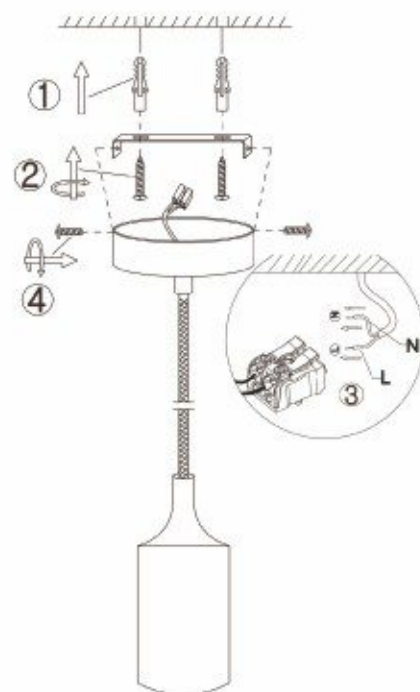

Model No.	34201	34202
Product Color	White	Black
Material	Plastic+Silicone	Plastic+Silicone
Size	1.5M (Adjustable)	1.5M (Adjustable)
IP Rating	IP20	IP20
Cable	PVC cable coated nylon braided	
Wire Gauge	2C or 3C, 0.5mm ² , 0.75mm ² , 1.0mm ² , 1.5mm ²	
Max. Power	60W	60W
Socket Type	E26, E27	E26, E27
Socket	Silicone	Silicone
Canopy	Plastic	Plastic
Max. Weight Loading	1.5KG	1.5KG
Installation	Suspension	Suspension
Application	Indoor only	Indoor only
Temp. of Operation	-20°C~+85°C	-20°C~+85°C



Pendant Lamp Cords



Model No.	34301	34302	34303	34304	34305
Product Color	Antique Brass	Antique Copper	Black, Nickel (Dark Chrome)	Polished Chrome	Satin Nickel (Brushed Chrome)
Material	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Size	1.5M (Adjustable)	1.5M (Adjustable)	1.5M (Adjustable)	1.5M (Adjustable)	1.5M (Adjustable)
IP Rating	IP20	IP20	IP20	IP20	IP20
Cable	PVC cable coated nylon braided		PVC cable coated nylon braided		
Wire Gauge	2C or 3C, 0.5mm ² , 0.75mm ² , 1.0mm ² , 1.5mm ²		2C or 3C, 0.5mm ² , 0.75mm ² , 1.0mm ² , 1.5mm ²		
Max. Power	60W	60W	60W	60W	60W
Socket Type	E26, E27	E26, E27	E26, E27	E26, E27	E26, E27
Socket	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Canopy	Metal	Metal	Metal	Metal	Metal
Max. Weight Loading	1.5KG	1.5KG	1.5KG	1.5KG	1.5KG
Installation	Suspension	Suspension	Suspension	Suspension	Suspension
Application	Indoor only	Indoor only	Indoor only	Indoor only	Indoor only
Temp. of Operation	-20°C~+85°C	-20°C~+85°C	-20°C~+85°C	-20°C~+85°C	-20°C~+85°C



INNOLITE®
GREEN LIGHTING SOLUTION

N
Energy Saving
Halogen Bulbs



**GLS
A19/A60/A55**



**Golf Ball
G45/P45**



Model No.	63201	63202	63203	63204	63205	63206
Wattage	18W	28W	42W	52W	70W	100W
Lamp Cover	Clear	Clear	Clear	Clear	Clear	Clear
Luminous Flux	205lm±10%	370lm±10%	625lm±10%	835lm±10%	1175lm±10%	1900lm±10%
Equivalent Incandescent	25W	40W	60W	75W	100W	150W
Voltage	220~240VAC or 110~130VAC			220~240VAC or 110~130VAC		
Energy Efficiency Class	C	C	C	C	C	C
Life Time	2,000h	2,000h	2,000h	2,000h	2,000h	2,000h
Beam Angle	360°	360°	360°	360°	360°	360°
Lamp Base	E26, E27, B22	E26, E27, B22	E26, E27, B22	E26, E27, B22	E26, E27, B22	E26, E27, B22
Temp. of Operation	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C
Dimensions	A55: Ø55x96mm A60: Ø60x106mm			A55: Ø55x96mm A60: Ø60x106mm		
Color Temperature	2700K 2900K			2700K 2900K		

CE RoHS




Model No.	63216	63217	63218
Wattage	18W	28W	42W
Lamp Cover	Clear	Clear	Clear
Luminous Flux	205lm±10%	370lm±10%	625lm±10%
Equivalent Incandescent	25W	40W	60W
Voltage	220~240VAC or 110~130VAC		
Energy Efficiency Class	C	C	C
Life Time	2,000h	2,000h	2,000h
Beam Angle	360°	360°	360°
Lamp Base	E12, E14, E26, E27, B22		
Temp. of Operation	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C
Dimensions	E14: Ø45x77mm E27: Ø45x72mm		
Color Temperature	2700K 2900K		

CE RoHS

N
Energy Saving
Halogen Bulbs

Candle C35

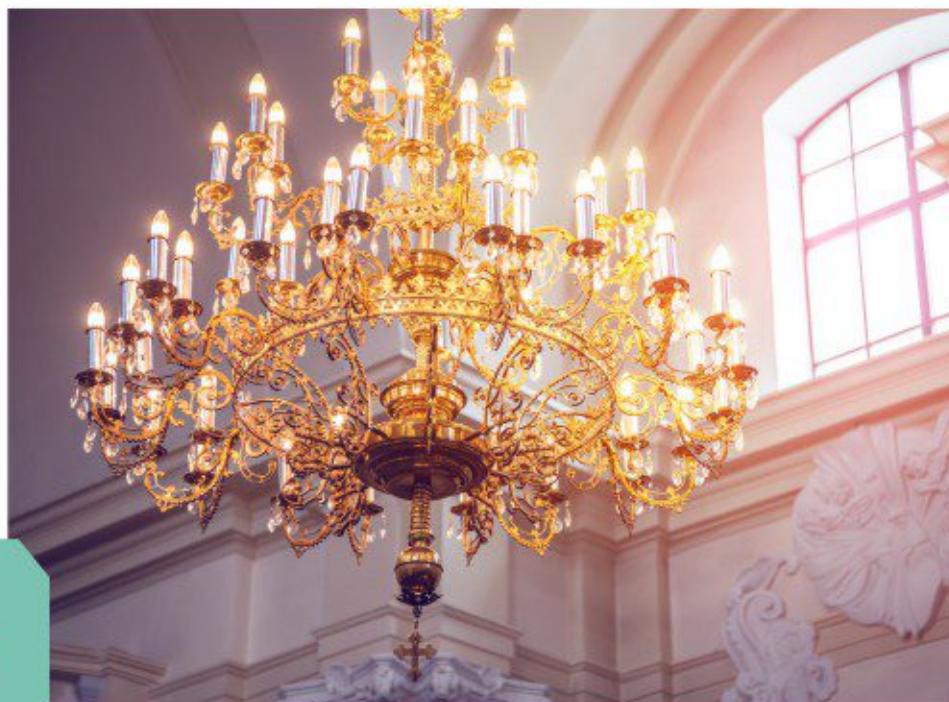

Model No.	63224	63225	63226
Wattage	18W	28W	42W
Lamp Cover	Clear	Clear	Clear
Luminous Flux	205lm±10%	370lm±10%	625lm±10%
Equivalent Incandescent	25W	40W	60W
Voltage	220~240VAC or 110~130VAC		
Energy Efficiency Class	C	C	C
Life Time	2,000h	2,000h	2,000h
Beam Angle	360°	360°	360°
Lamp Base	E12, E14, E26, E27, B22		
Temp. of Operation	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C
Dimensions	E14: Ø35x99mm E27: Ø35x94mm		
Color Temperature	 2700K 2900K		

CE RoHS



Description Of the Color Temperature

