



## Product Description

With a antique tubular shape design, INNOLITE 5W [T30 Vintage long tubular LED filament bulb](#) has been seen as a great innovation which is a perfect combination of LED technology and incandescent bulb. It is a perfect choice for residential decoration to make home warmer, and also is recommended for commercial use to offer a homely atmosphere to customer.

Meanwhile, this tubular T30 [LED filament bulb](#) also can be dimmable by regular Triac dimmers to provide a much warmer and more useful light for you. Unlike the traditional incandescent bulb, it also is a eco-friendly product as without lead or mercury and without UV or IR radiation. The installation is very easy as with the same international lamp base E26 E27 B22, you can replace the old bulbs in a few seconds.



## Product Specification

Model No.	37882
Power	5W
Cover type	Amber or Smoke
Luminous Flux	380lm ± 10%
LED Filament Spec.	6X38
Input Voltage	220-240VAC or 110-130VAC
Material	Glass
Color Temp (CCT)	1800K - 3000K
Energy Efficiency Label	A+
Beam Angle	360°
Color Rendering Index	≥80 Ra
Power factor	≥0.5
Start Time	<0.5S
Switching Cycle	≥12,500
Life time	Up to 25,000 hours
Lamp Base	E27 E26 B22
Dimensions	Dia.=30mm
	L=300mm



## Product Certificates

CE RoHS ErP SAA  FC



## Related Products

Model No.	Bulb Type	Dimension	LED Filament Spec.	Wattage(W)	Luminous Flux(lm)
-----------	-----------	-----------	--------------------	------------	-------------------

37881	Tube T30-L300	Ø30X300mm	5x38	4W	320lm ± 10%
37883			7x38	6W	450lm ± 10%
37884			8x38	7W	500lm ± 10%




## Product Test Report

### Product Mark

Product Type :  
 Temperature :26'C  
 Operator :01  
 Remark :

Manufacturer :Innotech  
 Humidity :65%  
 Test Date :2017-12-29

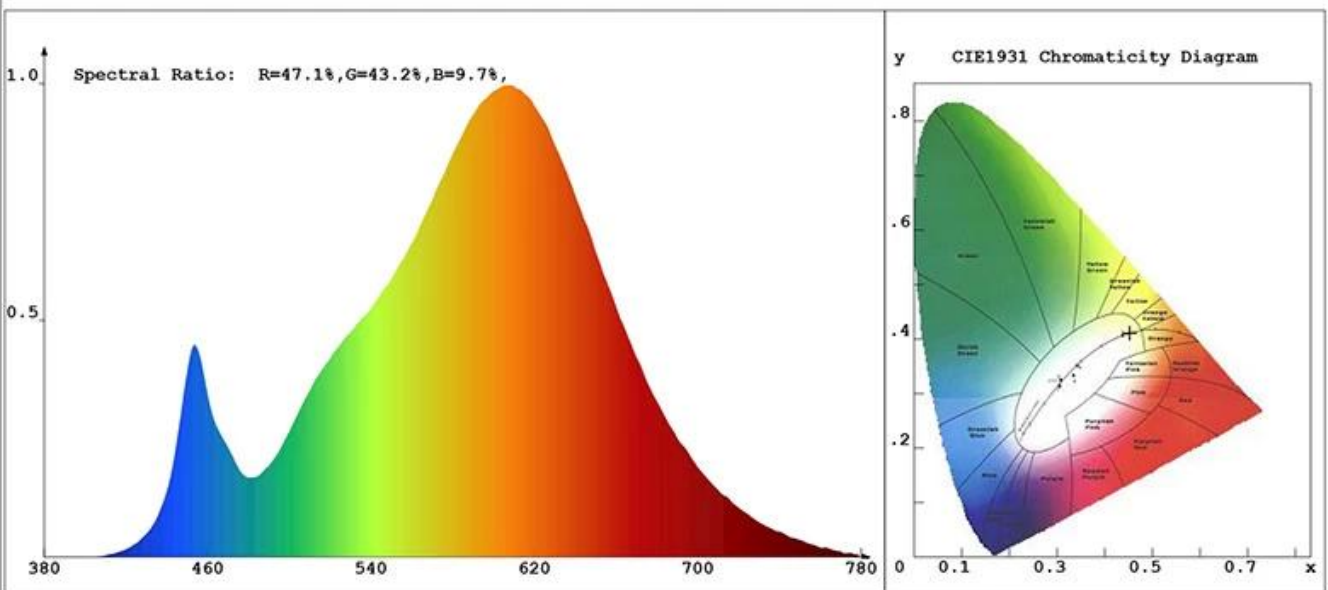

### Chroma Parameters

Chro.Coor.:x=0.4522 y=0.4109 u=0.2574 v=0.3509 duv=0.0008  
 CCT: 2813K Dominant Wave.:583.4nm Purity:59.1%  
 Flux RGB Ratio:R=24.1%,G=74.4%,B=1.4% Peak Wave:606.7nm Half Width:127.9nm

### Rendering Index:Ra= 82.7

R1 =81 R2 =91 R3 =97 R4 =80 R5 =81 R6 =89 R7 =83 R8 =60  
 R9 =12 R10=79 R11=79 R12=69 R13=83 R14=99 R15=74

### Photo Parameters

Flux:441.82lm Effi.:107.8lm/W Radiant:1290.7mW Iv:0.0mcd  
 Efficiency:0.102 Effi Level:A++ (EU 874-2012)

### Ele. Parameters

Voltage:U=230.000V Current:I=0.0230A  
 Power:P=4.10W Power Factor:PF=0.763


### Instrument state

Instrument:Hopoo HP8000S Integral Time: 75.747ms VPeak: 14616  
 VDark: 1161 Scan Range: 380-780nm Product ID: 201710386



## **Product show**

# Vintage LED Filament Bulb

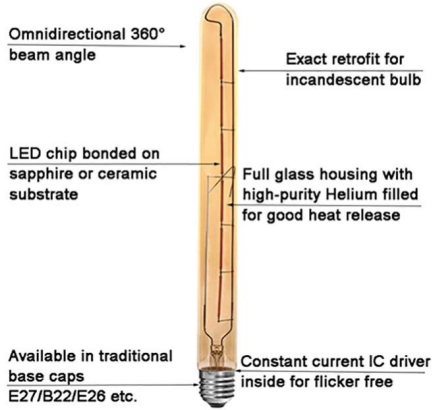

## Features & Advantages





## Advantages

- <sup>2</sup> Exact retrofit for incandescent bulb
- <sup>2</sup> 360° beam angle delivers a even distribution of light without creating shadows
- <sup>2</sup> Up to 85% energy saving with new LED filament technology
- <sup>2</sup> No flicker to protect human eyes
- <sup>2</sup> High CRI > 80 ensures more vivid and natural light
- <sup>2</sup> Environment friendly: No lead or mercury and No UV or IR Radiation
- <sup>2</sup> Long life time lasts up to 10 years (4 hours use per day)
- <sup>2</sup> Dimmable
- <sup>2</sup> Two years limited warranty based on average daily use of 4 hours
- <sup>2</sup> With certification of CE LVD EMC RoHS ErP, ETL, FCC, etc.



## Application

With a classic tube shape design, INNOLITE 5W T30 Vintage long tubular LED filament bulb ([Vintage filament LED tube bulbs](#)) can widely emit warm white color to every corner with 360 degree beam angle glass transparent body. It can offer perfect lighting solution for home, garden, hotel, office and warehouse, etc.

### Operation and maintenance

- <sup>2</sup> Ambient temperature range -20° C to 40°C.
- <sup>2</sup> Store and use the bulb/lamp the same way as traditional bulb/lamp.
- <sup>2</sup> Check your fixtures are properly wired and don't deliver voltage spike to bulb/lamp causing overheating/failure.
- <sup>2</sup> Bulb/lamp should be kept free from contamination.
- <sup>2</sup> Good condition of the lamp-holder contacts is important to ensure proper operation of bulb/lamp.
- <sup>2</sup> Switch off mains supply before installing or removing bulb/lamp.
- <sup>2</sup> Ensure bulb/lamp is cool before removing.

**Warning:** Discontinue use if damaged.

# Application



## Package

1 pc LED bulb per color box, then 50pcs packed in one standard export carton.(1pc/color box, 50pcs/carton)

## Return Policy

We provide a free TWO YEARS LIMITED WARRANTY based on average daily use of 4 hours for this item.

Should returns be required:

Step 1) Contact us with this website email.

Step 2) Provide as much detail as possible about the problem you are having.



Step 3) Authorization to return the item will be issued.

Step 4) Return the item for the agreed replacement or refund.



Q1.Are you a manufacturer?

A1: Yes, we are an experienced manufacturer with our own molds and production lines.

Q2.How about quality of products?

A2: Our technicians and QC teams test the products one by one using aging line, professional devices and instruments to ensure the quality for all products.

Q3.How about price?

A3: We are a manufacturer and always offer our customers the most competitive prices.

Q4.How to place an order?

A4: Contact with online service, or sent email to us directly, we will reply to you with product price, specifications, packing etc. soon. Thank you.

Q5.May I buy samples from you?

A5: Yes! You are welcome to place sample order to test our superior quality and service, mixed samples are acceptable.

Q6.Can I visit your factory?

A6: Yes, welcome to visit our factory at your convenient time.

Q7.How can I make OEM or ODM orders?

A7: We have different print processing for different OEM/ODM orders. Please contact us with online service or send email to us directly.

Q8. How should I pay for my orders?

A8: You can pay by T/T, L/C at sight would be available for qualified bank and MOQ required for each order.

**Logistics**

Sample order ship by DHL, UPS, FedEx, TNT, EMS etc  
 For mass order delivery, can be optional with terms of Exwork, FOB, CNF, CIF by air or by sea based on the buyer's forwarder or ours



**Certifications**



**Exhibition & Fair**



**Factory Show**

