product Description

INNOLITE Tailed candle CA35 LED(<u>Tailed Candle CA32 CA35 LED Filament Lamps</u>) bulb can offer you cozy and soft warm ambient light in any space with a traditional incandescent candle look and feel. This 4W LED candelabra bulb is the perfect equivalent for an 40W traditional tailed candle bulb, it offers the same warm light but can save up 90% energy and last 25 times longer.

Unlike the traditional bulbs, Innolite tailed candle LED filament bulb gives off a 360 degree omni-directional beam angle light without any shadow or flicker for over 10 years (based on 4 hours per day). Meanwhile it also is environmental friendly as mercury-free and no UV radiation. Installation also is very easy as the same base cap.

Meanwhile this bulb also can be dimmable from 10% to 100% by a Traic dimmer for customized light you love.



Specification

model no.	37235		
Power	4W		
Cover type	Clear		
Luminous flux	450lm ± 10%		
Equivalent to bulb	40W		
LED Filament Spec.	4 x 38 mm		
Input voltage	220-240VAC or 110-130VAC		
Material	Glass		
Color Temp (CCT)	2700K - 6500K		
Energy efficiency class	A ++		
Beam Angle	360 °		
Color Rendering Index	□80 Ra		
Power factor			
start time	<0.5S		
switching Cycle	≥12,500		
Lifetime	Up to 25,000 hours		
lamp base	E12 E14 E26 E27 B22		
Measure	Dia. = 35mm		
	E14: L=122mm, E27: L=117mm		



product Certifications

(RoHS ErP SAA @ FC





model no.	Bulb Type	Wattal (W)	LED Filament Spec.	Luminous Flux (lm)	Equivalent bulb
37252	CA32	2W	2 x38	220lm ± 10%	25W
37255	CA32	4W	4 x38	450lm ± 10%	40W
37256	CA32	5.5 W	6 x38	550lm ± 10%	50W
37232	CA35	2W	2 x38	220lm ± 10%	25W
37236	CA35	5.5 W	6 x38	550lm ± 10%	50W



Product Test Report

Light Source Test Report

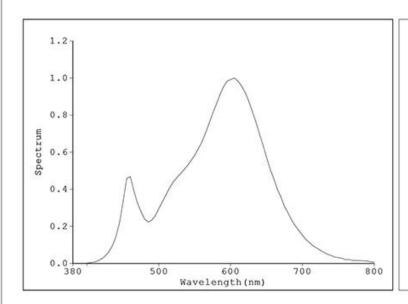



Color Parameters:

 $\label{lem:chromaticity coordinate:x=0.4404(dx=-0.0001)} P=0.4051(dy=-0.0001) \\ Chromaticity Coordinate:u'=0.2524 & v'=0.5223(duv=-4.02e-05) \\ Tc=2951K & Dominant WL:Ld=583.0nm & Purity=53.8\% & Centroid WL:590.0nm \\ Purity=53.00m \\ Purity=50.00m \\ Purity=5$

 ${\tt Ratio:R=25.0\%~G=72.5\%~B=2.5\%~Peak~WL:Lp=605.0nm~HWL:122.0nm}$

Render Index:Ra=82.2

R1 =81 R2 =93 R3 =94 R4 =79 R5 =81 R6 =91 R7 =81

R8 = 57 R9 = 5 R10 = 83 R11 = 78 R12 = 73 R13 = 84 R14 = 98 R15 = 73

Photo Parameters:

Flux: 404.05 lm Fe: 1.3902 W Efficacy:102.5 lm/W

WHITE: ANSI 3000K

Electrical Parameters:


Luminaire: U=230.6V I=0.03267A P=3.942W PF=0.5217

Lamp : U=0V I=0A P=0W PF=1.000

Instrument Status:



product Exhibition



Features & Advantages





















- ² 360 ° beam angle gives even distribution of light without creating shadows
- ² Up to 90% energy saving with new LED(China tailed candle bulb supplier) filament technology: 7W LED equivalent to 60W incandescent bulb
- ² Retrofit size and classic vintage design for traditional glowing looks
- ² No flicker to protect human eyes
- ² High CRI & gt; 80 guarantees more vibrant and natural light
- ² Environmentally friendly: No lead or mercury and no UV or IR radiation
- ² Long life lasts up to 10 years (4 hours usage per day)
- ² dimmable
- ² Two-year limited warranty based on average daily use of 4 hours
- ² With CE / LVD / EMC / RoHS / ErP / SAA / ETL certification



Application

With a soft warm and nostalgic ambient light, Innolite tailed candle CA35 LED filament bulb is ideal for creating cozy and nostalgic lighting ambiance in living room, dining room, kitchen, bedroom, hallway, hotel, restaurant, study, bar, bistro, coffee shop, museum, etc. It typically is used in chandeliers, foyer fixtures, wall sconces, recessed coves, pendant lamp, crystal lamp, etc.

Operation and maintenance

- ² Ambient temperature range -20 ° C to 40 ° C.
- ² Store and use the lamp / lamp in the same way as a traditional lamp / lamp.
- ² Make sure your luminaires are properly connected and do not deliver voltage tip to the lamp / lamp that causes overheating / malfunction.
- ² Lamp / lamp should be kept free from contamination.
- ² Good contact with the lamp holder contacts is important to ensure that the lamp / lamp is working properly.
- ² Switch off the mains voltage before installing or removing the lamp / lamp.
- ² Make sure the lamp / lamp is cold before removing it.

Warning: Cancel use if it is damaged.





Package

1 pc LED(Candelabra LED filament bulbs manufacturer) bulb per color box, then 50pcs packed in one standard export carton.(1pc/color box,50pcs/carton)



return Policy

We provide a free two-year LIMITED WARRANTY based on the average daily use of 4 hours for this product. Should return be required

- Step 1) Contact us with this site's email.
- Step 2) Give as much detail as possible about the problem you have.
- Step 3) Permission to return the item will be issued.

Step 4) Return the item for the agreed replacement or refund.



Q1. Are you a manufacturer?

A1: Yes, we are an experienced manufacturer with custom molds and production lines.

Q2. How about product quality?

A2: Our technicians and QC teams test the products one by one using aging line, professional devices and instruments to ensure the quality of all products.Q3.How about the price?

A3: We are a manufacturer and always offer our customers the most competitive prices.

Q4. Do you order?

A4: Contact with online service or send us an e-mail immediately, we will reply soon to product price, specifications, packaging, etc. Tack.Q5. Can I buy samples from you?

A5: Yes! You are welcome to place test orders to test our superior quality and service, mixed samples are acceptable.

Q6. Can I visit your factory?

A6: Yes, welcome to visit our factory at your appropriate time.

Q7. How can I make OEM or ODM orders?

A7: We have different print jobs for different OEM / ODM orders. Please contact us with online service or email us directly.

Q8. How do I pay for my orders?

A8: You can pay with T / T, L / C at the point of view would be available to qualified bank and MOQ required for each order.



Sample order ship by DHL, UPS, FedEx, TNT, EMS etc. For mass order delivery, can be optional with terms of Exwork, FOB, CNF, CIF by air or by sea based on the buyer's forwarder or ours



* Certifications



Exhibition & Fair



Factory Show

