Product Description

With a classic S60(Classic S60 LED filament bulbs) shape design, INNOLITE classic can offer a warm amber glow that creates a Nostalgic feel in any space. It is perfect for use in pendant lights, chandeliers, or any decorative fixture where the bulb is visible.

With high quality LED filaments(Filament LED lamps manufacturer china), this bulb is more energy saving than traditional incandescent bulbs with the similar brightness but lasts 25 times longer. The installation is very easy as with the same international lamp base E26 E27 B22, you can replace the old bulbs in a few seconds.

Meanwhile, it also can be dimmable by regular Triac dimmers to provide a much warmer and more useful light for you. Unlike the traditional incandescent bulb, it also is a eco-friendly product as without lead or mercury and without UV or IR radiation.



Product Specification

Model No.	37892	
Power	4W	
Cover type	Amber or Smoke	
Luminous Flux	320lm ± 10%	
LED Filament Spec.	4X38	
Input Voltage	220-240VAC or 110-130VAC	
Material	Glass	
Color Temp (CCT)	1800K - 3000K	
Energy Efficiency Label	A+	
Beam Angle	360°	
Color Rendering Index	□80 Ra	
Power factor		
Start Time	<0.5S	
Switching Cycle	≥12,500	
Life time	Up to 25,000 hours	
Lamp Base	E27 E26 B22	
Dimensions	Dia.=60mm	
Difficusions	L=158mm	



Product Certificates

(RoHS ErP SAA @ FC



Model No.	Bulb Type	Dimension	LED Filament Spec.	Wattage(W)	Luminous Flux(lm)
--------------	-----------	-----------	--------------------	------------	----------------------

37891	· Classic S60		2x38	2W	160lm ± 10%
37893		Ø60X158mm	6x38	6W	450lm ± 10%



Product Test Report

HP8000LED快速光色电测试系统

Product Mark

Product Type : Temperature :26'C


Operator :01

Remark:

Manufacturer : Innotech

Humidity :65%

Test Date :2017-12-29

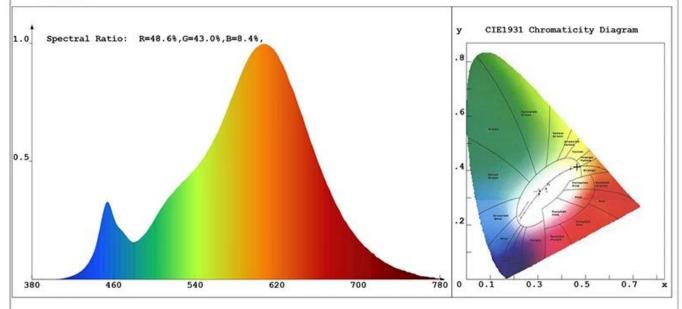

Chroma Parameters

Chro.Coor.:x=0.4645 y=0.4142 u=0.2639 v=0.3529 duv=0.0010

CCT: 2664K Dominant Wave.:584.1nm Purity:63.8%

Flux RGB Ratio: R=25.4%, G=73.3%, B=1.3% Peak Wave: 606.7nm Half Width: 114.6nm

Rendering Index: Ra= 82.5

R1 =83 R2 =93 R3 =94 R4 =78 R5 =79 R6 =90 R7 =84 R8 =60 R9 =9 R10=84 R11=77 R12=76 R13=86 R14=97 R15=75

Photo Parameters

Flux:449.51lm Effi.:120.81m/W Radiant:1322.3mW Iv:0.0mcd

Efficiency: 0.092 Effi Level: A++ (EU 874-2012)

Ele. Parameters

Voltage:U=230.100V Current:I=0.0290A Power:P=3.72W Power Factor:PF=0.552

Instrument state

Instrument: Hopoo HP8000S Integral Time: 63.588ms VPeak: 13576

VDark: 1244 Scan Range: 380-780nm Product ID: 201710386











- ² Exact retrofit for incandescent bulb
- ² 360° beam angle delivers a even distribution of light without creating shadows
- ² Up to 85% energy saving with new LED filament technology
- ² No flicker to protect human eyes
- ² High CRI > 80 ensures more vivid and natural light
- ² Environment friendly: No lead or mercury and No UV or IR Radiation
- ² Long life time lasts up to 10 years (4 hours use per day)
- ² Dimmable
- ² Two years limited warranty based on average daily use of 4 hours
- ² With certification of CE LVD EMC RoHS ErP, etc



Application

With a classic S shape design, INNOLITE vintage S60 LED filament bulb 4W(Vintage LED Filament bulbs) can deliver a classic ambiance light in living room, bedroom, hallway, exhibition hall, showroom, showcase, art-room, museums, bar, bistro, coffee shop, cafes, restaurant, hotel, etc. It is perfect for use in pendant lights, chandeliers or any decorative fixture, etc.

Operation and maintenance

- ² Ambient temperature range -20° C to 40°C.
- ² Store and use the bulb/lamp the same way as traditional bulb/lamp.
- ² Check your fixtures are properly wired and don't deliver voltage spike to bulb/lamp causing overheating/failure.
- ² Bulb/lamp should be kept free from contamination.
- ² Good condition of the lamp-holder contacts is important to ensure proper operation of bulb/lamp.
- ² Switch off mains supply before installing or removing bulb/lamp.
- ² Ensure bulb/lamp is cool before removing.

Warning: Discontinue use if damaged.

Application











Package

1 pc LED bulb per color box, then 25pcs packed in one standard export carton.(1pc/color box, 25pcs/carton)



Return Policy

We provide a free TWO YEARS LIMITED WARRANTY based on average daily use of 4 hours for this item. Should returns be required:

- Step 1) Contact us with this website email.
- Step 2) Provide as much detail as possible about the problem you are having.
- Step 3) Authorization to return the item will be issued.

Step 4) Return the item for the agreed replacement or refund.



Q1.Are you a manufacturer?

A1: Yes, we are an experienced manufacturer with our own molds and production lines.

Q2. How about quality of products?

A2: Our technicians and QC teams test the products one by one using aging line, professional devices and instruments to ensure the quality for all products.

Q3.How about price?

A3: We are a manufacturer and always offer our customers the most competitive prices.

Q4. How to place an order?

A4: Contact with online service, or sent email to us directly, we will reply to you with product price, specifications, packing etc. soon. Thank you.

Q5.May I buy samples from you?

A5: Yes! You are welcome to place sample order to test our superior quality and service, mixed samples are acceptable.

Q6.Can I visit your factory?

A6: Yes, welcome to visit our factory at your convenient time.

Q7. How can I make OEM or ODM orders?

A7: We have different print processing for different OEM/ODM orders. Please contact us with online service or send email to us directly.

Q8. How should I pay for my orders?

A8: You can pay by T/T, L/C at sight would be available for qualified bank and MOQ required for each order.



Sample order ship by DHL, UPS, FedEx, TNT, EMS etc. For mass order delivery, can be optional with terms of Exwork, FOB, CNF, CIF by air or by sea based on the buyer's forwarder or ours



* Certifications



Exhibition & Fair



Factory Show

