



## product Description

[INNOLITE dimmable LED G125 filament light bulb 4W](#) is available in 2700K~6500K, with a lumen output of 470 lumens, it is a perfect replacement to the traditional 40W standard incandescent globe bulb.

The lamp can be dimmed or not, suitable for all dimmers. The LED filament globes are also available in 80mm and 95mm diameters. They are a perfect lamp a multitude of applications, domestic, retail and commercial settings.

The innovative design of the exposed LED filaments replicates the appearance of the incandescent filament bulb offering a 360 degree light distribution as well as all the other benefits of LED technology. They have an average life of 25,000 hours and a warranty period of 2 years making them an excellent replacement to incandescent lamps.



## Specification

Model No.	37521	
Power	4W	
Cover type	Clear	Frosted
Luminous Flux	470lm $\pm$ 10%	420lm $\pm$ 10%
Equivalent to Incandescent	40W	
LED Filament Spec.	4 x 38mm	
Input Voltage	220-240VAC or 110-130VAC	
Material	Glass	
Color Temp (CCT)	2700K - 6500K	
Energy Efficiency Label	A++	
Beam Angle	360°	
Color Rendering Index	≥80 Ra	
Power factor	≥0.5	
Start Time	<0.5S	
Switching Cycle	≥12,500	
Life time	Up to 25,000 hours	
Lamp Base	E27 E26 B22	
Dimensions	Dia.= 125mm	
	L= 175mm	



## product Certifications



## Related Products

Model No.	Wattage(W)	LED Filament Spec.	Luminous Flux(lm)	Equivalent Incandescent Bulb
37523	7W	4 x50	806lm $\pm$ 10%	60W
37525	8W	6 x50	1055lm $\pm$ 10%	75W



## Product Test Report

### Product Mark

Product Type :350037 4W E27 3000K

Temperature :26'C


Operator :01

Remark:

Manufacturer :IN

Humidity :65%

Test Date :2019-06-17 15:40:35

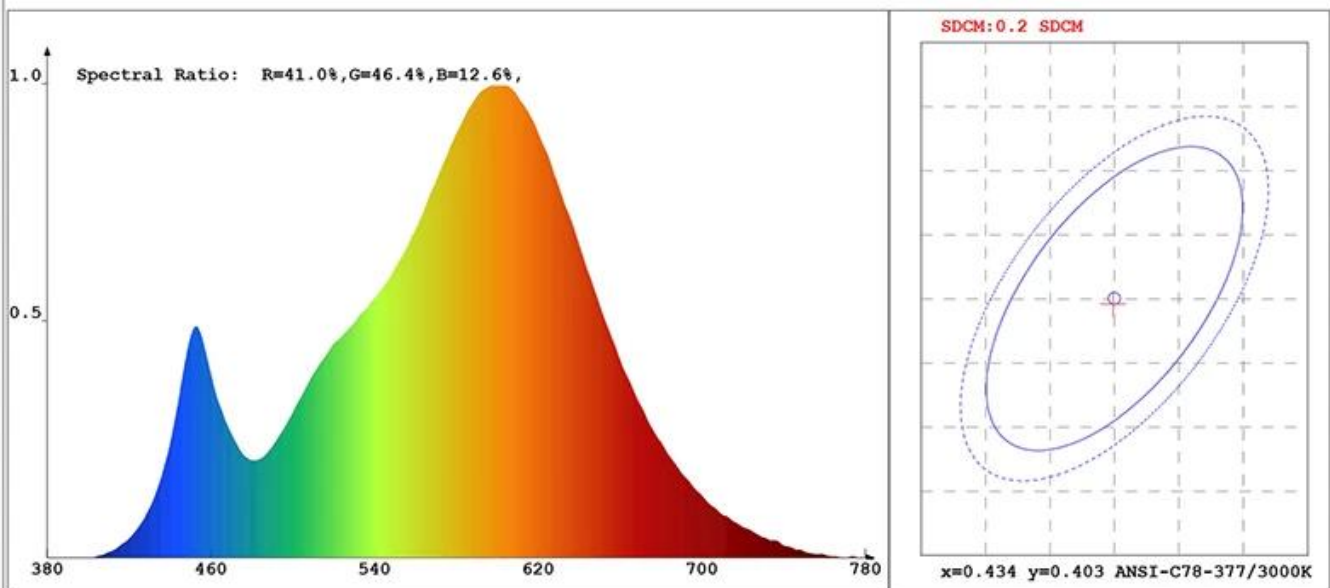

### Chroma Parameters

Chro.Coor.:x=0.4337 y=0.4026 u=0.2491 v=0.3469 duv=-0.0001

CCT: 3043K Dominant Wave.:582.7nm Purity:51.1%

Flux RGB Ratio:R=22.2%,G=76.1%,B=1.7% Peak Wave:602.8nm Half Width:121.9nm

### Rendering Index:Ra= 80.1

R1 =78 R2 =90 R3 =96 R4 =78 R5 =79 R6 =88 R7 =81 R8 =54

R9 =-4 R10=76 R11=76 R12=70 R13=80 R14=98 R15=70

### Photo Parameters

Flux:489.23lm

Effi.:119.0lm/W

Radiant:1425.9mW

Iv:0.0mcd

Efficiency:0.095

Effi Level:A++ (EU 874-2012)

### Ele. Parameters

Voltage:U=230.700V

Current:I=0.0320A


Power:P=4.11W

Power Factor:PF=0.548




## product Exhibition

## LED Filament Bulb

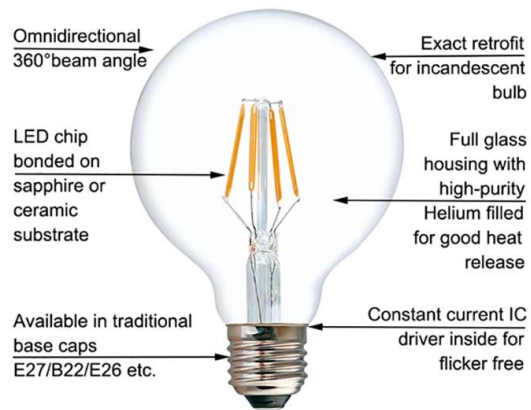

## Features & Advantages

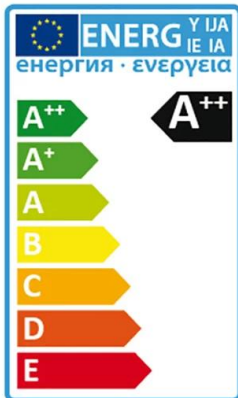



## advantages

- <sup>2</sup> High brightness 130lm per watt
- <sup>2</sup> 360° beam angle delivers a even distribution of light without creating shadows
- <sup>2</sup> Up to 90% energy saving with new LED filament technology: 6.5W LED equivalent to 60W incandescent bulb
- <sup>2</sup> Retrofit size and classic vintage design for traditional incandescent look and feel
- <sup>2</sup> High CRI > 80 ensures more vivid and natural light
- <sup>2</sup> Environment friendly: No lead or mercury and No UV or IR Radiation
- <sup>2</sup> Long life lasts up to 10 years (4 hours usage per day)
- <sup>2</sup> Dimmable
- <sup>2</sup> Two years limited warranty based on average daily use of 4 hours
- <sup>2</sup> With certification of CE LVD EMC RoHS ErP SAA ETL FCC, etc.



## Application

With classic globe shape, [INNOLITE globe G125 LED filament light bulb](#) can give off a soft warm light. It is suitable for living room, bed room, dining-room, porch, show room, hotel, shop, bistro, restaurant, landscape, exhibition, etc.

## Operation and maintenance

- <sup>2</sup> Ambient temperature range -20 ° C to 40 ° C.
- <sup>2</sup> Store and use the bulb/lamp the same way as traditional bulb/lamp.
- <sup>2</sup> Check your fixtures are properly wired and don't deliver voltage spike to bulb/lamp causing overheating/failure.
- <sup>2</sup> Bulb/lamp should be kept free from contamination.
- <sup>2</sup> Good condition of the lamp-holder contacts is important to ensure proper operation of bulb/lamp.
- <sup>2</sup> Switch off mains supply before installing or removing bulb/lamp.
- <sup>2</sup> Ensure bulb/lamp is cool before removing.

**Warning:** Discontinue use if damaged.

# Application



## Package

1 pc LED bulb per color box, then 20pcs packed in one standard export carton. (1pc/color box, 20pcs per carton)



## Return Policy

We provide a free TWO YEARS LIMITED WARRANTY based on average daily use of 4 hours for this item.  
Should returns be required:  
Step 1) Contact us with this website email.



- Step 2) Provide as much detail as possible about the problem you are having.  
Step 3) Authorization to return the item will be issued.  
Step 4) Return the item for the agreed replacement or refund.



## FAQ

Q1. Are you a manufacturer?

A1: Yes, we are an experienced manufacturer with custom molds and production lines.

Q2.How about product quality?

A2: Our technicians and QC teams test the products one by one using aging line, professional devices and instruments to ensure the quality of all products.Q3.How about the price?

A3: We are a manufacturer and always offer our customers the most competitive prices.

Q4. Do you order?

A4: Contact with online service or send us an e-mail immediately, we will reply soon to product price, specifications, packaging, etc. Tack.Q5. Can I buy samples from you?

A5: Yes! You are welcome to place test orders to test our superior quality and service, mixed samples are acceptable.

Q6. Can I visit your factory?

A6: Yes, welcome to visit our factory at your appropriate time.

Q7. How can I make OEM or ODM orders?

A7: We have different print jobs for different OEM / ODM orders. Please contact us with online service or email us directly.

Q8. How do I pay for my orders?

A8: You can pay with T / T, L / C at the point of view would be available to qualified bank and MOQ required for each order.

## Logistics

Sample order ship by DHL, UPS, FedEx, TNT, EMS etc

For mass order delivery, can be optional with terms of Exwork, FOB, CNF, CIF by air or by sea based on the buyer's forwarder or ours



## Certifications



## Exhibition & Fair



## Factory Show

