Product Description

Innolite <u>full glass LED candle bulbs</u> are designed for residential commercial and decorative lighting, It can creat perfect atmosphere of friendly and comfortable with a warm soft light, gives the same feeling with the old incandescent bulbs and protect human's eyes.

This 4W LED candle bulb is a replacement for an 35W traditional incandescent candle bulb, offers similar brightness but uses 85% less energy and lastes 25 times longer. Meanwhile It also is eco-friendly as no any mercury and UV radiation involved and no flicker.

With a elegant design and full glass 360 degree omni-directional beam angle, it is typically used in chandeliers, candlestick lamp, wall sconces and pendant lighting or any general purpose area with an E12 E14 or E27 base socket. Installation also is very easy as the same size and standard base cap.



Product Specification

Model No.	37204	37205	
Power	4V	4W	
Bulb Finishing	Frosted	Opal	
Luminous Flux	400lm ± 10%	380lm ± 10%	
Equivalent to Incandescent	351	35W	
LED Type	SM	SMD	
Input Voltage	220-240VAC or	220-240VAC or 100-130VAC	
Material	Gla	Glass	
Color Temp (CCT)	2700K -	2700K - 6500K	
Energy Efficiency Class	A-l	A+	
Beam Angle	360	360°	
Color Rendering Index	□80	∏80 Ra	
Power factor	□0.		
Start Time	<0	<0.5S	
Switching Cycle	≥12,	≥12,500	
Life time	Up to 25,0	Up to 25,000 hours	
Lamp Base	E12 E14 E2	E12 E14 E26 E27 B22	
Dimensions	Dia.=3	Dia.=35mm	
	L=99mm(for E14), I	L=99mm(for E14), L=96mm (for E27)	



Product Certificates

(RoHS ErP SAA @ FC




Model No.	Lamp Cover	Wattage(W)	Luminous Flux(lm)	Equivalent Incandescent Bulb
37204	Frosted	4W	400lm ± 10%	35W
37205	Opal	4444	380lm ± 10%	γνου



Product Test Report

Spectrum Test Report

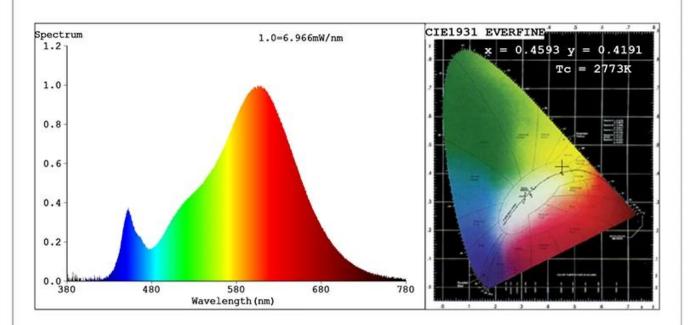

Color Parameters:

Chromaticity Coordinate:x=0.4593 y=0.4191/u'=0.2584 v'=0.5305

Tc=2773K Dominant WL:Ld =582.9nm Purity=63.7%

Red Ratio: R=26.1% Peak WL: Lp=605.6nm HWL: Lhd=117.7nm

Render Index:Ra=81.7

R1 =80 R2 =90 R3 =96 R4 =79 R5 =80 R6 =89 R7 =82

R8 =56 R9 =3 R10=79 R11=78 R12=70 R13=82 R14=99 R15=71

Photo Parameters:

Flux = 354.3 lm Eff.: 94.99 lm/W Fe = 1.059 W


Electrical parameters:

V = 229.7 V I = 0.02900 A P = 3.730 W PF = 0.5470

LEVEL:OUT WHITE:ANSI_3000K

Status: Integral T = 1251 ms Ip = 54535 (83%)

Product show

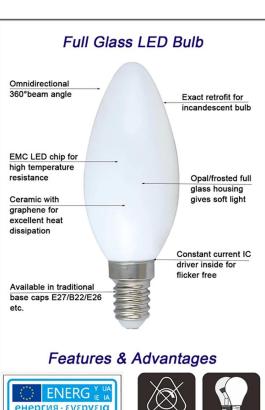





















- ² 360° beam angle delivers a even distribution of light without creating shadows
- ² Up to 85% energy saving with new LED filament technology: 8W LED equivalent to 60W incandescent bulb
- ² Retrofit size and classic vintage design for traditional incandescent look and feel
- ² No flicker to protect human eyes
- ² High CRI > 80 ensures more vivid and natural light
- ² Environment friendly: No lead or mercury and No UV or IR Radiation
- ² Long life time lasts up to 10 years (4 hours use per day)
- ² Dimmable smoothly from 10%-100%
- ² Two years limited warranty based on average daily use of 4 hours
- ² With certification of CE LVD EMC RoHS ErP SAA ETL



Application

INNOLITE Full glass LED Candle bulbs C35 4W is a perfect decoration choice for indoor lighting for home, commercial and residential, such as living room, dining room, bedroom, backyard, lobbies, restaurant, hotel, mall, bars, coffee bars, showrooms, showcase, clubs, art room, museums, etc. It is suitable for chandeliers, candlestick lamps, crystal lamps, wall sconces and pendant lighting, etc.

Operation and maintenance

- ² Ambient temperature range -20° C to 40°C.
- ² Store and use the bulb/lamp the same way as traditional bulb/lamp.
- ² Check your fixtures are properly wired and don't deliver voltage spike to bulb/lamp causing overheating/failure.
- ² Bulb/lamp should be kept free from contamination.
- ² Good condition of the lamp-holder contacts is important to ensure proper operation of bulb/lamp.
- ² Switch off mains supply before installing or removing bulb/lamp.
- ² Ensure bulb/lamp is cool before removing.

Warning: Discontinue use if damaged.

Application











Package

1 pc led bulb per color box, then 100pcs packed in one standard export carton. (1pc/color box, 100pcs/carton)



Return Policy

We provide a free TWO YEARS LIMITED WARRANTY based on average daily use of 4 hours for this item. Should returns be required:

- Step 1) Contact us with this website email.
- Step 2) Provide as much detail as possible about the problem you are having.

Step 3) Authorization to return the item will be issued.

Step 4) Return the item for the agreed replacement or refund.



Q1.Are you a manufacturer?

A1: Yes, we are an experienced manufacturer with our own molds and production lines.

Q2. How about quality of products?

A2: Our technicians and QC teams test the products one by one using aging line, professional devices and instruments to ensure the quality for all products.

Q3. How about price?

A3: We are a manufacturer and always offer our customers the most competitive prices.

Q4. How to place an order?

A4: Contact with online service, or sent email to us directly, we will reply to you with product price, specifications, packing etc. soon. Thank you.

Q5.May I buy samples from you?

A5: Yes! You are welcome to place sample order to test our superior quality and service, mixed samples are acceptable.

Q6.Can I visit your factory?

A6: Yes, welcome to visit our factory at your convenient time.

Q7. How can I make OEM or ODM orders?

A7: We have different print processing for different OEM/ODM orders. Please contact us with online service or send email to us directly.

Q8. How should I pay for my orders?

A8: You can pay by T/T, L/C at sight would be available for qualified bank and MOQ required for each order.



Sample order ship by DHL, UPS, FedEx, TNT, EMS etc. For mass order delivery, can be optional with terms of Exwork, FOB, CNF, CIF by air or by sea based on the buyer's forwarder or ours



* Certifications



Exhibition & Fair



Factory Show

