## **product Description**

One of our best sellers, the **INNOLITE G80** globe LED light bulb with long filament 8W now comes in a beautiful 3000k~6500k color temperature. Perfect for residential and commercial lighting applications where a more functional color temperature is required. Offering high lumen output, these bulbs work perfectly within and under pendants positioned over kitchen benches, in lounge rooms, hallways and bathrooms.

The long filaments mimic the old traditional carbon filament bulbs beautifully, just without the hefty power consumption.

With an average lifespan of 25,000 hours, you won't need to change this light bulb for years.



## Specification

Model No.	37505	
Power	8W	
Cover type	Clear	Frosted
Luminous Flux	1055lm ± 10%	950lm ± 10%
Equivalent to Incandescent	75W	
LED Filament Spec.	6 x 50mm	
Input Voltage	220-240VAC or 110-130VAC	
Material	Glass	
Color Temp (CCT)	2700K - 6500K	
Energy Efficiency Label	A++	
Beam Angle	360°	
Color Rendering Index	[]80 Ra	
Power factor	□0.5	
Start Time	<0.5\$	
Switching Cycle	≥12,500	
Life time	Up to 25,000 hours	
Lamp Base	E27 E26 B22	
Dimensions	Dia.= 80mm	
	L= 120mm	



### product Certifications

# (E RoHS ErP









#### **Related Products**

Model No.	Wattage(W)	LED Filament Spec.	Luminous Flux(lm)	Equivalent Incandescent Bulb
37501	4W	4 x38	470lm ± 10%	40W

37503 7W 4 x50 806lm ± 10% 60W



## **Product Test Report**

Product Mark


Product Type :350053 Temperature :26'C Operator :01

Remark:

Manufacturer : IN

Humidity :65%

Test Date :2019-07-03 10:01:44

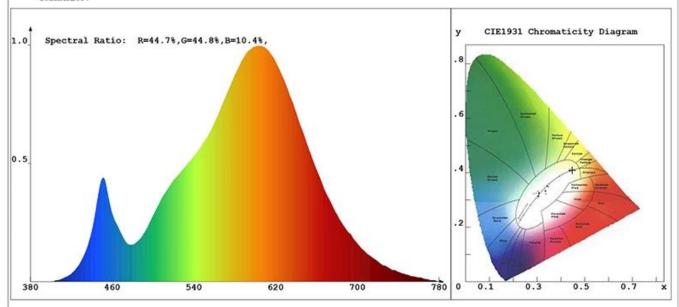

Chroma Parameters

Chro.Coor.:x=0.4474 y=0.4092 u=0.2551 v=0.3500 duv=0.0007

CCT: 2872K Dominant Wave.:583.2nm Purity:57.1%

Flux RGB Ratio: R=23.4%, G=75.2%, B=1.4% Peak Wave: 603.7nm Half Width: 123.4nm

Rendering Index: Ra= 80.8

R1 =79 R2 =89 R3 =97 R4 =78 R5 =78 R6 =87 R7 =82 R8 =56

R9 = 2 R10=76 R11=77 R12=69 R13=81 R14=99 R15=71

Photo Parameters

Flux:1056.94lm Effi.:130.5lm/W Radiant:3150.0mW Iv:0.0mcd

Efficiency: 0.101 Effi Level: A++ (EU 874-2012)

Ele. Parameters

Voltage:U=230.300V Current:I=0.0610A Power:P=8.10W Power Factor:PF=0.572



#### **LED Filament Bulb** Exact retrofit for Omnidirectional incandescent 360°beam angle bulb LED chip Full glass housing with bonded on sapphire or high-purity Helium filled ceramic substrate for good heat release Available in traditional Constant current IC base caps driver inside for flicker free E27/B22/E26 etc.

#### Features & Advantages

















- <sup>2</sup> High brightness 130lm per watt
- <sup>2</sup> 360° beam angle delivers a even distribution of light without creating shadows
- <sup>2</sup> Up to 90% energy saving with new LED filament technology: 6.5W LED equivalent to 60W incandescent bulb
- <sup>2</sup> Retrofit size and classic vintage design for traditional incandescent look and feel
- <sup>2</sup> High CRI > 80 ensures more vivid and natural light
- <sup>2</sup> Environment friendly: No lead or mercury and No UV or IR Radiation
- <sup>2</sup> Long life lasts up to 10 years (4 hours usage per day)
- <sup>2</sup> Dimmable
- <sup>2</sup> Two years limited warranty based on average daily use of 4 hours
- <sup>2</sup> With certification of CE LVD EMC RoHS ErP SAA ETL FCC, etc.



### **Application**

With classic globe shape, <u>INNOLITE G80 globe LED light bulb with long filament</u> can give off a soft warm light. It is suitable for dining-room, meeting room, drawing room, show room, hotel, shop, bistro, corridor, telephone booth, studio and exhibition etc.

#### **Operation and maintenance**

- <sup>2</sup> Ambient temperature range -20 ° C to 40 ° C.
- <sup>2</sup> Store and use the bulb/lamp the same way as traditional bulb/lamp.
- <sup>2</sup> Check your fixtures are properly wired and don't deliver voltage spike to bulb/lamp causing overheating/failure.
- <sup>2</sup> Bulb/lamp should be kept free from contamination.
- <sup>2</sup> Good condition of the lamp-holder contacts is important to ensure proper operation of bulb/lamp.
- <sup>2</sup> Switch off mains supply before installing or removing bulb/lamp.
- <sup>2</sup> Ensure bulb/lamp is cool before removing.

Warning: Discontinue use if damaged.

# **Application**











## Package

1 pc LED bulb per color box, then 40pcs packed in one standard export carton. (1pc/color box, 40pcs per carton)



## **Return Policy**

We provide a free TWO YEARS LIMITED WARRANTY based on average daily use of 4 hours for this item. Should returns be required:

Step 1) Contact us with this website email.

- Step 2) Provide as much detail as possible about the problem you are having.
- Step 3) Authorization to return the item will be issued.
- Step 4) Return the item for the agreed replacement or refund.



Q1. Are you a manufacturer?

A1: Yes, we are an experienced manufacturer with custom molds and production lines.

Q2. How about product quality?

A2: Our technicians and QC teams test the products one by one using aging line, professional devices and instruments to ensure the quality of all products.Q3.How about the price?

A3: We are a manufacturer and always offer our customers the most competitive prices.

Q4. Do you order?

A4: Contact with online service or send us an e-mail immediately, we will reply soon to product price, specifications, packaging, etc. Tack.Q5. Can I buy samples from you?

A5: Yes! You are welcome to place test orders to test our superior quality and service, mixed samples are acceptable.

Q6. Can I visit your factory?

A6: Yes, welcome to visit our factory at your appropriate time.

Q7. How can I make OEM or ODM orders?

A7: We have different print jobs for different OEM / ODM orders. Please contact us with online service or email us directly.

Q8. How do I pay for my orders?

A8: You can pay with T / T, L / C at the point of view would be available to qualified bank and MOQ required for each order.



Sample order ship by DHL, UPS, FedEx, TNT, EMS etc. For mass order delivery, can be optional with terms of Exwork, FOB, CNF, CIF by air or by sea based on the buyer's forwarder or ours



#### \* Certifications



#### Exhibition & Fair



#### Factory Show

