



product Description

With classically tailed light shapes, INNOLITE full-glare LED candle lamp is a perfect choice for replacing standard 35W bulb. Installation is also very easy due to the same size and standard basslock.

With high-quality SMD LEDs and full 360 degree beam angle, these 4W waveform LED lights provide consistent light for omnidirection without any dark shadow and glare for more than 10 years (4 hours a day). At the same time, it is also an environmentally friendly product, as no mercury and UV radiation are involved.

This LED bulb can also be dimmed smoothly from 0% to 100% with standard Triac dimmers. With LED light bulb from Indolite dimbarglas you can always enjoy adjusting the brightness of the lamp to create the most suitable lighting atmosphere.



Specification

model no.	37224	37225
Force	4W	
Bulb Finishing	Matthew	Opal
Luminous flux	400 $\mu\text{m} \pm 10\%$	380lm $\pm 10\%$
Equivalent to bulb	35W	
LED type	SMD	
Input voltage	220-240VAC or 110-130VAC	
Material	Glass	
Color Temp (CCT)	2700K - 6500K	
Energy efficiency class	A +	
Beam Angle	360 °	
Color rendering index	& Gt; 80 Ra	
Power factor	& Gt; 0.5	
start time	& Amp; It; 0.5s	
switching Cycle	$\geq 12,500$	
Lifetime	Up to 25,000 hours	
lamp base	E12 E14 E26 E27 B22	
Measure	Dia. = 35 mm	
	E14, L = 122mm; E27, L = 119 mm	



product Certifications

CE RoHS ErP SAA  FC



Related Products


model no.	Lamp-shade	Wattal (W)	Luminous Flux (lm)	Equivalent bulb
-----------	------------	------------	--------------------	-----------------

37222	Matthew	3W	270lm \pm 10%	25W
37223	Opal		250lm \pm 10%	



Product Test Report

Spectrum Test Report

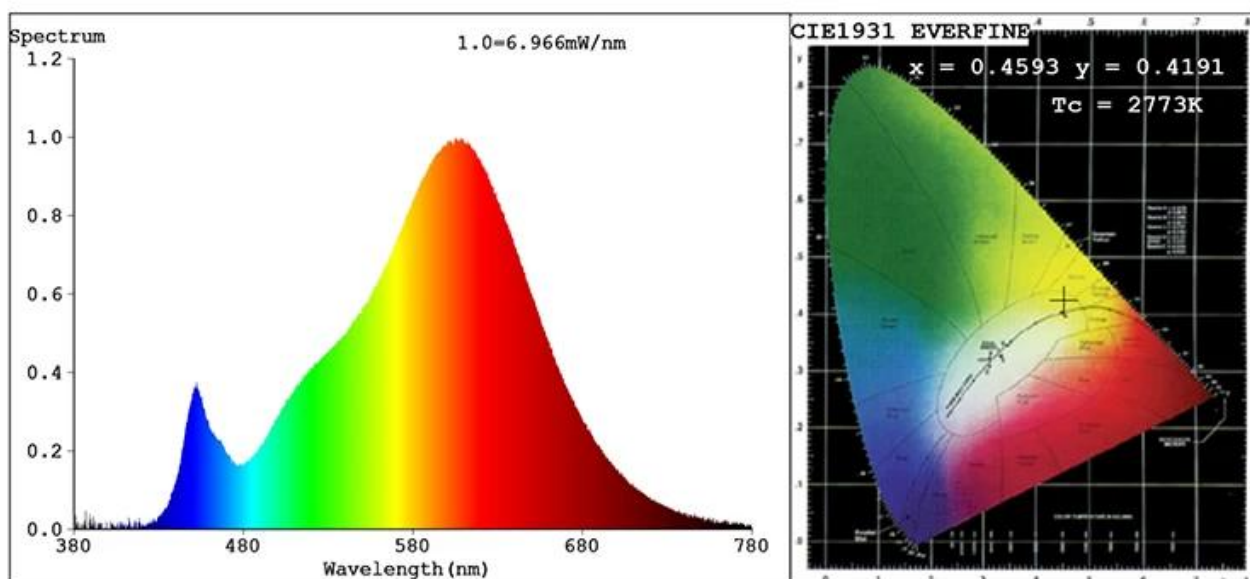

Color Parameters:

Chromaticity Coordinate: $x=0.4593$ $y=0.4191$ $u'=0.2584$ $v'=0.5305$

$T_c=2773K$ Dominant WL: $L_d=582.9nm$ Purity=63.7%

Red Ratio: $R=26.1\%$ Peak WL: $L_p=605.6nm$ HWL: $L_{hd}=117.7nm$

Render Index: $R_a=81.7$

$R_1=80$ $R_2=90$ $R_3=96$ $R_4=79$ $R_5=80$ $R_6=89$ $R_7=82$

$R_8=56$ $R_9=3$ $R_{10}=79$ $R_{11}=78$ $R_{12}=70$ $R_{13}=82$ $R_{14}=99$ $R_{15}=71$

Photo Parameters:

Flux = 354.3 lm Eff. : 94.99 lm/W Fe = 1.059 W

Electrical parameters:

V = 229.7 V I = 0.02900 A P = 3.730 W PF = 0.5470


LEVEL:OUT WHITE:ANSI_3000K

Status: Integral T = 1251 ms $I_p=54535$ (83%)



product Exhibition

Full Glass LED Bulb

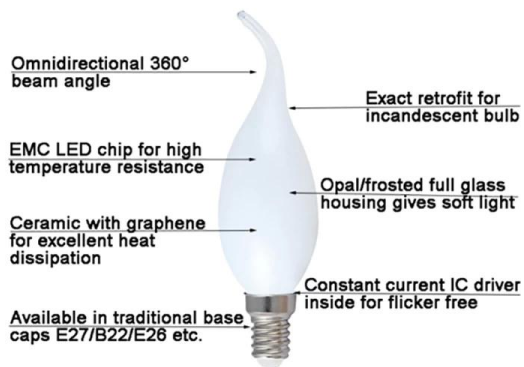

Features & Advantages





advantages

- ² 360 ° beam angle gives even distribution of light without creating shadows
- ² Up to 85% energy saving with new LED filament technology: 8W LED equivalent to 60W incandescent bulb
- ² Retrofit size and classic vintage design for traditional glowing looks
- ² Soft light without flicker to protect human eyes
- ² High CRI & gt; 80 guarantees more vibrant and natural light
- ² Environmentally friendly: No lead or mercury and no UV or IR radiation
- ² Long life lasts up to 10 years (4 hours usage per day)
- ² Dimmable smoothly from 10% -100%
- ² Two-year limited warranty based on average daily use of 4 hours
- ² With the certification of CE LVD EMC RoHS ErP SAA ETL



Application

Innotech full-glare LED light bulb lamp is usually used as a chandelier lamp, pendant lamp, etc. It can offer antique and soft light in the dining room, living room, hall, hotel, restaurant, cafe, etc.

Operation and maintenance

- ² Ambient temperature range -20 ° C to 40 ° C.
- ² Store and use the lamp / lamp in the same way as a traditional lamp / lamp.
- ² Make sure your luminaires are properly connected and do not deliver voltage tip to the lamp / lamp that causes overheating / malfunction.
- ² Lamp / lamp should be kept free from contamination.
- ² Good contact with the lamp holder contacts is important to ensure that the lamp / lamp is working properly.
- ² Switch off the mains voltage before installing or removing the lamp / lamp.
- ² Make sure the lamp / lamp is cold before removing it.

Warning: Cancel use if it is damaged.

Application



Package

1 LED light per color box, then 50 pcs packed in a regular export carton. (1pc / color box, 50pcs / carton)



return Policy

We provide a free two-year LIMITED WARRANTY based on the average daily use of 4 hours for this product. Should return be required

Step 1) Contact us with this site's email.

Step 2) Give as much detail as possible about the problem you have.

Step 3) Permission to return the item will be issued.

Step 4) Return the item for the agreed replacement or refund.



FAQ

Q1. Are you a manufacturer?

A1: Yes, we are an experienced manufacturer with custom molds and production lines.

Q2.How about product quality?

A2: Our technicians and QC teams test the products one by one using aging line, professional devices and instruments to ensure the quality of all products.

Q3.How about the price?

A3: We are a manufacturer and always offer our customers the most competitive prices.

Q4. Do you order?

A4: Contact with online service or send us an e-mail immediately, we will reply soon to product price, specifications, packaging, etc. Thanks.

Q5. Can I buy samples from you?

A5: Yes! You are welcome to place test orders to test our superior quality and service, mixed samples are acceptable.

Q6. Can I visit your factory?

A6: Yes, welcome to visit our factory at your appropriate time.

Q7. How can I make OEM or ODM orders?

A7: We have different print jobs for different OEM / ODM orders. Please contact us with online service or email us directly.

Q8. How do I pay for my orders?

A8: You can pay with T / T, L / C at the point of view would be available to qualified bank and MOQ required for each order.

Logistics

Sample order ship by DHL, UPS, FedEx, TNT, EMS etc

For mass order delivery, can be optional with terms of Exwork, FOB, CNF, CIF by air or by sea based on the buyer's forwarder or ours



Certifications



Exhibition & Fair



Factory Show

