



product Description

Innolite [LED Filament Light bulb](#) C35 4W offers a warm nostalgic ambient light in your home or commercial area with a classic glass design. This 4W bulb is the perfect replacement for a 40W incandescent bulb, which saves 90% energy and lasts 25 times longer.

Unlike traditional incandescent bulbs, Innolite LED bulbs give a 360 degree headlight light without shadow or flicker for over 10 years (based on 4 hours per day). At the same time, it is also environmentally friendly as mercury-free and no UV radiation. Installation is also very easy as the same base hat. Meanwhile, this bulb can also be dimmed from 10% to 100% of a Traic dimmer for custom light you love.



Specification

model no.	37215
Force	4W
Luminous flux	450lm ± 10%
Equivalent to bulb	40W
LED Filament Spec.	4 x 38 mm
Input voltage	220-240VAC or 110-130VAC
Material	Glass
Color Temp (CCT)	2700K - 6500K
Energy efficiency class	A ++
Beam Angle	360 °
Color Rendering Index	≥80
Power factor	□0.5
start time	□0.5s
switching Cycle	≥12,500
Lifetime	Up to 25,000 hours
lamp base	E12 E14 E26 E27 B22
Measure	Dia. = 35mm
	E14: L = 99mm, E27: L = 94mm



product Certifications

CE RoHS ErP SAA  FC



Related Products


model no.	Bulb Type	Wattal (W)	LED Filament Spec.	Luminous Flux (lm)	Equivalent bulb
-----------	-----------	------------	--------------------	--------------------	-----------------

37242	C32	2W	2 x38	220lm \pm 10%	25W
37245	C32	6W	4 x38	450lm \pm 10%	40W
37246	C32	5.5 W	6 x38	550lm \pm 10%	50W
37212	C35	2W	2 x38	220lm \pm 10%	25W
37216	C35	5.5 W	6 x38	550lm \pm 10%	50W



Product Test Report

Spectrum Test Report

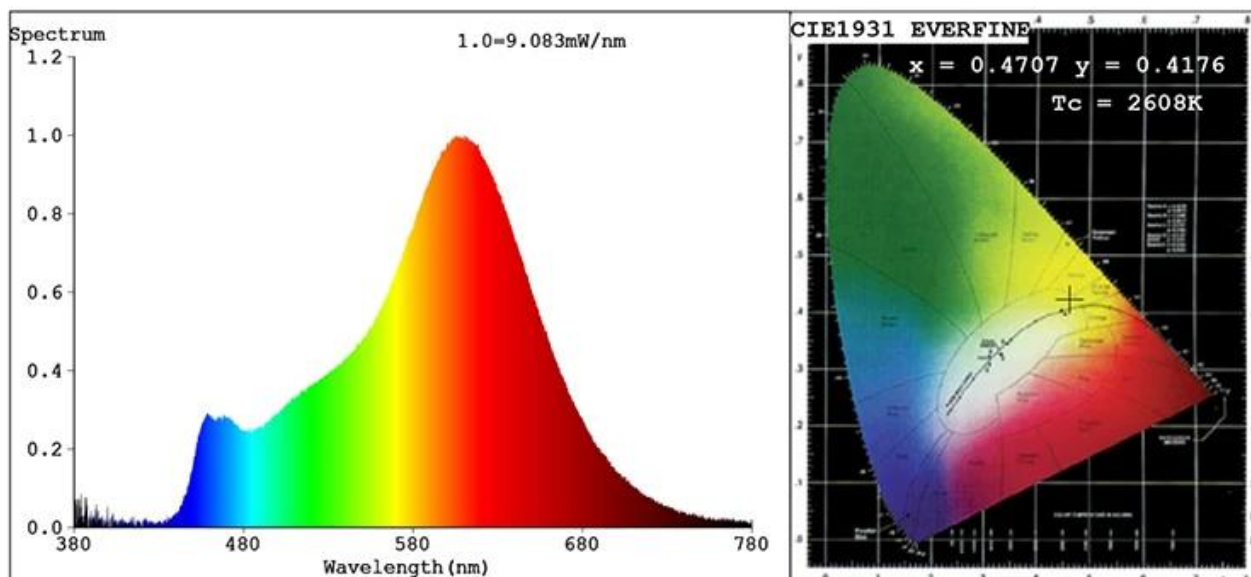

Color Parameters:

Chromaticity Coordinate: $x=0.4707$ $y=0.4176$ $u'=0.2663$ $v'=0.5316$

$T_c=2608K$ Dominant WL: $L_d = 584.1nm$ Purity=66.6%

Red Ratio: $R=28.3\%$ Peak WL: $L_p=611.2nm$ HWL: $L_{hd}=104.3nm$

Render Index: $R_a=83.5$

$R1 = 84$ $R2 = 96$ $R3 = 89$ $R4 = 81$ $R5 = 85$ $R6 = 97$ $R7 = 79$

$R8 = 57$ $R9 = 11$ $R10 = 93$ $R11 = 82$ $R12 = 83$ $R13 = 88$ $R14 = 95$ $R15 = 74$

Photo Parameters:

Flux = 436.7 lm Eff. : 99.48 lm/W $F_e = 1.347 W$

Electrical parameters:

$V = 230.0 V$ $I = 0.01900 A$ $P = 4.390 W$ PF = 0.9580

LEVEL:OUT WHITE:ANSI_2700K

Status: Integral $T = 937 ms$ $I_p = 48463 (74\%)$




product Exhibition

LED Filament Bulb



Features & Advantages

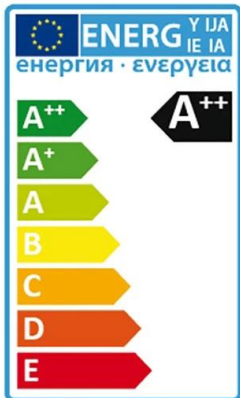



advantages

- ² 360 ° beam angle gives even distribution of light without creating shadows
- ² Up to 90% energy saving with new LED filament technology: 7W LED equivalent to 60W incandescent bulb
- ² Retrofit size and classic vintage design for traditional glowing looks
- ² No flicker to protect human eyes
- ² High CRI ≥ 80 guarantees more vibrant and natural light
- ² Environmentally friendly: No lead or mercury and no UV or IR radiation
- ² Long life lasts up to 10 years (4 hours usage per day)
- ² dimmable
- ² Two-year limited warranty based on average daily use of 4 hours
- ² With CE / LVD / EMC / RoHS / ErP / SAA / ETL certification



Application

With a warm warm and nostalgic surrounding light, **Innolite LED Bulbs Light C35 4W** is ideal for creating a warm atmosphere and relaxing atmosphere in the living room, dining room, kitchen, hallway, entrance hall, bar, hotel, cafe, bistro, restaurant, etc. It is usually used in chandeliers, foyer fixtures, wall sconces, recessed coves, ornamental fittings etc .

Operation and maintenance

- ² Ambient temperature range -20 ° C to 40 ° C.
- ² Store and use the lamp / lamp in the same way as a traditional lamp / lamp.
- ² Make sure your luminaires are properly connected and do not deliver voltage tip to the lamp / lamp that causes overheating / malfunction.
- ² Lamp / lamp should be kept free from contamination.
- ² Good contact with the lamp holder contacts is important to ensure that the lamp / lamp is working properly.
- ² Switch off the mains voltage before installing or removing the lamp / lamp.
- ² Make sure the lamp / lamp is cold before removing it.

Warning: Cancel use if it is damaged.

Application



Package

1 piece led bulb per color box, then 100 pcs packaged in a regular export carton. (1 pcs / color box, 100 pcs / carton)



return Policy

We provide a free two-year LIMITED WARRANTY based on the average daily use of 4 hours for this product. Should return be required

Step 1) Contact us with this site's email.

Step 2) Give as much detail as possible about the problem you have.

Step 3) Permission to return the item will be issued.

Step 4) Return the item for the agreed replacement or refund.



FAQ

Q1. Are you a manufacturer?

A1: Yes, we are an experienced manufacturer with custom molds and production lines.

Q2.How about product quality?

A2: Our technicians and QC teams test the products one by one using aging line, professional devices and instruments to ensure the quality of all products.Q3.How about the price?

A3: We are a manufacturer and always offer our customers the most competitive prices.

Q4. Do you order?

A4: Contact with online service or send us an e-mail immediately, we will reply soon to product price, specifications, packaging, etc. Tack.Q5. Can I buy samples from you?

A5: Yes! You are welcome to place test orders to test our superior quality and service, mixed samples are acceptable.

Q6. Can I visit your factory?

A6: Yes, welcome to visit our factory at your appropriate time.

Q7. How can I make OEM or ODM orders?

A7: We have different print jobs for different OEM / ODM orders. Please contact us with online service or email us directly.

Q8. How do I pay for my orders?

A8: You can pay with T / T, L / C at the point of view would be available to qualified bank and MOQ required for each order.

Logistics

Sample order ship by DHL, UPS, FedEx, TNT, EMS etc

For mass order delivery, can be optional with terms of Exwork, FOB, CNF, CIF by air or by sea based on the buyer's forwarder or ours



Certifications



Exhibition & Fair



Factory Show

