PWA LED Tube light fixture T8 4ft 18W, single side input LED tubes supplier



Product Description

With plastic clad aluminum material, INNOLITE PWA LED tube light fixture T8 4fts is a economic retrofit for your traditional fluorescent tube. This 18W equivalent to an 36W fluorescent tube, offer the same brightness but saving up 50% energy and lasting five time longer. Re-lamp frequency also will be drastically decreased as its lifetime expectancy exceeding 25,000+ hours.

With constant current driver inside, it offers a soft light to protect human's eyes and without flicker. Unlike traditional fluorescent tube, it is a eco-friendly product with mercury-free and lead-free and No UV or IR radiation. Also, This bulb is instant on to full brightness and without buzzing to provide better lighting experience. Start to enjoy a energy-saving and new LED tube now!



Product Specification

Model No.	31133	
Power	18W	
Tube Color	Opal	
Luminous Flux	1600lm ± 10%	
Equivalent to Fluorescent tube	36W	
Input Voltage	220-240VAC or 85-265VAC	
Material	Plastic + Aluminum	
Color Temp (CCT)	2700K - 6500K	
Energy Efficiency Class	A+	
Beam Angle	270 degree	
Power factor	□0.5	
Start Time	<0.5S	
Switching Cycle	≥12,500	
Life time	Up to 25,000 hours	
Lamp Base	G13	
Director	Dia.=26mm	
Dimensions	L=1200mm	



Product Certificates

(RoHS



Related Products

Model No.	Tubes Type	Wattage(W)	Luminous Flux(lm)	Equivalent Fluorescent Tube
-----------	------------	------------	----------------------	-----------------------------

31131		9W	800lm ± 10%	18W
31132		15W	1200lm ± 10%	30W
31134	PWA Tube T8	22W	2000lm ± 10%	48W
31135		23W	2200lm ± 10%	58W
31136		55W	4800lm ± 10%	100W

Product Test Report

Spectral test report for lamp

Product type : T8 LED Tube PC+AL 18W Test date. : 2017-07-25

Product No. : Test equipment : SPEC3000A Spectrometer

Manufacturer : Opertor.


Test Condition

Temperature : 25.0Deg C Humidity : 65%

Test range : 380nm-780nm Peak AD. : 42020 (64.1%)

Integral time. : 32ms

Spectral Parameter

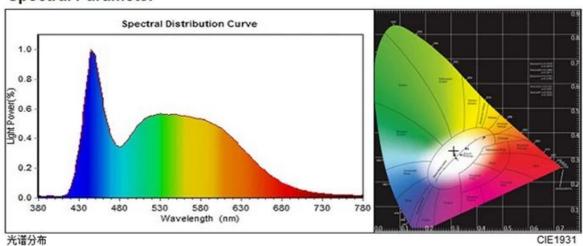

CIE Color Parameter

 Chromaticity coordinates:x=0.3081
 y=0.3295
 u=0.1944
 v=0.3119 (duv=0.0058)

 Color temperature:TC=6756 K
 Color difference:SDCM=4.1
 Main Wavelength:λd=483.04nm
 Purity:Purity=0.364

 Peak wavelength:λp=446.6 nm
 FWHM:Δλp=31.0 nm
 Color ratio:R=14.44%
 G=80.13%
 B=5.43%

Color rendering index (Ra):Ra=85.3

R1=83.5 R2=88.1 R3=91.8 R4=86.2 R5=84.9 R6=84.5 R7=89.6 R8=73.7 R9=15.9 R10=72.2 R11=86.3 R12=68.8 R13=85.3 R14=95.7 R15=78.5

Optical Parameter

Luminous flux: 1386.959 Im Iuminous efficiency:68.66 Im/w Radiant flux: 4.603 W

Electrical Parameter

Voltage: 221.0 V Current 0.095 A Watte: 20.20 W Power factor: 0.959







(RoHS



- ² Cost effective, safe retrofit for T8 Tubes.
- ² Easy installation, perfectly matches with the traditional daylight tube fixture
- ² Up to 50% energy saving: 18W LED equivalent to 36W fluorescent tube
- ² No flicker to protect human eyes
- ² No buzzing and instant on
- ² Avaliable in 60cm, 90cm, 120cm, 150cm and 240cm
- ² Environment friendly: No lead or mercury and No UV or IR Radiation
- ² Long life time lasts up to 10 years (4 hours use per day)
- ² Two years limited warranty based on average daily use of 4 hours
- ² With certification of CE RoHS, etc.



Application

INNOLITE plastic + aluminum LED tube light fixture T8 4ft can provide perfect light for any spaces with a high CRI over 80ra. These 6000 kelvin LED T8 tube light brings the vibrant ambiance to your work space or living space, and 3000 Kelvin tubes bring a soft white color that gives you a clam and relaxing atmosphere. It is perfect for general lighting in supermarket, office, conference room, parking lot, bus station, warehouse, convenience store, gas station, shop, hotel, school and home, etc.

Safety Information

² Working temperature range -20° C to 40°C

- 2 Check the lamp before installation, if there is any damage caused during transportation, do not install.
- ² Maintenance should be carried out by person who is familiar with the tube only.
- ² Do not place any objects on the lamp.
- ² Keep the lamp away from flame or high temperature objects.
- ² Only for indoor use.
- ² Only replace with same type of LED tube. Risk of electrical shock.
- ² If the glass lamp tube is broken, the lamp must be disposed immediately.

Maintenance Notes

- ² Disconnect lamp from power supply before any maintenance.
- ² Clean luminaires with dry cloth.
- ² Do not clean the lamp with corrosive chemicals.

Warning: Discontinue use if damaged.

Application









Package

1 pc LED bulb per color box, then 50pcs packed in one standard export carton.(1pc/color box,50pcs/carton)





Return Policy

We provide a free TWO YEARS LIMITED WARRANTY based on average daily use of 4 hours for this item. Should returns be required:

- Step 1) Contact us with this website email.
- Step 2) Provide as much detail as possible about the problem you are having.
- Step 3) Authorization to return the item will be issued.
- Step 4) Return the item for the agreed replacement or refund.



FAO

Q1.Are you a manufacturer?

A1: Yes, we are an experienced manufacturer with our own molds and production lines.

Q2. How about quality of products?

A2: Our technicians and QC teams test the products one by one using aging line, professional devices and instruments to ensure the quality for all products.

Q3. How about price?

A3: We are a manufacturer and always offer our customers the most competitive prices.

Q4. How to place an order?

A4: Contact with online service, or sent email to us directly, we will reply to you with product price, specifications, packing etc. soon. Thank you.

Q5.May I buy samples from you?

A5: Yes! You are welcome to place sample order to test our superior quality and service, mixed samples are acceptable.

Q6.Can I visit your factory?

A6: Yes, welcome to visit our factory at your convenient time.

Q7. How can I make OEM or ODM orders?

A7: We have different print processing for different OEM/ODM orders. Please contact us with online service or send email to us directly.

Q8. How should I pay for my orders?

A8: You can pay by T/T, L/C at sight would be available for qualified bank and MOQ required for each order.



Sample order ship by DHL_UPS, FedEx, TNT, EMS etc.
For mass order delivery, can be optional with terms of Exwork, FOB, CNF, CIF by air or by sea based on the buyer's forwarder or ours







Exhibition & Fair



Factory Show

