Product description

The Innolite Globe bulb G80 Filament Antique 4W It is designed for the subsequent replacement of incandescent lamps and is particularly attractive for decorative lighting.

This vintage edison LED 4W with a sprayed golden glass housing and produces a result of warm white light. The wide viewing angle is ideal for lighting rooms. Easy to install and use, perfect for any installation that requires a warm and intimate atmosphere.

They are compatible with appliances with E26 / E27 / B22 base and are available in extra warm white. LED lamps offer enormous energy savings and reduce maintenance costs to a minimum and can save up to 90% on energy alone.

specification

Model number:	37541
Type of light bulb	G80
Power	4W
Cover type	Amber or Smoke
Luminous flux	320 lm ± 10%
Spec of LED filament	4 x 38 mm
Input voltage	220-240 VAC or 110-130 VAC.
Material	Glass
Color Temp (CCT)	1800K - 3000K
Energy efficiency label	A +
Beam angle	360 °
Color rendering index	& Gt; 80 Ra
Power factor	& Gt; 0.5
Starting time	& Amp; Lt; 0.5S
Switching cycle	≥12,500
Lifetime	Up to 25,000 hours
Lamp base	E26 E27 B22
Operating temp	-20 ° C + 40 ° C
dimensions	Diameter = 80mm
	L = 120mm

Product certifications

CE RoHS ErP SAA ⓊⓁ FC

related products

Model number:	Type of light bulb	Dimension	Power	Luminous flux (lm)

37540	G80	Ø80X120mm	2W	160lm ± 10%
37542			6W	450lm ± 10%
37530	G95	OR95X140mm	2W	160lm ± 10%
37531			4W	320 lm ± 10%
37532			6W	450lm ± 10%
37550	G125	OR125X175mm	2W	160lm ± 10%
37551			4W	320 lm ± 10%
37552			6W	450lm ± 10%

Product test report

Product Mark

Product Type :G80 Fila 4W 2200K DIM   Manufacturer :INNOTECH

Temperature :26'C   Humidity :65%

Operator :01   Test Date :2017-11-28 11:41:53

Remark:

Spectral Ratio: R=65.6%,G=30.8%,B=3.6%,

CIE1931 Chromaticity Diagram
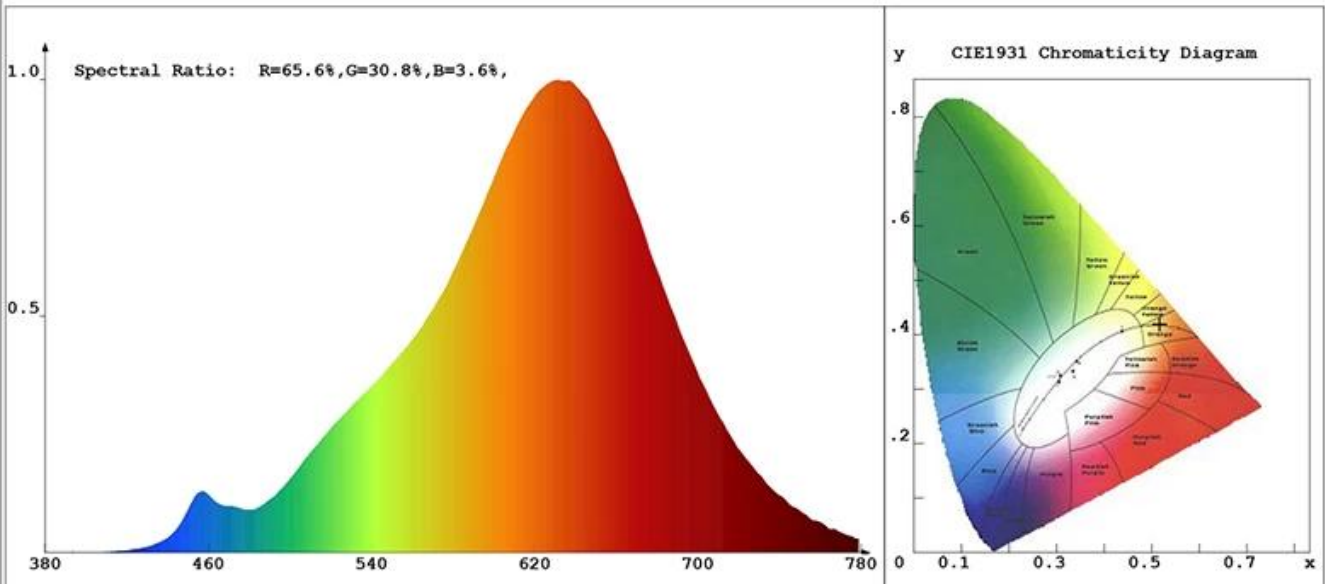
Chroma Parameters

Chro.Coor.:x=0.5166   y=0.4198   u=0.2950   v=0.3596   duv=0.0016

CCT: 2128K   Dominant Wave.:587.3nm   Purity:81.1%

Flux RGB Ratio:R=32.3%,G=66.9%,B=0.8%   Peak Wave:631.8nm   Half Width:120.6nm

Rendering Index:Ra= 90.5

R1 =88	R2 =93	R3 =96	R4 =95	R5 =95	R6 =96	R7 =86	R8 =74
R9 =54	R10=86	R11=97	R12=88	R13=88	R14=96	R15=83	

Photo Parameters

Flux:251.41lm   Effi.:71.41m/W   Radiant:940.8mW   Iv:0.0mcd

Efficiency:0.134   Effi Level:A+ (EU 874-2012)

Ele. Parameters

Voltage:U=230.000V   Current:I=0.0160A
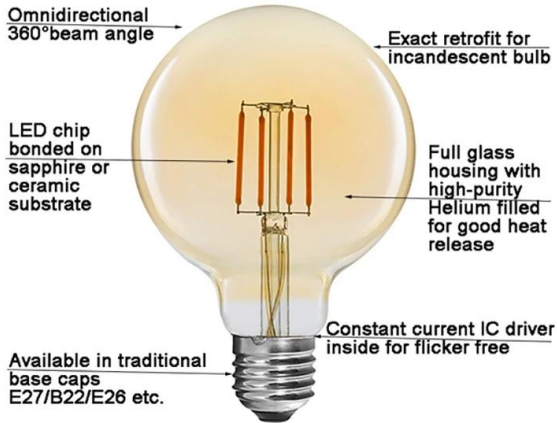
Power:P=3.52W   Power Factor:PF=0.934

Instrument state

Instrument:Hopoo HP8000S   Integral Time: 127.492ms   VPeak: 15928

VDark: 1148   Scan Range: 380-780nm   Product ID: 201710386

Product display

Vintage LED Filament Bulb

Omnidirectional 360°beam angle

Exact retrofit for incandescent bulb

LED chip bonded on sapphire or ceramic substrate

Full glass housing with high-purity Helium filled for good heat release

Available in traditional base caps E27/B22/E26 etc.

Constant current IC driver inside for flicker free

Features & Advantages

ENERG Y UA IE IA
енергия · ενεργεια

A++
A+
A
B
C
D
E

A+

Dimmable

Exact Retrofit

No flicker

Hg

CRI>80

On/Off≥12500

advantages

² Exact retrofit for incandescent bulb

² The 360 ° beam angle offers uniform light distribution without creating shadows

² Up to 80% energy savings with the new LED filament technology

² No flickering to protect human eyes

² High CRI & gt; 80 guarantees a more vivid and natural light

² Environmentally friendly: no lead or mercury and no UV or IR radiation

² The long duration lasts up to 10 years (4 hours of use per day)

² dimmable

² Two-year limited warranty based on an average daily use of 4 hours

² With CE LVD EMC RoHS ErP certification, etc..

Application

In the shape of a vintage globe and soft lighting, Innolite Globe G80 LED incandescent bulbs can directly replace traditional tungsten light bulbs, used on a variety of occasions in life or work. This Vinage G80 LED filament light is so wonderful to be used in restaurants, hotels, restaurants or private homes. It is also suitable for hotels, dining rooms, meeting rooms, living rooms, showrooms, shops, corridors, telephone booths, studios and shows, etc.

Operation and maintenance

² Ambient temperature range from -20 ° C to 40 ° C.

² Store and use the bulb / lamp in the same way as the traditional bulb / lamp.

² Check that the devices are correctly wired and do not supply voltage peaks to the bulb / lamp causing overheating / failure.

² The bulb / lamp must be kept free from contamination.

² The good condition of the lamp holder contacts is important to ensure the correct operation of the lamp / bulb.

² Turn off the mains supply before installing or removing the bulb / lamp.

² Make sure the bulb / lamp is cold before removing it.

Warning: Discontinue use if damaged.

Application
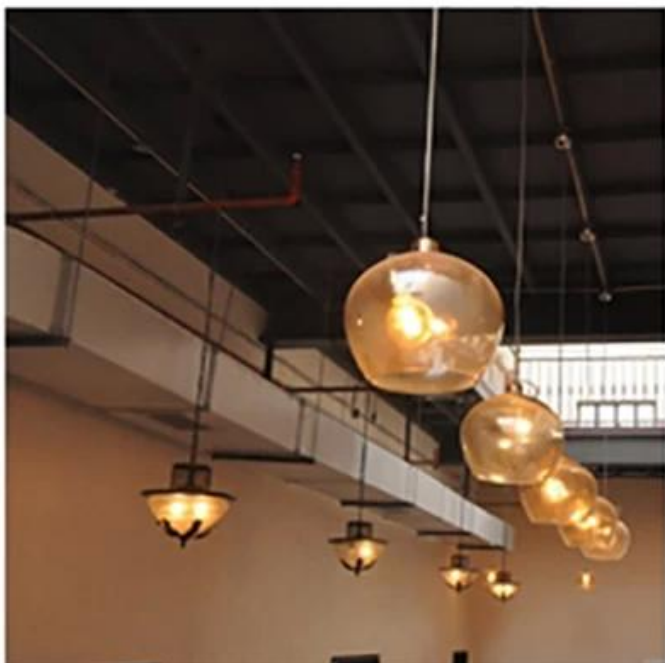
Package

1 LED pc light bulb per color box, then 30pcs packed in a standard export carton. (1pc / color box, 30 pieces per carton)

Rethnic politics

We provide a TWO-YEAR LIMITED WARRANTY based on the average daily use of 4 hours for this item. Returns should be requested:
Step 1) Contact us with this site email address.

Step 2) Provide as many details as possible about the problem you are experiencing.
Step 3) The authorization to return the item will be issued.
Step 4) Return the item for the agreed replacement or refund.

🔆 FAQ

Q1. Are you a producer?
A1: Yes, we are an experienced manufacturer with custom molds and production lines.

Q2.How is the product quality?
A2: Our technicians and quality control teams test the products one by one using the aging line, devices and professional tools to guarantee the quality of all products. Q3 What about the price?

A3: We are a manufacturer and always offer our customers the most competitive prices.
Q4. Orders?

A4: Contact the online service or send us an e-mail immediately, we will reply soon to the price of the product, specifications, packaging, etc. Tack.Q5. Can I buy samples from you?
A5: Yes! You are welcome to place trial orders to test our superior quality and service, mixed samples are acceptable.

Q6. Can I visit your factory?
A6: Yes, welcome to visit our factory at the appropriate time.

Q7. How can I make OEM or ODM orders?
A7: We have different print jobs for different OEM / ODM orders. Please contact us with the online service or send us an e-mail directly.

Q8. How do I pay my orders?
A8: You can pay by T / T, L / C at the point of view would be available for qualified bank and MOQ required for each order.

Logistics

Sample order ship by DHL, UPS, FedEx, TNT, EMS etc
For mass order delivery, can be optional with terms of Exwork, FOB, CNF, CIF by air or by sea based on the buyer's forwarder or ours

Certifications

Exhibition & Fair

Factory Show