Product Description

INNOLITE Vintage LED filament bulbs ST64 6W can can add an elegant and historic touch to your house with the soft warm lighting. These Innolite meticulously crafted vintage light bulb delivers a classic ambience to any space you love.

With an E26 E27 B22 base, this bulb can fit standard home lighting sockets as well as any pendant light fixtures, commercial string lights, lamps, chandeliers which use an E26 or E27 socket, installation is very easy. Meanwhile, it also can be dimmable by regular Triac dimmers to provide a much brighter and more useful light for you.

Unlike the traditional incandescent bulb, it is also an environmental friendly product as no any mercury and UV radiation involved and with different shapes such as globe shape , pear shape etc. to let you enjoy different features. So start to enjoy a classic ambience in your home now.

Product Specification

Model No.	37733
Power	6W
Glass Color	Amber or Smoke
Luminous Flux	450lm ± 10%
LED Filament Spec.	6 x 38
Input Voltage	220-240VAC or 100-130VAC
Material	Glass
Color Temp (CCT)	1800K - 3000K
Energy Efficiency Class	A+
Beam Angle	360°
Color Rendering Index	[]80 Ra
Power factor	[]0.5
Start Time	<0.55
Switching Cycle	≥12,500
Life time	Up to 25,000 hours
Lamp Base	E26 E27 B22
Dimensions	Dia.=64mm
	L=140mm




(EROHS ErP SAA . C. FC

Related Products

Model No.	Bulb Type	Glass Color	Wattage(W)	Luminous Flux(lm)
37721	ST58 Amber or Sm	Amber or Smoke	2W	160lm ± 10%
37722			4W	320lm ± 10%
37723			6W	450lm ± 10%
37831	ST58	Amber or Smoke	2W	160lm ± 10%
37832			4W	320lm ± 10%
37833			6W	450lm ± 10%
37731	- ST64	Amber or Smoke	2W	160lm ± 10%
37732			4W	320lm ± 10%
37821	ST64	Amber or Smoke	2W	160lm ± 10%
37822			4W	320lm ± 10%
37823			6W	450lm ± 10%



Product Test Report

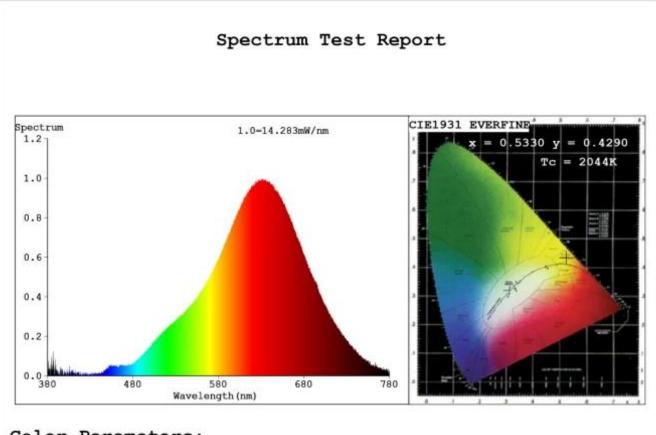

Color Parameters:


Chromaticity Coordinate:x=0.5330 y=0.4290/u'=0.3011 v'=0.5452 Tc=2044K Dominant WL:Ld =587.2nm Purity=88.8% Red Ratio:R=35.2% Peak WL:Lp=632.0nm HWL:Lhd=120.0nm Render Index:Ra=89.6 R1 =89 R2 =94 R3 =97 R4 =89 R5 =89 R6 =95 R7 =90 R8 =75 R9 =47 R10=86 R11=90 R12=86 R13=90 R14=98 R15=82 Photo Parameters: Flux = 563.6 lm Eff. : 94.73 lm/W Fe = 2.206 W Electrical parameters:

V = 230.0 V I = 0.02900 A P = 5.950 W PF = 0.8850

LEVEL:OUT WHITE:OUT

Status: Integral T = 633 ms Ip = 49717 (76%)



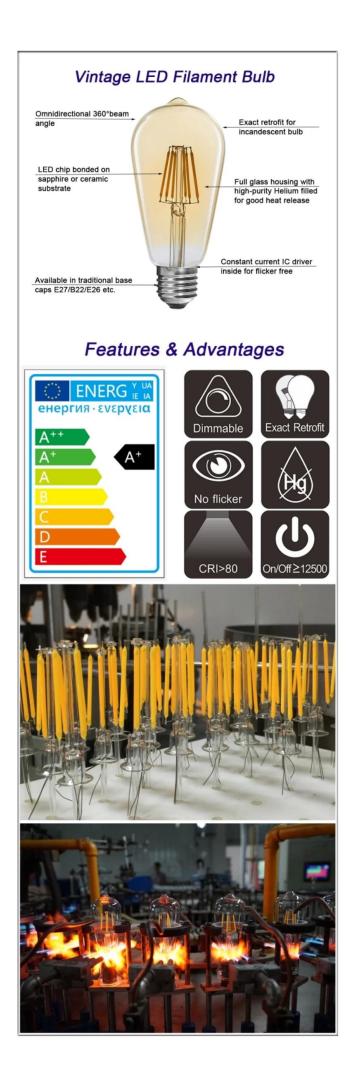



² 360° beam angle delivers a even distribution of light without creating shadows

 $^2\,$ Up to 85% energy saving with new LED filament technology: 8W LED equivalent to 60W incandescent bulb

- ² Retrofit size and classic vintage design for traditional incandescent look and feel
- ² No flicker to protect human eyes
- ² High CRI > 80 ensures more vivid and natural light
- ² Environment friendly: No lead or mercury and No UV or IR Radiation
- ² Long life time lasts up to 10 years (4 hours use per day)
- ² Dimmable smoothly from 10%-100%
- ² Two years limited warranty based on average daily use of 4 hours
- ² With certification of CE LVD EMC RoHS ErP SAA ETL

Papplication


Vintage LED Filament bulbs ST64 provides a artistic and vintage appeal to any wall sconces, chandelier, pendant light, barn beam lights,

industrial lamps or outdoor light. It is perfect to give off a warm amber light in showroom, art-room, museums, bar, bistro, coffee shop, optical shop,restaurant, hotel, living room, dining room, bedroom, kitchen, etc.

Operation and maintenance

- ² Ambient temperature range -20° C to 40°C.
- ² Store and use the bulb/lamp the same way as traditional bulb/lamp.
- ² Check your fixtures are properly wired and don't deliver voltage spike to bulb/lamp causing overheating/failure.
- ² Bulb/lamp should be kept free from contamination.
- ² Good condition of the lamp-holder contacts is important to ensure proper operation of bulb/lamp.
- ² Switch off mains supply before installing or removing bulb/lamp.
- ² Ensure bulb/lamp is cool before removing.

Warning: Discontinue use if damaged.

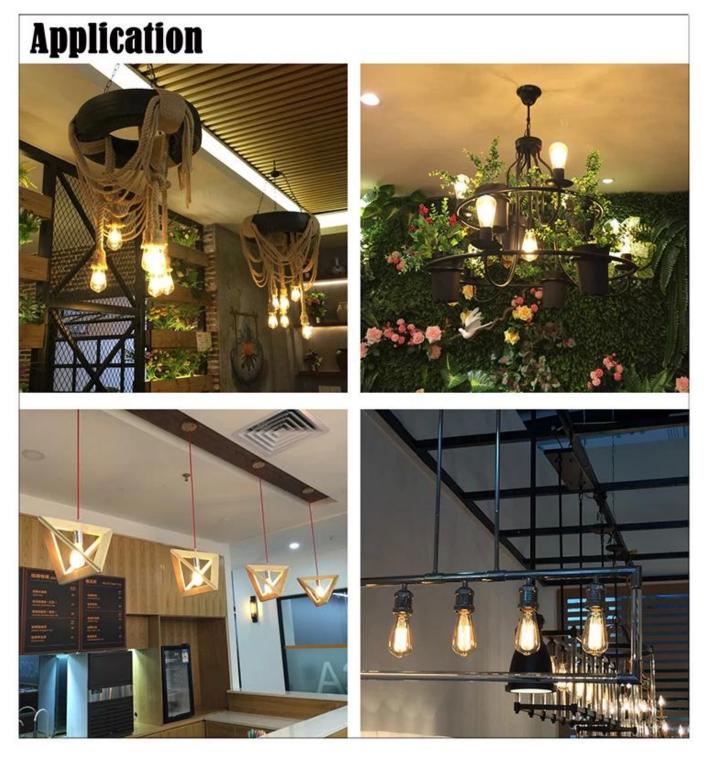



1 pc led bulb per color box, then 50pcs packed in one standard export carton.(1pc/color box,50pcs/carton)

😵 Return Policy

We provide a free TWO YEARS LIMITED WARRANTY based on average daily use of 4 hours for this item. Should returns be required:

Step 1) Contact us with this website email.

Step 2) Provide as much detail as possible about the problem you are having.

Step 3) Authorization to return the item will be issued.

Step 4) Return the item for the agreed replacement or refund.



Q1.Are you a manufacturer?

A1: Yes, we are an experienced manufacturer with our own molds and production lines.

Q2.How about quality of products?

A2: Our technicians and QC teams test the products one by one using aging line, professional devices and instruments to ensure the quality for all products.

Q3.How about price? A3: We are a manufacturer and always offer our customers the most competitive prices.

Q4.How to place an order?

A4: Contact with online service, or sent email to us directly, we will reply to you with product price, specifications, packing etc. soon. Thank you.

Q5.May I buy samples from you?

A5: Yes! You are welcome to place sample order to test our superior quality and service, mixed samples are acceptable.

Q6.Can I visit your factory?

A6: Yes, welcome to visit our factory at your convenient time.

Q7.How can I make OEM or ODM orders?

A7: We have different print processing for different OEM/ODM orders. Please contact us with online service or send email to us directly.

Q8. How should I pay for my orders?

A8: You can pay by T/T, L/C at sight would be available for qualified bank and MOQ required for each order.

Sector Logistics

Sample order ship by DHL, UPS, FedEx, TNT, EMS etc. For mass order delivery, can be optional with terms of Exwork, FOB, CNF, CIF by air or by sea based on the buyer's forwarder or ours



Certifications



💱 Exhibition & Fair



Factory Show

