



Product Description

INNOLITE Slim PH Style LED Floodlight can give off a diffuse and versatile lighting effect with innovative exterior design. And with superior optical lens of strong transmittance and hard PC material, this 60 degree beam angle lamp will focus on the areas which lighting needs with maximum efficiency. It can be better integrated with the architectural landscape, perfectly fusion of application environment.

With thickened die-cast aluminum body, It not only ensure the strength of the floodlight, but also convective the design of the new streamline thermal which gets excellent heat dissipation and extend the life of the lamp.

Product sealing is perfect. With IP rating IP65, Innolite LED Floodlight is suitable for outdoor lighting, gardens, squares, billboards, factories, docks, stadiums, etc. It comes with adjustable metal bracket to adjust the different angles and can be installed in the ceiling, walls, ground and other locations.



Product Specification

Model No.	33644
Power	50W
Luminous Efficiency	110 lm/w
LED Type	SMD
Input Voltage	190-260VAC or 85-265VAC
Material of case	PVC or Aluminum
Color Temp (CCT)	2700K - 6500K
Energy Efficiency Class	A+
Beam Angle	60 degree
Color Rendering Index	≥80 Ra
Power factor	≥0.95
Start Time	<0.5S
Switching Cycle	≥12,500
Life time	Up to 50,000 hours
Temp. of Operation	-30~+50°C
IP Rating	IP65
Dimensions	270x200x35mm



Product Certificates

CE RoHS



Related Products

Model No.	Product Name	Wattage	Material of Case	Luminous Efficiency	Dimensions
33642	LED Floodlights Slim PH Style	20W	PVC or Aluminum	110 lm/w	160x120x35 mm
33643		30W	PVC or Aluminum	110 lm/w	195x140x35mm
33645		70W	Aluminum	110 lm/w	316x232x40mm
33646		100W	Aluminum	110 lm/w	316x232x40 mm




Product show

LED Floodlight



Waterproof

Advanced Heat sink

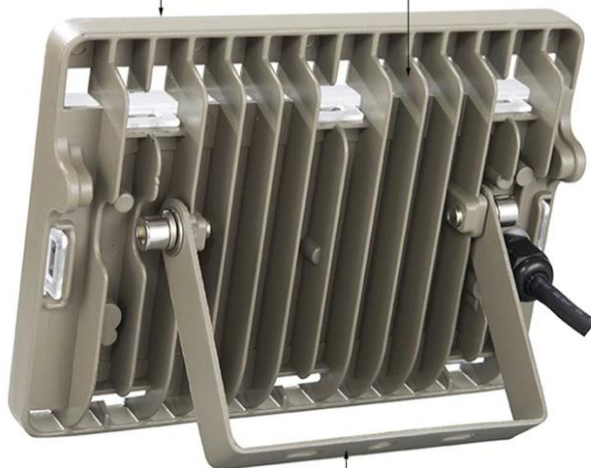

Stable Lamp bracket

Feature & Advantages





Advantages

- ² Use the most efficiency integrated aluminum alloy, the completed lamp can work above 50,000hrs
- ² Heat sink of different sizes from 20-100W for varied lighting requirement.
- ² Protect Rate: IP65 for indoor and outdoor lighting.
- ² No flicker to protect human eyes
- ² No buzzing and instant on
- ² High CRI > 80 ensures more vivid and natural light
- ² Environment friendly: No lead or mercury and No UV or IR Radiation
- ² Long life time lasts up to 17 years (4 hours use per day)
- ² Two years limited warranty based on average daily use of 4 hours
- ² With certification of CE RoHS, etc.



Application

Innolite slim PH Style LED Floodlight 50W can provide you a diffuse and versatile light effect with slim conventional fixture. It is widely used in garden, building facades, bridges, tunnels, stadium, billboards, park sculpture, toll station, gas station, factory, warehouse, large supermarket, exhibition hall, etc

Application



Safety Information

- ² Working temperature range -30° C to 50°C
- ² Check the lamp before installation, if there is any damage caused during transportation, do not install.
- ² Maintenance should be carried out by person who is familiar with the tube only.
- ² Do not place any objects on the lamp.
- ² Keep the lamp away from flame or high temperature objects.
- ² Only for indoor use.
- ² Only replace with same type of LED tube. Risk of electrical shock.
- ² If the glass lamp tube is broken, the lamp must be disposed immediately.


Maintenance Notes

- ² Disconnect lamp from power supply before any maintenance.
- ² Clean luminaires with dry cloth.
- ² Do not clean the lamp with corrosive chemicals.

Warning: Discontinue use if damaged.

Package

1 pc LED bulb per color box, then 20pcs packed in one standard export carton.(1pc/color box, 20pcs/carton)

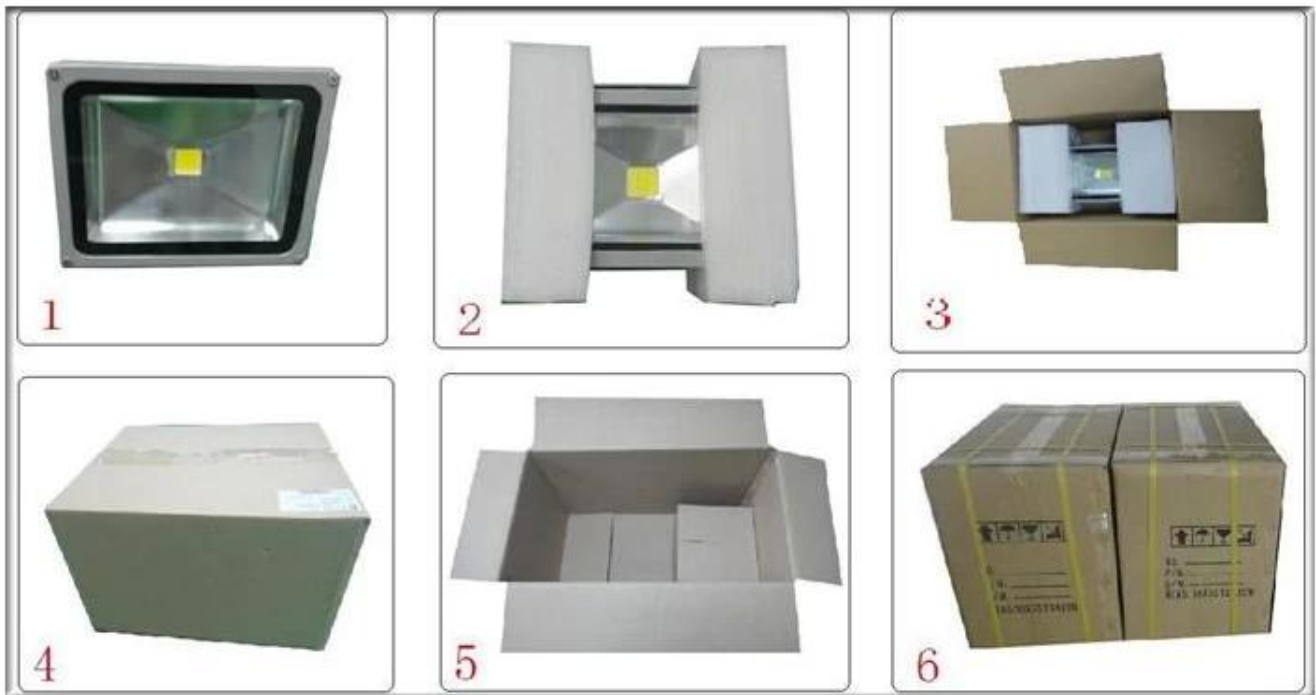

Return Policy

We provide a free TWO YEARS LIMITED WARRANTY based on average daily use of 4 hours for this item.

Should returns be required:

- Step 1) Contact us with this website email.
- Step 2) Provide as much detail as possible about the problem you are having.
- Step 3) Authorization to return the item will be issued.
- Step 4) Return the item for the agreed replacement or refund.



FAQ

Q1.Are you a manufacturer?

A1: Yes, we are an experienced manufacturer with our own molds and production lines.

Q2.How about quality of products?

A2: Our technicians and QC teams test the products one by one using aging line, professional devices and instruments to ensure the quality for all products.

Q3.How about price?

A3: We are a manufacturer and always offer our customers the most competitive prices.

Q4.How to place an order?

A4: Contact with online service, or sent email to us directly, we will reply to you with product price, specifications, packing etc. soon. Thank you.

Q5.May I buy samples from you?

A5: Yes! You are welcome to place sample order to test our superior quality and service, mixed samples are acceptable.

Q6.Can I visit your factory?

A6: Yes, welcome to visit our factory at your convenient time.

Q7.How can I make OEM or ODM orders?

A7: We have different print processing for different OEM/ODM orders. Please contact us with online service or send email to us directly.

Q8. How should I pay for my orders?

A8: You can pay by T/T, L/C at sight would be available for qualified bank and MOQ required for each order.

Logistics

Sample order ship by DHL, UPS, FedEx, TNT, EMS etc

For mass order delivery, can be optional with terms of Exwork, FOB, CNF, CIF by air or by sea based on the buyer's forwarder or ours



Certifications



Exhibition & Fair



Factory Show

