

Ürün Açıklaması:

Gömme bir seçenek olmadığında ve düşmüş bir tavanınız olmadığında, INNOLITE 18W yuvarlak yüzey LED panel downlight sizin için mükemmel bir seçimdir. Beton veya alçı levha gibi herhangi bir düz yüzeye doğrudan monte etmek için gerekli tüm bağlantı parçaları ve braketler ile birlikte gelir. Bu arada aynı zamanda bir sürücü / transformatör ile geliyor, bu yüzden tüm yapmanız gereken 240V veya 110V şebekenize takmak.

40mm'lik bir derinlikle, sürücüyü / trafoyu gizleyebilirsiniz, böylece size düzgün bir kurulum sağlamak için görüş alanı dışındadır. Enerji verimliliği sınıfı A + ile, geleneksel CFL ışıklarından daha fazla enerji tasarrufu sağlar. Ve geniş bir ışın açısı 120 derece ve her watt başına 80lm ile, genellikle ofis, konferans salonu, okul, vb aydınlatma kullanılır.

Ürün özellikleri:

Model numarası.	31227
Güç	18 W
Binaların	Beyaz veya saten nikel
Işık akısı	1200 lm $\pm$ % 10
Montaj seçeneği	Yüzey
Giriş gerilimi	175-265VAC veya 85-265VAC
Güç faktörü	& Gt; 0.50
Renk Sıcaklığı (CCT)	2700K - 6500K
Enerji Verimliliği Etiket	A +
Işın açısı	120 °
Sıcaklık. Operasyon	-20 ~ + 40 ° C
Başlama zamanı	& Lt; 0.5S
Anahtarlama Döngüsü	$\geq$ 12,500
Ömür	25,000 saate kadar
boyutlar	Ø225 mm

Ürün Sertifikaları:


CE RoHS ErP SAA  FC

İlgili ürünler

Model numarası.	vat miktarı	Işık akısı	boyutlar	Montaj seçeneği
31223	6W	400 lm $\pm$ % 10	Ø120 mm	Yüzey
31225	12W	800 lm $\pm$ % 10	Ø170 mm	Yüzey
31229	24W	1600 lm $\pm$ % 10	Ø300 mm	Yüzey

Ürün Test Raporu

Spectrum Test Report

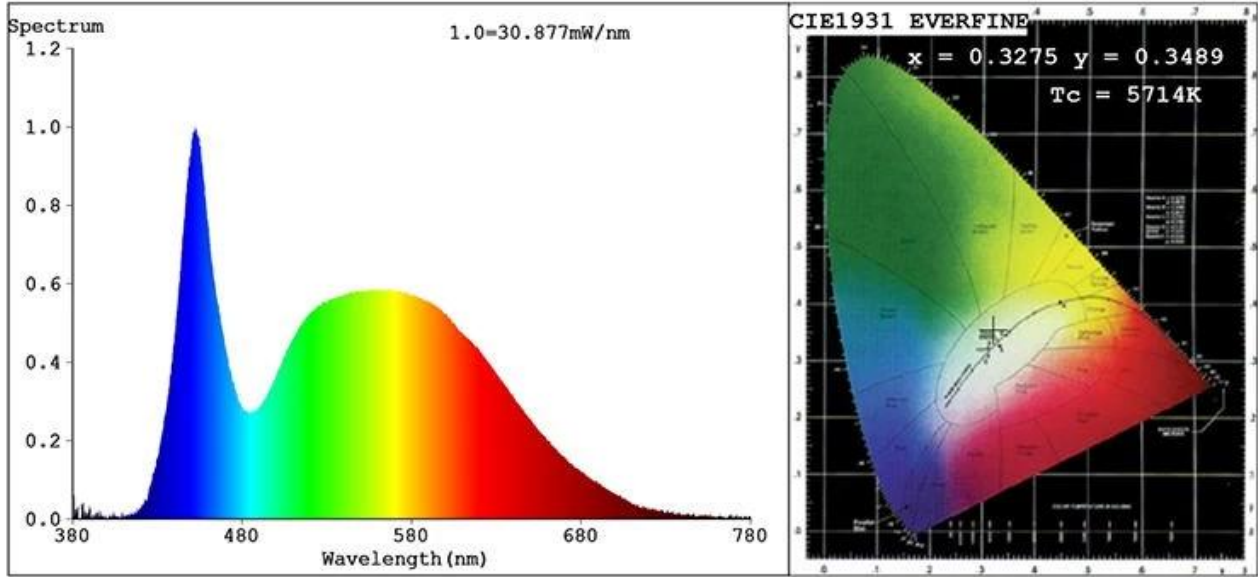

Color Parameters:

Chromaticity Coordinate: $x=0.3275$ $y=0.3489$ $u'=0.2005$ $v'=0.4807$

$T_c=5714K$ Dominant WL:Ld =530.1nm Purity=3.3%

Red Ratio:R=15.2% Peak WL:Lp=452.4nm HWL:Lhd=26.6nm

Render Index:Ra=82.1

R1 =79	R2 =87	R3 =92	R4 =81	R5 =80	R6 =82	R7 =88	
R8 =68	R9 =5	R10=68	R11=79	R12=57	R13=81	R14=96	R15=74

Photo Parameters:

Flux = 1291 lm Eff. : 68.67 lm/W Fe = 4.019 W

Electrical parameters:

V = 230.0 V I = 0.08500 A P = 18.80 W PF = 0.9630

LEVEL:OUT WHITE:OUT

Status: Integral T = 468 ms Ip = 52922 (81%)

Ürün gösterimi

Round Surface LED Panel lights



Lamp body



High quality
smd2835 led



Interface
easy to install



LED Driver



Features & Advantages

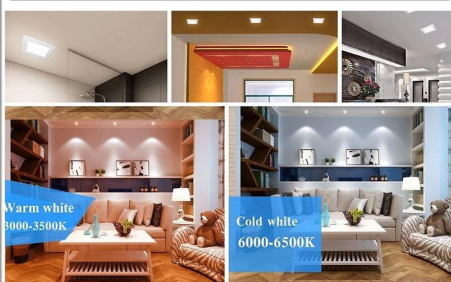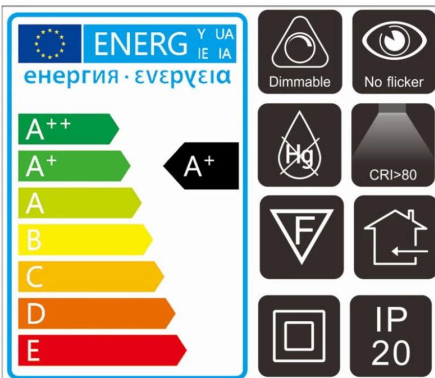

Avantajları:

120 120 derece geniş ışın açısı ile

Die Döküm alüminyum gövde ile

□Dimmable

Labor işgücü maliyetlerinden tasarruf etmek için kolay ve hızlı kurulum

Humanİnsan gözlerini korumak için titreşimsiz yumuşak ışık

□Yüksek CRI & gt; 80 daha canlı ve doğal ışık sağlar

FriendlyÇevre dostu: Hiçbir kurşun veya cıva ve UV veya IR Radyasyon yok

□Uzun ömür süresi 10 yıla kadar uzar (günde 4 saat kullanım)

Average Dört saatlik ortalama günlük kullanıma dayalı iki yıllık sınırlı garanti

CE RoHS, vb ile belgelendirme

Uygulama

INNOLITE yuvarlak yüzey LED panel ışığı 18W yüzeye montaj seçeneğiniz için daha iyi bir seçimdir. Bu yaygın oturma odası, yatak odası, mutfak, yemek odası, dolap, garaj, konferans, toplantı salonu, gösteri odası, vitrin, okul, üniversite, hastane, otel, restoran, süpermarket, mağaza vb.

Operasyon ve bakım

□Orta sıcaklık aralığı -20 ° C ila 40 ° C.

Bulb Ampul / lambayı geleneksel ampul / lamba ile aynı şekilde depolayın ve kullanın.

FixCihazınızın armatürlerinin uygun şekilde kablolandığından ve fazla ısınmaya / arızaya neden olarak ampul / lambaya voltaj artışı vermediğinden emin olun.

□Bulb / lamba kirlenmemelidir.

Lamp Lamba tutucu kontaklarının iyi durumda olması, ampul / lambanın düzgün çalışmasını sağlamak için önemlidir.

Ampulü / lambayı takmadan veya çıkarmadan önce elektrik şebekesini kapatın.

□Eğitimden önce ampul / lamba soğumalıdır.

Uyarı: Hasar varsa kullanımı durdurun.

Application



Bedroom



Living room



Closet




Utility room

Paket:


Renk kutusu başına 1 adet LED ampul, daha sonra 20 adet bir standart ihracat karton paketlenmiş. (1 adet / renk kutusu, 20 adet / karton)

Installation Diagram


01 Fix the bracket into the ceiling




02 Connect to AC 110-240V

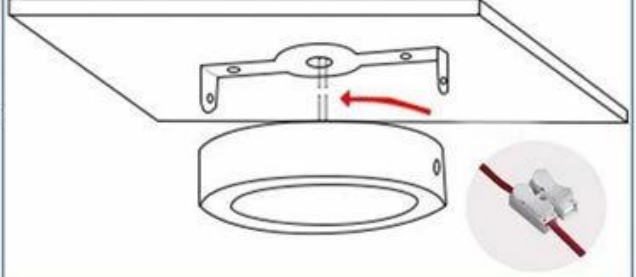

03 Fix the light on the bracket

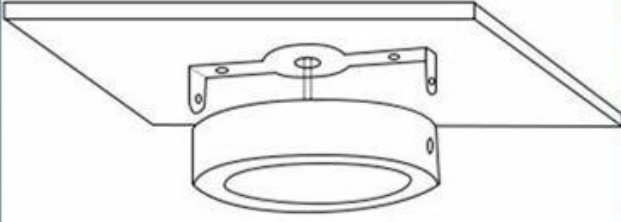

03 Secure with screws

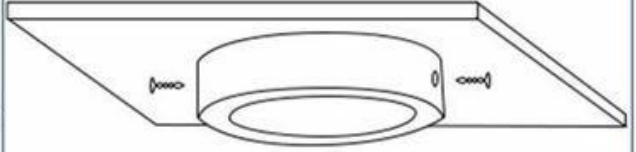

İade politikası:

Bu ürün için 4 saatlik ortalama günlük kullanıma dayalı olarak ücretsiz bir TWO YILLAR SINIRLI GARANTİ sağlıyoruz.

İade gerekli olmalı:

Adım 1) Bu web sitesi e-postası ile bize ulaşın.

Adım 2) yaşadığınız problem hakkında mümkün olduğunca fazla bilgi verin.

Adım 3) Maddeyi iade yetkisi verilecektir.

Adım 4) Kabul edilen değiştirme veya geri ödeme için öğeyi iade edin.

SSS:

Q1.Ayrıca üretici misiniz?

A1: Evet, kendi kalıplarımız ve üretim hatlarımızla deneyimli bir üreticiyiz.

Q2.How ürün kalitesi hakkında?

A2: Teknisyenlerimiz ve QC ekiplerimiz, tüm ürünler için kaliteyi garantilemek için ürünleri yaşlanma çizgisi, profesyonel cihazlar ve enstrümanlar kullanarak tek tek test eder.

Q3.How fiyat hakkında?

A3: Biz üretici ve her zaman müşterilerimize en rekabetçi fiyatlar sunuyoruz.

Q4.How sipariş vermek için?

A4: Çevrimiçi hizmetle iletişime geçin veya doğrudan bize e-posta gönderin; size yakında ürün fiyat, teknik özellik, ambalaj vb. ile cevap vereceğiz. Teşekkür ederim.

Q5. Ben sizden örnekler alırmısınız?

A5: Evet! Bizim üstün kalite ve hizmet test etmek için örnek sipariş verebilirsiniz, karışık örnekleri kabul edilebilir.

Q6.Can senin fabrika ziyaret edebilir miyim?

A6: Evet, uygun zamanda fabrikamızı ziyaret etmenizi bekliyoruz.

Q7.How OEM veya ODM siparişleri yapabilirim?

A7: Farklı OEM / ODM siparişleri için farklı baskı işleme var. Lütfen çevrimiçi hizmet ile bizimle iletişime geçin veya doğrudan bize e-posta gönderin.

S8. Siparişlerim için nasıl ödeme yapmalıyım?

A8: T / T, L / C ile ödeme yapabilirsiniz her sipariş için gerekli nitelikli banka ve ADEDI için mevcut olacaktır.

Lojistik:

DHL, UPS, FedEx, TNT, EMS vb tarafından örnek sipariş gemi

Toplu sipariş teslimi için, Exwork, FOB, CNF, CIF şartlarına göre hava yoluyla veya alıcının nakliyesine veya denizciliğimize göre deniz yoluyla isteğe bağlı olabilir.



Sertifikalar

ATTESTATION OF CONFORMITY

Issued to: Innotech Industrial Co., Ltd
#1201, 12/F., Arbus building, NO.6007, Shenman Road, Shenzhen, China

For the product: Self-Illuminated LED-strip

Type Model: --

(Details refer to model list in attachment of test report)

Rated: 220-240 Vac, 50 Hz (Details refer to model list in attachment of test report)

Manufactured by: Kalin Lighting Co., Ltd
FOOXIN INDUSTRIAL DISTRICT, DALANG TOWN, DONGGUANG CITY,
GUANGDONG, CHINA

Requirements: EN 62560-2012 + A1:2015
EN 62471:2008
EN 62493:2010
IEC TR 62778:2014

This Attestation is granted on account of an examination by DEKRA, the results of which are laid down in a confidential file no. 4331093.50 + 4331093.51 + 4331094.51.

This Attestation implies that the examined items are in accordance with the standards designated under the Low Voltage Directive (LVD) 2014/35/EU.

The examination has been carried out on one single specimen or several specimens of the product, submitted by the manufacturer. The attestation does not include an assessment of the manufacturer's production. Conformity of this production with the specimen tested by DEKRA is not the responsibility of DEKRA.

Guangzhou, 18 August 2016

Number: 4331093.01ADC

DEKRA Testing and Certification (Shanghai) Ltd.,
Guangzhou-branch



Rosa Zhou
Certification Manager

© Integral publication of this attestation and adjoining reports is allowed

DEKRA Testing and Certification (Shanghai) Ltd., Guangzhou branch
Block A3, No 2 Qiyun Road, Science City, Guangzhou, Hi-Tech Industrial Dev. Zone, 510663 Guangzhou, China
T +86 20 6681 2000 F +86 20 6681 2001 www.dekra-certification.com

				
Test Report		Number: LCZC16609123-E	Date: May 14, 2016	Page 1 of 30
Applicant: INNOTECH INDUSTRIAL COMPANY LIMITED				
Address: #1201, 12/F., Anhui Building, No. 6007, Shennan Road, Shenzhen, China				
Date of Received: May 12, 2016 & May 26, 2016 & Jun. 06, 2016				
Testing Period: From May 12, 2016 to Jun. 08, 2016				
Report on the submitted sample to be:				
Item Name: LED Lamp				
Model No.: KLL917P-2.5, KLL917P-3, KLL438P-3, KLL445P-4, KLL445S-4, KLL438P-5, KLL769P-4, KLL790P-3, KLL445G-3, KLL769G-4, KLL795J-B, KLL53-6, KLL434F-4, KLL525HF, KLL759F, KLL760F, KLL760F, KLL730F, GU10 COB, KLLUP-520, KLL425P-4, KLL445F-4, KLL795F-6				
Ref. Model No.: See Appendix 1				
Test Request:		Conclusion:		
As per applicant requirement, According to European RoHS directive 2011/65/EU and it's Amendment, Test on submitted samples				
— Lead (Pb), Cadmium (Cd), Mercury (Hg), Hexavalent Chromium (Cr(VI)) and Polychlorinated Biphenyls & Polychlorinated Biphenyl Ethers (PBBs & PBDEs) content.				
Pass				
Please see the next page(s) for details.				
Signed for and on behalf of LCTECH				
Reviewed by		Approved by		
				
Ken Lu Project Engineer		Robert Lu Technical Manager		
This test report shall not be reproduced except in full, without written approval of LCTECH.				
LCTECH (Zhejiang) Testing Service Co., Ltd.				
2/F, Technology and Enterprise Development Center, Guangnan Road, Xiaolan, Guangdong, China. 528415				
Tel: (86-760) 2283-3388 Fax: (86-760) 2283-3389 http://www.lctest.com Security code: 2004				

Attestation of Conformity

No. N8A 17 05 79128 002



Product Service

Holder of Certificate: **KALIN LIGHTING CO.,LTD**
 From Manufacturer: Daqing Tian
 521309 Dongguan City, Guangdong
 PEOPLE'S REPUBLIC OF CHINA

Product: **LED Lamps**
(LED Bulbs)

Model(s):

KL12A180F-40; KL12A180F-40; KL12A180F-40; KL12A180F-40;
 KL12T80F-40; KL12T80F-40; KL12T80F-40; KL12T80F-40;
 KL12A180F-40; KL12A180F-40; KL12T80F-40; KL12T80F-40;
 KL12T80F-40; KL12T80F-40; KL12T80F-40; KL12T80F-40;
 KL12P80R-8; KL12P80R-8; KL12P80R-8; KL12P80R-8;
 KL12P80R-8; KL12P80R-8; KL12P80R-8; KL12P80R-8;
 KL12A180R-40; KL12P80R-8; KL12A180R-40; KL12P80R-8;
 KL12A180R-40; KL12P80R-8; KL12T80F-40; KL12T80F-40

Parameters:

Rated Voltage: 220-240VAC Rated Frequency: 50/60Hz Rated Power: See page 2 for details Lamp Caps: See page 2 for details Blue Light Risk Group: R00	EN 62562:2014:2015 EN 62493:2015
---	--

Tested according to:

EN 62562:2014:2015
 EN 62493:2015

This Attestation of Conformity is issued on a voluntary basis according to the Low Voltage Directive 2014/34/EU relating to electrical equipment designed for use with certain voltage limits. It confirms that the listed conformity marks and the principal performance requirements of the directive and is based on the technical specifications applicable at the time of issuance. It refers only to the particular sample submitted for testing and certification. See also notes overleaf.

Test report no.: 08140712401




Date: 2017-05-18 (Taylor Yee)

CE After preparation of the necessary technical documentation as well as the EU declaration of conformity the required CE marking can be affixed on the product. The declaration of conformity is issued under sole responsibility of the manufacturer. Other relevant EU-directives have to be observed.

Page 1 of 2

TÜV SÜD Product Service GmbH · Zertifikatsstelle · Rutenstrasse 81 · 8033 München, Germany

	
Certificate of Suitability	
Certificate No.:	SAA116819
Certificate Holder:	Kaixin Lighting Co. Ltd Foshan Industrial District, Dalong Town, Dongguan City, Guangdong, 517192 P.R. China
Class Description:	Non-Declared
Product Description:	LED Lamp
Brand Name:	Kaixin Lighting Co.,Ltd
Model No.:	KLX-3000-S
Markings:	220~240V~ 50Hz SW E14
Standard:	AS/NZS IEC 62560:2014
Conditions:	Nil
Certification Mark:	SAA116819 or RCH
Date of Issue:	23 August 2016
Date of Expiry:	23 August 2021


For and on Behalf of
SAA Approvals Pty Ltd



SAA Approvals Pty Ltd is accredited by JAS-ANZ under ISO/IEC 17067 in accordance with the SAA Approvals Certification Program (certification scheme) and is authorised to issue Certificates of Suitability with standardised text. Groups using the RCH as a representation of the AS/NZS 6147 applicable to the article must be labelled.

For full General Conditions see early issue Certificate or visit www.saaapprovals.com.au



JAS-ANZ
Certified



SAA APPROVALS
CERTIFIED

Issued: 23-08-16 16:03:11

[illegible]

Fabrika gösterisi

Factory Show



Automatic SMT



Welding Line



Automatic Bulb Sealing Line



Driver Production Line



Assembly Line



Automatic Base Mounting Line



Automatic Aging Line



Life Time Testing



R&D Department



Office



Show Room



Factory Building

Sergi & adil

Exhibition & Fair

