



## Product Description

Bring a little sparkle in your home garden! INNOLITE® LED String Lights will glitter like gemstones in the night on your balcony, windowsill, terrace, and in your yard of living room during wedding, anniversaries or holiday celebration.

It is best suited for the romantic and celebrative moods no matter indoor or outdoor.



## Product Specification

Model No.	34121
Lamp Power	1.5W
Max Power	1500W
Voltage	220-240VAC
Product Style	EU Style
Size	21 Feet(6.04M) or Customized
IP Rating	IP65 for Cable and Socket, IP44 for Plug
Material	PVC or Rubber for Cable, PVC for socket,100% copper for wire
Wire Gauge	2C or 3C, 0.5mm2, 0.75mm2, 1.0mm2, 1.5mm2
Socket Type	E27 Suspended or Fixed Socket
Quantity of Socket	9pcs or Customized
Plug Type	VDE 2 Pin or 3 Pin Waterproof Connected Plug
Connection	Multiple Strings Connectable
Color Temp (CCT)	1800-6500K, Red, Green, Blue, Yellow
Power factor	≥0.5
Start Time	<0.5S
Switching Cycle	≥12,500
Life time	Up to 25,000 hours



## Product Certificates

CE RoHS ErP SAA  FC




## Related Products

Model No.	Wattage(W)	Product Style	Voltage	Max Power	CCT
34131	1.5W	US Style	110-130VAC	1500W	1800-6500K, Red, Green, Blue, Yellow



## Product Test Report

## Spectrum Test Report

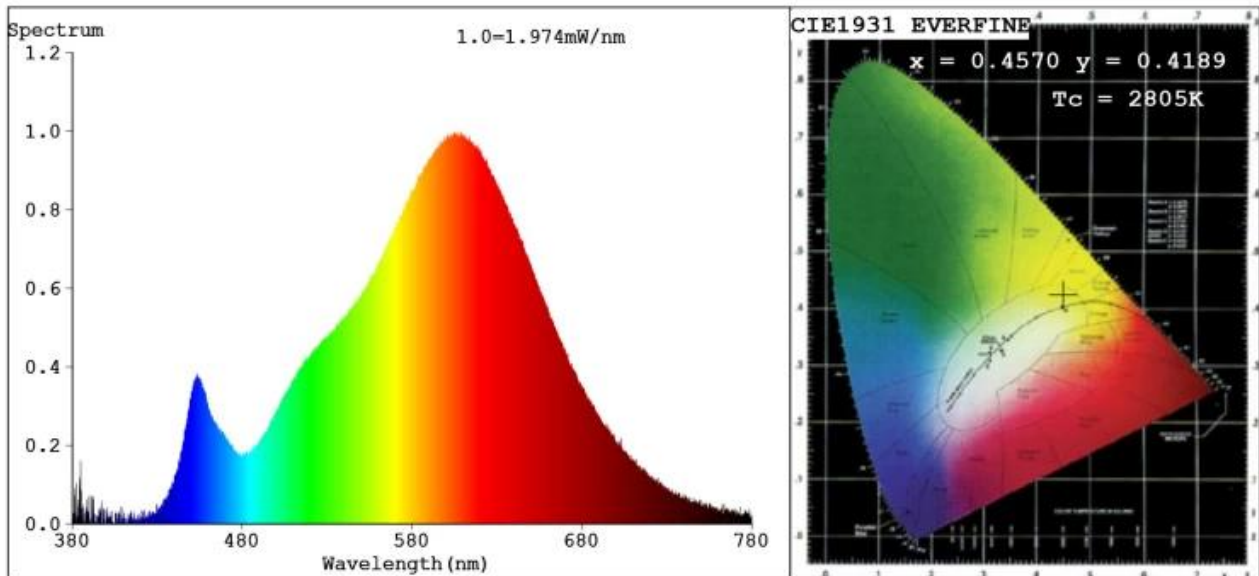

### Color Parameters:

Chromaticity Coordinate:  $x=0.4570$   $y=0.4189$   $u'=0.2570$   $v'=0.5300$

$T_c=2805K$  Dominant WL:  $L_d = 582.7nm$  Purity=62.9%

Red Ratio:  $R=25.9\%$  Peak WL:  $L_p=607.3nm$  HWL:  $L_{hd}=128.9nm$

Render Index:  $R_a=83.2$

$R1 = 81$   $R2 = 91$   $R3 = 98$   $R4 = 81$   $R5 = 81$   $R6 = 89$   $R7 = 84$

$R8 = 61$   $R9 = 13$   $R10 = 79$   $R11 = 80$   $R12 = 69$   $R13 = 83$   $R14 = 99$   $R15 = 74$

### Photo Parameters:

Flux = 104.9 lm Eff. : 57.31 lm/W Fe = 327.1 mW

### Electrical parameters:

$V = 230.0 V$   $I = 0.01500 A$   $P = 1.830 W$  PF = 0.5220

LEVEL:OUT WHITE:OUT

Status: Integral  $T = 3768 ms$   $I_p = 43987 (67\%)$



Product show



This luminaire is compatible with bulbs of the energy classes:

The luminaire is sold with a bulb of the energy class:

**A<sup>+</sup>**



Size  
**CABLE**  
FEET

Customized

Includable  
**LED**  
BULBS

E26/E27 Sockets

Impact Resistant



Durable Acrylic

Connect Multiple  
Strings<sup>(1)</sup>



Maxi 1500W

Year-Round<sup>(2)</sup>



Indoor & outdoor



## Advantages


- <sup>2</sup> Customized size and you can choose the cable feet you need
- <sup>2</sup> Included 9 LED bulbs with E26 or E27 sockets
- <sup>2</sup> Durable acrylic for Impact Resistant
- <sup>2</sup> Connect Multiple strings: Maxi 1500W
- <sup>2</sup> Environment friendly: No lead or mercury and No UV or IR Radiation
- <sup>2</sup> Long life time lasts up to 10 years (4 hours use per day)
- <sup>2</sup> Waterproof Indoor or outdoor is available
- <sup>2</sup> Two years limited warranty based on average daily use of 4 hours
- <sup>2</sup> With certification of CE RoHS ErP SAA



## Application

Innolite LED Crystal Bubble Ball String lights 1.5W will create a beautiful backyard atmosphere where you can sit back, relax, and enjoy the evening. These vintage Edison bulb string lights with exposed filaments give off a warm, nostalgic glow so that you can come home after a busy day and enjoy your very own retreat. These string lights are bright enough to dine under without a glare so that you can enjoy your dinner outside on a nice evening.



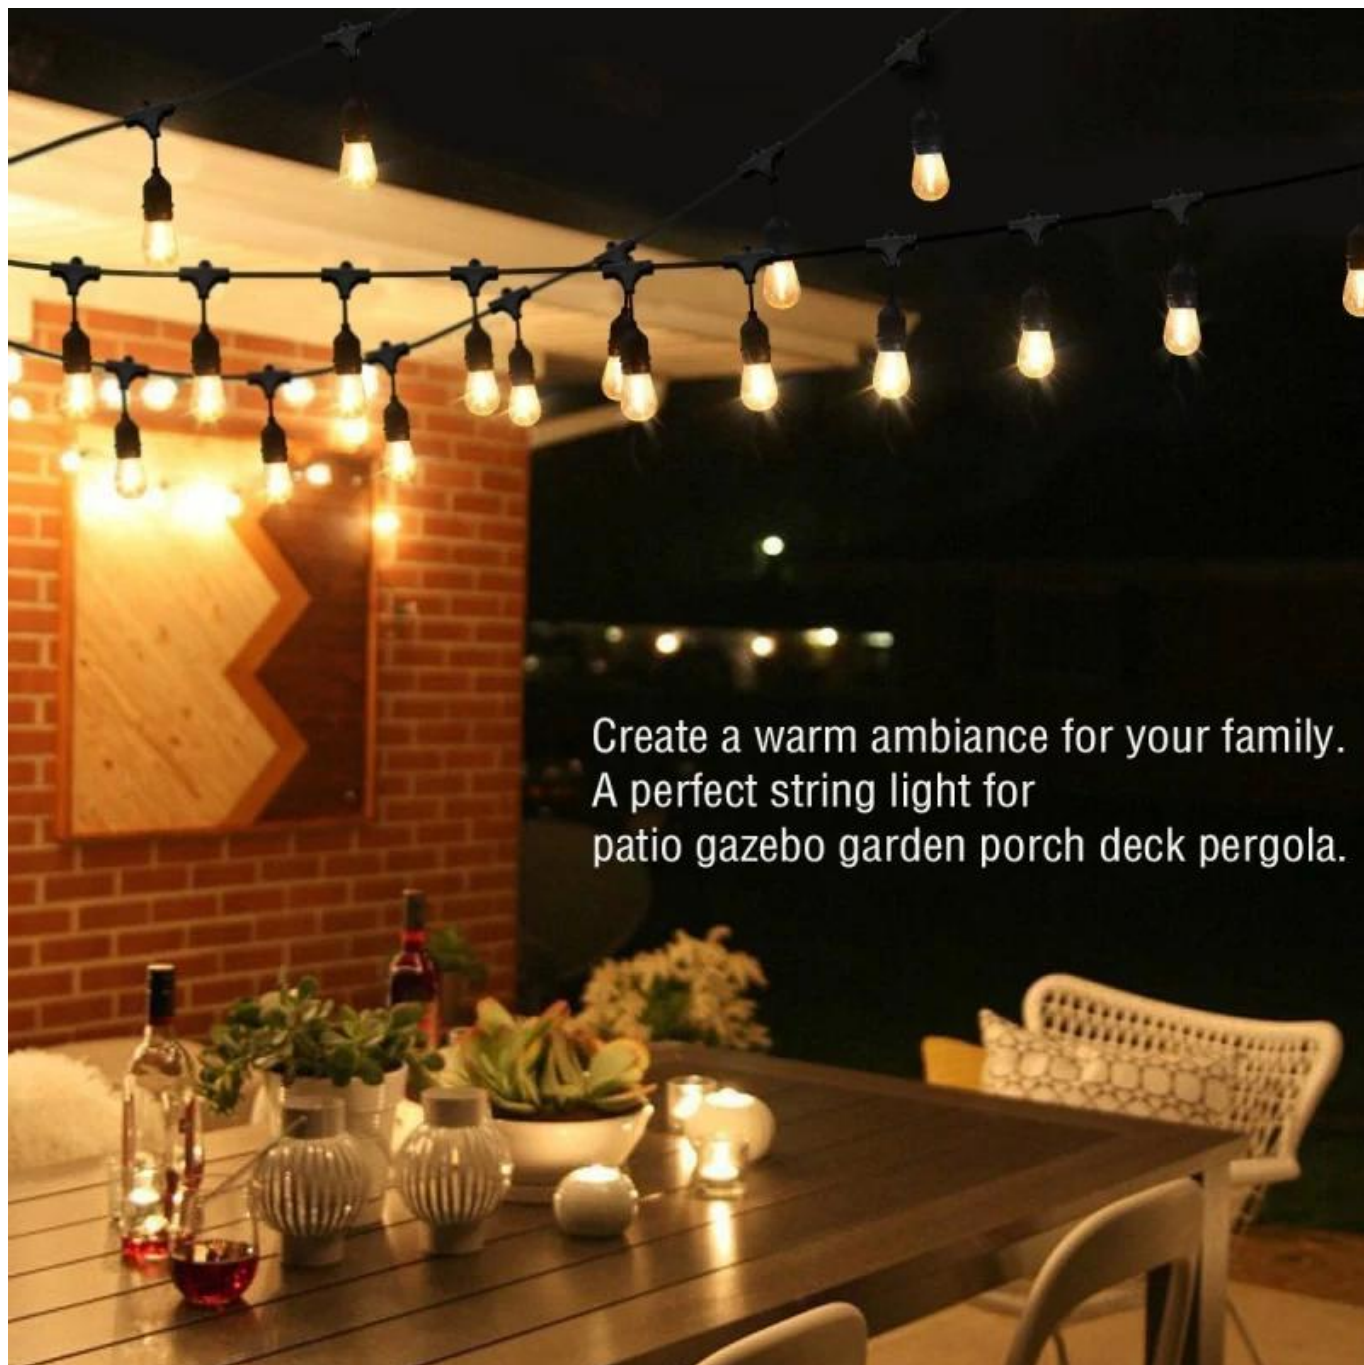

Create a warm ambiance for your family.  
A perfect string light for  
patio gazebo garden porch deck pergola.



### **Operation and maintenance**

- <sup>2</sup> Ambient temperature range -20° C to 85°C, indoor or outdoor.
- <sup>2</sup> Store and use the bulb/lamp the same way as traditional bulb/lamp.
- <sup>2</sup> Check your fixtures are properly wired and don't deliver voltage spike to bulb/lamp causing overheating/failure.
- <sup>2</sup> Bulb/lamp should be kept free from contamination.
- <sup>2</sup> Good condition of the lamp-holder contacts is important to ensure proper operation of bulb/lamp.
- <sup>2</sup> Switch off mains supply before installing or removing bulb/lamp.
- <sup>2</sup> Ensure bulb/lamp is cool before removing.

**Warning:** Discontinue use if damaged.



## Package

1 pc led bulb per color box, then 100pcs packed in one standard export carton.(1pc/color box,100pcs/carton)



## Return Policy

We provide a free TWO YEARS LIMITED WARRANTY based on average daily use of 4 hours for this item.

Should returns be required:

Step 1) Contact us with this website email.

Step 2) Provide as much detail as possible about the problem you are having.

Step 3) Authorization to return the item will be issued.

Step 4) Return the item for the agreed replacement or refund.



## FAQ

Q1.Are you a manufacturer?

A1: Yes, we are an experienced manufacturer with our own molds and production lines.

Q2.How about quality of products?

A2: Our technicians and QC teams test the products one by one using aging line, professional devices and instruments to ensure the quality for all products.

Q3.How about price?

A3: We are a manufacturer and always offer our customers the most competitive prices.

Q4.How to place an order?

A4: Contact with online service, or sent email to us directly, we will reply to you with product price, specifications, packing etc. soon. Thank you.

Q5.May I buy samples from you?

A5: Yes! You are welcome to place sample order to test our superior quality and service, mixed samples are acceptable.

Q6.Can I visit your factory?

A6: Yes, welcome to visit our factory at your convenient time.

Q7.How can I make OEM or ODM orders?

A7: We have different print processing for different OEM/ODM orders. Please contact us with online service or send email to us directly.

Q8. How should I pay for my orders?

A8: You can pay by T/T, L/C at sight would be available for qualified bank and MOQ required for each order.

## Logistics

Sample order ship by DHL, UPS, FedEx, TNT, EMS etc

For mass order delivery, can be optional with terms of Exwork, FOB, CNF, CIF by air or by sea based on the buyer's forwarder or ours



## Certifications



## Exhibition & Fair



## Factory Show

